

MAN-MADE RADIO NOISE

PART I:

ESTIMATES FOR BUSINESS, RESIDENTIAL, AND RURAL AREAS



OT

U.S. DEPARTMENT OF COMMERCE / Office of Telecommunications

MAN-MADE RADIO NOISE

PART I: ESTIMATES FOR BUSINESS, RESIDENTIAL, AND RURAL AREAS

A. D. SPAULDING
R. T. DISNEY



U.S. DEPARTMENT OF COMMERCE
Frederick B. Dent, Secretary

Betsy Ancker-Johnson, Ph. D.
Assistant Secretary for Science and Technology

OFFICE OF TELECOMMUNICATIONS
John M. Richardson, Acting Director

JUNE 1974

U. S. Depository Copy



**UNITED STATES DEPARTMENT OF COMMERCE
OFFICE OF TELECOMMUNICATIONS**

STATEMENT OF MISSION

The mission of the Office of Telecommunications in the Department of Commerce is to assist the Department in fostering, serving, and promoting the nation's economic development and technological advancement by improving man's comprehension of telecommunication science and by assuring effective use and growth of the nation's telecommunication resources.

In carrying out this mission, the Office

- Performs analysis, engineering, and related administrative functions responsive to the needs of the Director of the Office of Telecommunications Policy, Executive Office of the President, in the performance of his responsibilities for the management of the radio spectrum
- Conducts research needed in the evaluation and development of telecommunication policy as required by the Office of Telecommunications Policy, pursuant to Executive Order 11556
- Conducts research needed in the evaluation and development of other policy as required by the Department of Commerce
- Assists other government agencies in the use of telecommunications
- Conducts research, engineering, and analysis in the general field of telecommunication science to meet government needs
- Acquires, analyzes, synthesizes, and disseminates information for the efficient use of the nation's telecommunication resources.

TABLE OF CONTENTS

	Page
LIST OF FIGURES	v
LIST OF TABLES	xi
ABSTRACT	1
1. INTRODUCTION	2
2. NOISE PARAMETERS	3
3. ESTIMATION METHODS AND THE DATA BASE	8
4. MAN-MADE RADIO NOISE ESTIMATES	12
4.1 Available Noise Power, F_a	12
4.1.1 Estimates of F_a for Typical Areas	13
4.1.2 Power Lines	36
4.2 The Average and Logarithmic Moments, V_d and L_d	44
4.3 Amplitude and Time Statistics	63
5. USE OF THE MAN-MADE NOISE ESTIMATES IN DETERMINING SYSTEM PERFORMANCE	86
6. MATHEMATICAL MODELING OF THE NOISE PROCESS	90
7. CONCLUSIONS AND DISCUSSION	93
8. ACKNOWLEDGMENTS	97
9. REFERENCES	99
APPENDIX A. MEASUREMENT METHODS USED TO OBTAIN THE DATA BASE	A1
REFERENCES, APPENDIX A	A12
APPENDIX B. THE USE OF TRAFFIC DENSITY INFORMATION AS A NOISE PREDICTOR	B1
REFERENCES, APPENDIX B	B11

LIST OF FIGURES

	Page
Figure 1. Estimates of median values of man-made noise expected at typical locations.	23
Figure 2. Distribution of location median values of man-made noise, 20 MHz residential area data.	24
Figure 3. Distribution of F_a values for a given location.	25
Figure 4. Expected variation of man-made radio noise levels at a location within an hour.	26
Figure 5. Estimates of man-made noise levels and their variation within an hour for business areas.	27
Figure 6. Estimates of man-made noise levels and their variation within an hour for residential areas.	28
Figure 7. Estimates of man-made noise levels and their variation within an hour for rural areas.	29
Figure 8. Estimates of man-made noise levels and their variation within an hour for interstate highways.	30
Figure 9. Estimates of man-made noise levels and their variation within an hour for parks and university campuses.	31
Figure 10. Radio-noise measurements, Dept. of Commerce Boulder Labs, end of Wing 1.	32
Figure 11. Radio-noise measurements, Dept. of Commerce Boulder Labs, end of Wing 1.	33
Figure 12. Hourly median values of radio noise, measured near highway in front of Dept. of Commerce Boulder Labs, October 25-28, 1967.	34
Figure 13. Horizontal versus vertical component of man-made radio noise at 250 MHz.	35

Figure 14. Decrease in power line noise with distance at 0.5 MHz.	39
Figure 15. Decrease in power line noise with distance at 102 MHz.	40
Figure 16. Power line noise measurements taken moving parallel to a 115 kV line in rural Wymoiing, both under the line and 1/4 mile from the line.	41
Figure 17. Expected decrease of radio noise radiated from 115 kV H-frame power line with distance from line.	42
Figure 18. Expected radio noise power, F_a , and its standard deviation, σ_{F_a} , from 115 kV, H-frame power transmission line. Receiving antenna under and 0.01 mi. (16.09 meters) from power line.	43
Figure 19. Mean of location median values of V_d , values measured in a 4-kHz bandwidth.	49
Figure 20. Mean of location median values of L_d , values measured in a 4-kHz bandwidth.	50
Figure 21. Mean of location median values of V_d , values measured in a 10-kHz bandwidth.	51
Figure 22. Mean of location median values of L_d , values measured in a 10-kHz bandwidth.	52
Figure 23. Expected median values of V_d and L_d for business areas.	53
Figure 24. Expected median values of V_d and L_d for residential areas.	54
Figure 25. Expected median values of V_d and L_d for rural areas.	55
Figure 26. Distribution of V_d within an hour for a residential area.	56
Figure 27. Distribution of L_d within an hour for a residential area.	57

Figure 28.	Median values of V_d measured along interstate highways, in parks, and on university campuses.	58
Figure 29.	Median values of L_d measured along interstate highways, in parks, and on university campuses.	59
Figure 30.	V_d for horizontal component of man-made noise versus V_d for vertical component.	60
Figure 31.	Correlation of V_d and L_d for man-made noise.	61
Figure 32.	Lack of correlation of F_a and V_d for man-made noise.	62
Figure 33.	Amplitude probability distribution of envelope of man-made radio noise at 48 MHz.	67
Figure 34.	Amplitude probability distribution of man-made noise at 102 MHz.	68
Figure 35.	Amplitude probability distribution of man-made noise at 102 MHz.	69
Figure 36.	Amplitude probability distribution of man-made noise at 102 MHz.	70
Figure 37.	Amplitude probability distribution of man-made noise at 48 MHz, 10 kHz bandwidth.	71
Figure 38.	Randomly selected 200 ms sample of noise envelope from a 6-minute, 250 MHz central Colorado Springs recording.	
Figure 39.	Normalized autocovariance for the noise sample of figure 38.	73
Figure 40.	Amplitude probability distribution for a 6-minute sample of noise recorded in central Colorado Springs.	74
Figure 41.	Average positive crossing rate characteristic for the sample of noise of figure 40.	75
Figure 42.	Pulse duration distributions for the sample of noise of figure 40.	76

Figure 43. Pulse spacing distributions for the sample of noise of figure 40.	77
Figure 44. Randomly selected 200 ms sample of noise envelope from a 6-minute 48 MHz, Denver, Colorado, residential area.	78
Figure 45. Normalized autocovariance for the noise sample of figure 44.	79
Figure 46. Randomly selected 200 ms sample of noise envelope from a 6-minute, 48 MHz, Denver, Colorado, residential area.	80
Figure 47. Normalized autocovariance for the noise sample of figure 46.	81
Figure 48. Amplitude probability distribution for a 6-minute sample of noise recorded in a residential area of Denver, Colorado.	82
Figure 49. Average positive crossing rate characteristic for the sample of noise of figure 48.	83
Figure 50. Pulse duration distributions for the sample of noise of figure 48.	84
Figure 51. Pulse spacing distributions for the sample of noise of figure 48.	85
Figure 52. Comparison of present estimates with JTAC (1968) estimates.	98
Figure A1. Block diagram of the measuring and recording facilities in the OT/ITS mobile radio noise lab.	A13
Figure A2. Block diagram of the analog-recording-playback system.	A14
Figure A3. Block diagram of the correlation measurement system.	A15
Figure A4. OT/ITS mobile radio-noise lab system noise factors.	A16

Figure B1. Regression of 5.0 MHz $F_{a\mu}$ with log population density of SLA's.	B12
Figure B2. Linear regression of $F_{a\mu}$ vs. log hourly traffic count along 26 thoroughfares at 48 MHz.	B12
Figure B3. Correlation coefficients along with the 95 percent confidence limits for each of measurement frequencies, $F_{a\mu}$ vs. log hourly traffic count.	B13
Figure B4. Hourly median values of radio noise power and hourly traffic count. Broadway, Boulder, Colorado, October 25-27, 1967, noise values recorded 100 ft west of highway center.	B14
Figure B5. Distribution of radio noise power at 20 MHz radiated from 958 individual vehicles, values measured at 50 ft from vehicle.	B15
Figure B6. Distribution of radio noise power at 48 MHz radiated from 958 individual vehicles, values measured at 50 ft from vehicle.	B15

LIST OF TABLES

	Page
Table 1. Expected Variation of Median Values about Estimates for Business, Residential, and Rural Locations.	15
Table 2. Expected Variation, Man-Made Radio Noise Levels, about the Median Value for a Location, within the Hour.	17
Table 3. Variation of the Median Value of V_d and L_d with Location for a Given Frequency and Bandwidth.	45

MAN-MADE RADIO NOISE

PART I: ESTIMATES FOR BUSINESS, RESIDENTIAL, AND RURAL AREAS

A. D. Spaulding and Robert T. Disney*

The Office of Telecommunications, Institute for Telecommunication Sciences (OT/ITS), over the past several years, has accumulated a data base of man-made radio noise measurements in the frequency range from 250 kHz through 250 MHz taken in a number of geographical areas. This data base has been analyzed to provide estimates of the expected characteristics of man-made radio noise in business, residential, and rural areas. The parameters used are the average available power spectral density, the ratio of the rms to the average voltage of the noise envelope, and the ratio of the rms to the average logarithm of the envelope voltage. The variation of these parameters as a function of frequency, location, and time are shown and discussed. Examples of amplitude and time statistics of the received man-made radio noise process also are shown and discussed. The use of the estimates is shown (principally by references in Part II, Bibliography) in the solution of problems encountered in frequency management and telecommunication system design.

Key words: Man-made radio noise, noise levels, noise characteristics, non-Gaussian noise, impulsive noise, system performance.

* The authors are with the Institute for Telecommunication Sciences, Office of Telecommunications, U.S. Department of Commerce, Boulder, Colorado 80302.

1. INTRODUCTION

The interference environment present at a receiving terminal of a telecommunications system is one of the factors determining whether or not that link of the system will perform satisfactorily. In either the solution of a spectrum management problem or the design of a particular system, the determination of system performance is a prime consideration. In spectrum management, not only is information on the effect of the interference environment on the proposed system necessary, but also the change in the environment caused by the proposed system must be considered. In the design of any proposed system, these two effects need to be considered, though the effect of the environment on the system is generally the primary concern.

The interference environment will consist of all discrete signals present other than the desired signal (usually referred to as unwanted or undesired signals), broadband impulsive noise, the receiver's own internally generated noise, and various other unintended radiations. Often this composite interference environment, whether predominantly noise or unwanted signals, is referred to simply as "noise." In this report, the impulsive noise background will be termed "noise." This radio noise, as distinguished from unwanted signal interference, is a broad-band phenomenon often covering several octaves in frequency, and its spectrum can be considered flat across any bandwidth that is a small percentage of the center frequency of the receiving system.

In order to estimate the behavior of a telecommunications system at some future time, two types of interference information are required. One is the determination of the effect of all of the various kinds of interference environments on the system under consideration, and the other is the estimate of the interference environment that will be present at the time and place of actual system operation. The latter

involves a prediction process for estimating the characteristics of the environment within some degree of accuracy. The primary purpose here is to provide the best estimate possible of those characteristics of the noise process basic to systems design and analysis. In addition, some guidance in the use of these estimates in determining system performance is given in the text and in the references. To provide a better understanding of the estimates, short descriptions of the data base used for preparing the estimates and the equipment employed in the measurement program are included.

Part II of the report is a bibliography listing publications which give man-made noise measurements, techniques of measurement, and system design and analysis in impulsive noise environments.

2. NOISE PARAMETERS

The characteristics of the interference environment that determine the performance of a system will be dependent on the modulation-demodulation scheme employed; however, some characteristics of the radio noise process will greatly influence the operation of any system regardless of the detection scheme used. The most basic single parameter of the broadband interference is its power spectral density; that is, the noise power per unit bandwidth (OTP, 1970). This parameter must be known as a function of time, location, and frequency and should be given in a form which allows it to be compared with and combined with other types of interference, such as unwanted signals, internal receiver noise, etc. For the proper design or analysis of any modem, the probability density function of the detected noise envelope is generally required. This is generally given as the percentage of time the envelope voltage exceeds various voltage levels and as such is the amplitude probability distribution (APD). While the APD gives the amplitude behavior of the noise process, the time behavior is

also of importance for many types of interference. The time statistics most generally required for system analysis are the autocovariance function, the average crossing rates of the noise envelope (ACR), pulse spacing distributions (PSD), and pulse duration distributions (PDD). The last three, the ACR, PSD, and PDD, are a function of envelope voltage level. The above statistics are for the detected noise envelope; that is, for the noise process as seen by the receiving system under consideration (Montgomery, 1954; Watt et al., 1958; Middleton, 1960; CCIR, 1964, 1966; Wozencraft and Jacobs, 1965; Conda, 1965; Halton and Spaulding, 1966; Hall, 1966; JTAC, 1968; Bello and Esposito, 1969, 1970; Crippen et al., 1970; Akima et al., 1969; Omura, 1969; Shaver et al., 1972; Gilliland, 1972; and others in Part II, Bibliography). The envelope statistics are required since we are, in general, dealing with a narrowband noise process (i.e., describable by an envelope and phase) and the phase is uniformly distributed.

The basic unit used to describe the noise in these predictions is the power spectral density expressed in terms of an effective antenna noise factor, F_a (CCIR, 1957, 1964; OTP, 1970). The definition of F_a is

$$F_a = 10 \log_{10} f_a, \quad (1)$$

where

$$f_a = \frac{p_n}{kT_o b} \quad (2)$$

and p_n is the external noise power available from an equivalent lossless antenna in bandwidth b , in watts, k is Boltzmann's constant $= 1.38 \times 10^{-23}$ Joules/°K, T_o is the reference temperature $= 288^\circ$ K, and b is the noise power bandwidth in hertz. Note that f_a is a dimen-

sionless quantity, being the ratio of two powers. The quantity f_a , however, gives, numerically, the available power spectral density in terms of kT_o and the available power in terms of $kT_o b$. For this reason, one commonly sees F_a with units attached (i. e., $\text{dB} > kT_o$ or $\text{dB} > kT_o b$).

Relation (2) can be given as

$$P_n = F_a + B - 204 \text{ dBW} , \quad (3)$$

where $P_n = 10 \log p_n$, $B = 10 \log b$, and $-204 = 10 \log kT_o$.

Other methods commonly used to express the noise power are related simply to F_a (CCIR, 1957). For example, for the case of a short ($h \ll \lambda$) grounded vertical monopole, the corresponding vertical component of the rms field strength is given by

$$E_n = F_a + 20 \log f_{\text{MHz}} + B - 95.5 \left(\text{dB} > \frac{1 \mu\text{V}}{\text{m}} \right) , \quad (4)$$

where E_n is the rms field strength for the bandwidth b in $\text{dB} > 1 \mu\text{V}/\text{m}$, f_{MHz} is the frequency in megahertz, and λ is the wavelength in meters. Similar expressions for E_n can be derived for other antennas.

The relationship between f_a and the noise power in terms of an effective antenna noise temperature is given by

$$f_a = T_a / T_o , \quad (5)$$

where T_a is the effective antenna noise temperature in $^\circ\text{K}$.

Since the noise level may result from a combination of noise generated internal to the receiving system and external noise, it is convenient to express the resulting noise by means of Norton's (1953) generalization of Friis' (1944) definition of the noise figure of a radio receiver. The system noise factor can be defined in terms of the

losses and actual temperatures of the various parts of the system. Loss in the circuit is taken here to be the ratio of available input power to available output power and will differ from the loss in delivered power unless a matched load is used. The noise factor of the antenna circuit, f_c , is

$$f_c = 1 + \frac{T_c}{T_o} (\ell_c - 1), \quad (6)$$

where ℓ_c is the loss factor in the antenna and associated circuit, T_c is the actual temperature of the antenna circuit and nearby ground, and T_o is the reference temperature (288°K).

Similarly, the transmission line loss factor, ℓ_t , and temperature, T_t , will determine a noise factor, f_t , for the transmission line given by

$$f_t = 1 + \frac{T_t}{T_o} (\ell_t - 1). \quad (7)$$

Using a receiver noise factor of f_r , and assuming the receiver is free of spurious responses, we can use Friis' method of combining noise figures in cascade to obtain a system noise factor, f , including external noise, f_a , which is

$$f = f_a + (\ell_c - 1) \frac{T_c}{T_o} + \ell_c (\ell_t - 1) \frac{T_t}{T_o} + \ell_c \ell_t (f_r - 1). \quad (8)$$

If all temperatures are equal to T_o , equation (8) becomes

$$f = f_a - 1 + f_c f_t f_r. \quad (9)$$

The rms of the noise envelope voltage was used for all power measurements taken for this report. Calibration techniques allow this rms measurement to be referred to the terminals of an equivalent loss -

less antenna and given in terms of F_a in decibels. With the exception of the few measurements made using a half wave dipole in a corner reflector, all values of F_a were obtained using a short vertical antenna.

For an envelope having a deterministic waveform, a definite relationship between the rms voltage, the mean voltage, and other average values (such as the antilog of the mean logarithm, ALML, of the envelope voltage) can be found. A simple case would be a sine wave modulation, and a trivial case would be a constant CW signal. In the case of a random waveform such as that resulting from broadband impulsive noise, no definitive relationship exists. The ratios of the rms to the mean and ALML of the noise envelope voltage vary as the impulsive character of the noise varies with time, location, and frequency. A knowledge of these ratios provide useful information on the impulsive character of the received noise. For example, the ratio of the rms to the mean for white Gaussian noise is approximately 1 dB, while the ratio of the rms to the ALML is approximately 2.5 dB. As the noise becomes more impulsive in nature, these ratios will increase. Thus, if these ratios are known, or can be predicted, some information can be inferred on the distribution of the instantaneous envelope voltages (APD). Since the APD is required information for determining the expected performance of telecommunications systems, estimates of the expected values of these two ratios are useful. The ratio of the rms to the mean voltage is the voltage deviation (V_d in decibels). The ratio of the rms to the antilog-mean logarithm of the envelope voltage is the log deviation (L_d in decibels). For detailed definitions, see Crichlow, et al. (1960).

A direct relationship between the predicted moments (F_a , V_d , and L_d) and the most likely or expected APD is not presently available for man-made noise in a form such as that given for atmospheric radio noise by Crichlow et al. (1960) and later adopted in a simplified form

by CCIR (1964). A given APD will define a unique set of moments. The converse is not true, however, as a given set of the three moments could have resulted from any one of a family of APD's. The man-made noise generally is composed of contributions from a number of sources and will change rapidly in character with time and location as the noise contributions from the various sources change in relative amplitude. On the average, an APD similar to that observed for atmospheric radio noise is found for man-made radio noise. Typical APD's and their variations have been given for urban residential man-made radio noise by Spaulding et al. (1971).

3. ESTIMATION METHODS AND THE DATA BASE

Estimates of future man-made radio noise levels and other characteristics of the noise process can be of two forms. One is based directly on past measurements, and the other depends on the correlation of the noise with some predictable parameter of the environment for use as a "predictor" of the future noise. The first form, based on past measurements of the behavior of the noise at "typical" locations, assumes that the behavior patterns noted will continue into the future. The direct analysis of the available data base will then provide the estimates of the future man-made radio noise conditions that will exist at other locations. This process has been used to obtain the predictions for three types of locations: business areas, residential areas, and rural areas. The business area is defined here as any area where the predominant usage throughout the area is for any type of business. This includes stores and offices, industrial parks, large shopping centers, main streets or highways lined with various business enterprises, etc. The residential area is defined here as any area used predominantly for single or multiple family dwellings with a density of at least two

single family units per acre and no large or busy highways. An occasional isolated business such as a drugstore or filling station can be included, but a city block or more of concentrated business enterprises should be considered a business area. This definition applies to both urban and suburban residential areas. Rural areas are defined here as locations where land usage is primarily for agricultural or similar pursuits, and dwellings are no more than one every five acres.

In attempting to group the measurements in the data base into these classifications, some areas were found unsuitable for inclusion in any of the three groups. Some notable examples of these areas are interstate highways outside of the main towns or cities and fairly large parks and university campuses within cities. The available data for these three types of areas were not included in the general analysis but were analyzed separately to give an indication of what might be expected at such locations. In using the predictions, personal judgment will have to be used in selecting the "typical" area classification to be employed for any specific estimate.

The data base used in this report consists of some 300 hrs of F_a , V_d , and L_d data collected for each parameter simultaneously on eight frequencies over the period from 1966 through 1971. The measurements were made in six states--Colorado, Maryland, Texas, Virginia, Washington, Wyoming--and in Washington, D.C. The measurements were made in 103 areas; the area size ranging from a few square blocks in a business area to several square miles in some of the rural locations; the criteria usually being that the type of area remain the same for any one set of measurements or a measurement run. The period of measurement for each mobile run varied from approximately 15 min to over an hour. A few stationary measurements were made for a period of 24 hrs or longer. For many of the mobile runs in the business

and residential areas, average vehicle density information was obtained from past vehicle counts made by the local traffic engineering groups for the highways included in the area of the run. During one period, actual traffic counts were obtained during the measurement period.

The measurements used in the analysis for business areas were recorded at 23 areas in Boulder, Colorado Springs, and Denver, Colorado; San Antonio, Texas; Cheyenne, Wyoming; and Washington, D.C. The residential area data consist of measurements made at 38 areas in the cities and suburbs of Boulder, Colorado Springs, and Denver, Colorado; San Antonio, Texas; and Cheyenne, Wyoming. The data used for rural areas were recorded in 31 rural areas in Colorado, Maryland, Virginia, Washington, and Wyoming. Continuous runs were made for 24 hrs on the grounds of the Department of Commerce Boulder Laboratories. Two locations were used for these runs, one near the main radio building and the other near Broadway (the main highway passing in front of the Laboratory grounds). Additional data are in the ITS man-made radio noise data base, but they were not used for the present purpose because of the incomplete frequency coverage of those measurements or because of the specialized nature of the individual measurements.

To insure the complete compatibility of all data used to provide the estimates in this report, only data recorded using the OT/ITS equipment in the mobile radio noise laboratory were considered. A description of this equipment and the mobile noise laboratory is given in Appendix A. With the exception of the 24-hr runs on the Boulder Laboratory grounds, all measurements were made during the daytime hours, generally in the pre-noon period when atmospheric radio noise was at a low enough level so that man-made radio noise was the predominant factor at all frequencies. At times, the atmospheric radio noise dominated the readings at the lower frequencies in rural areas, but

these periods were edited out of the data as well as possible before the analysis was performed.

In some instances, again principally in rural locations, some limitation at 250 MHz was experienced due to the recording system noise factor (Appendix A, fig. A4).

Most of the data were recorded using short vertical monopole antennas essentially at ground level. No attempt has been made here to provide information on the effect of antenna height or direction of arrival of the man-made radio noise. Measurements during a short run using two dipole antennas in corner reflectors at 250 MHz simultaneously with one antenna in a vertical and the other in a horizontal configuration provide some information on the effect of polarization of the received man-made radio noise.

The second type of estimation involves the correlation of the received noise with various aspects of the environment which can be used as "predictors." There are three requirements for a predictor if it is to be of value in determining expected future interference levels. First, of course, the noise must correlate well with the statistics of the predictor. The second requirement is that statistical information concerning the predictor must be readily available, and third, an estimate of the future pattern of behavior of the predictor must be available. If these three requirements are met, then an estimate of the pattern of behavior of the predictor in the future will provide an estimate or prediction of man-made radio noise interference for the same future period. A number of possible predictors have been investigated, including obvious ones such as population density, electrical power consumption, and traffic density. The most successful predictor found to date in the frequency range above about 20 MHz is traffic density (Spaulding, 1971; Spaulding et al., 1971), and a method of estimating noise levels from automotive ignition systems near main highways is given in Appendix

B. This, combined with traffic engineering estimates of future highway usage, may provide the best estimate of future radio noise levels at many locations.

Relatively good correlation was found between power consumption in an area and the radio noise power below 20 MHz. Unfortunately, in most areas, statistics on power consumption are very difficult, if not impossible, to obtain. Statistics on population density are readily available for small areas (called a standard location area or SLA for the 1960 census) from the Census Bureau. Population density in a SLA, however, shows very poor correlation with the noise level measured in the SLA (Spaulding et al., 1971).

4. MAN-MADE RADIO NOISE ESTIMATES

4.1 Available Noise Power, F_a

In determining the expected man-made radio noise power and its variation for any given location from measurements made at other locations, several factors must be taken into consideration. The main factor, of course, is the similarity between the areas where the measurements were made and the area in question. For any particular location the noise level may be due to particular sources, such as factories in which a large number of arc welders are employed, power lines, etc. The estimates given here are in terms of business, residential, and rural areas, and a physical examination of the area in question should determine which of these types of areas will most closely correspond to the selected area. In addition to these three basic types of areas, estimates are also given for interstate highways and parks and university campuses. Estimates for power lines are also given.

4.1.1 Estimates of F_a for Typical Areas

Using all accumulated data in the data base, the areas where measurements were made were divided into the business, residential, and rural classifications. These divisions were chosen because they can be easily defined and recognized. All data used in this report were measured at ground level. The man-made noise may be quite different at some elevations above ground level or in areas that cannot be logically placed in one of the three classes of areas chosen due to peculiar local conditions. Since the data given are intended for estimating the noise conditions at average locations, data containing these strictly local, unusual effects have not been used.

After the division of the data into the various classes, each set of data was analyzed using the recorded values of F_a . Using the individual median values of the sets of mobile runs (see Appendix A) for each type of area, a linear regression line was found by a least squares fit for F_a , in decibels versus the logarithm of the frequency, for each area. The three regression lines were quite close in slope, showing less than 2 dB per decade of frequency difference. The data for all cases and all frequencies were then combined to find the slope giving the best fit to all the data. A standard statistical test for significance in the differences of the various slopes (one for each of the three types of areas and one for all data) showed that the slopes could all be considered equal to -27.7 dB per decade at the 95 percent confidence level. Linear regression, with the slope constrained to this value, was then used to obtain figure 1. Figure 1 provides an estimate of the median radio noise power spectral density that will be found at that type of location as a function of frequency.

At 250 MHz, at rural locations especially, the system noise figure (Appendix A) was close to the available external radio noise. Since a value related to system noise is recorded (by taking a meter reading

of F_a with the input connected to a dummy antenna in place of the recording antenna) at the time of calibration, a means of approximately determining the system noise factor for any run is available. When the system noise factor and the recorded values were close to the same level, the values were discarded or corrected to remove the effect of system noise on the value of F_a . If the recorded value was within 0.5 dB of system noise, the recorded values were discarded. If the recorded value was more than 0.5 dB but less than 6 dB above system noise, the reading was corrected by converting the reading from a decibel value to a power value, subtracting the system noise power and converting the difference back to a value of F_a . Because of this loss of the lowest values at 250 MHz, there is still an unresolved question of whether the - 27.7 dB/decade rate of change of F_a with frequency is valid to 250 MHz, since all 250 MHz measured medians (and in some cases, the lower decile values) are above the estimated median value line.

In addition to the expected values of man-made radio noise at business, residential, and rural areas, a value for quiet rural areas from CCIR (1964) is also shown on figure 1. These values were obtained from measurements at rural locations chosen with great care to insure low levels of man-made radio noise and probably represent a lower limit of levels to be found. Galactic noise levels are also shown on figure 1 for frequencies above 10 MHz. The level of the galactic noise will vary greatly between 10 and approximately 30 MHz, depending upon the behavior of the ionosphere. Above these frequencies, though, the levels will remain quite constant (Crichlow et al., 1955).

Since the figure 1 estimates for business, residential, and rural locations represent the average values of all similar locations, the variation about the average must be determined next. This variation from location to location in similar areas is indicated by the standard

Table 1. Expected Variation of Median Values about Estimates for Business, Residential, and Rural Locations.

Frequency in MHz	Standard Deviation, σ , in dB		
	Business	Residential	Rural
0.25	6.12	3.54	3.89
0.5	8.21	4.28	4.40
1.0	2.33	2.52	7.13
2.5	9.14	8.06	8.02
5.0	6.08	5.54	7.74
10.0	4.15	2.91	4.03
20.0	4.93	4.65	4.53
48.0	7.13	3.98	3.23
102.0	8.76	2.73	3.82
250.0	3.77	2.87	2.26
σ_T^*	7.00	5.00	6.45

* σ_T = Standard deviation of all measured medians about regression line of figure 1.

deviation, σ_T , given in table 1. The value of σ_T is given for each of the three types of areas and is the value obtained by using the data at all frequencies to obtain the standard deviations about the regression line shown for each type of location.

Table 1 also gives the standard deviation, σ , at each of the measurement frequencies. A better estimate of the variation of the median values for these typical areas at any given frequency might possibly be obtained by interpolation of the σ 's for the measurement frequencies rather than using σ_T .

An example of the location variation for a given frequency and area type is shown on figure 2. Shown on figure 2 is the cumulative distribution of the median values obtained from residential areas at 20 MHz. Also shown is the estimate for a residential area at 20 MHz from figure 1 and this estimate plus and minus σ and σ_T (from Table 1).

Once the best estimate of the median value of F_a for a given location has been found, the next point to consider is the variation of F_a at that location with time. A number of time periods are of concern in determining the temporal variation to be expected. The first is the expected variation within a period up to one hour. In the noise measurement method used, 10-sec samplings of the running average of F_a were recorded where the time constant for the power moment, F_a , was approximately 50 sec. Thus, 360 sample values were obtained for each hour of recording time. Again, using a 20 MHz residential area run, as an example, figure 3 shows a typical cumulative distribution of the individual F_a values measured within an hour at a location. These values were measured May 4, 1967, between 0839 and 0939 local standard time in Boulder, Colorado. Also shown on figure 3 are the upper and lower decile values.

Table 2 and figure 4 show the estimates of the ratios, in decibels, of the upper decile value to the median, D_u , and of the median to the lower decile, D_l . These values can be used to estimate the variation of F_a about the estimated median (from fig. 1) for periods from several minutes up to one hour.

The data were analyzed to obtain the median value of F_a for each measurement location and also the ratio in decibels of the upper and lower decile values to the median. Figure 5 shows the results of this analysis for all measurement locations considered business areas, giving the mean value of the business area location medians and the 27.7 dB per decade regression line (from fig. 1) along with the expected variation within an hour. The root-mean-square of all the business locations D_u 's and D_l 's for each frequency is given on figure 5 to show the expected variation within an hour. The same information is given on figure 6 for residential areas, figure 7 for rural areas, figure 8 for interstate highways, and figure 9 for parks and university campuses.

Table 2. Expected Variation, Man-Made Radio Noise Levels, about the Median Value for a Location, within the Hour.

Frequency MHz	Business Area		Residential Area		Rural Area	
	D_u (dB)	D_l (dB)	D_u (dB)	D_l (dB)	D_u (dB)	D_l (dB)
0.25	8.1	6.1	9.3	5.0	10.6	2.8
0.5	12.6	8.0	12.3	4.9	12.5	4.0
1.0	9.8	4.0	10.0	4.4	9.2	6.6
2.5	11.9	9.5	10.1	6.2	10.1	5.1
5	11.0	6.2	10.0	5.7	5.9	7.5
10	10.9	4.2	8.4	5.0	9.0	4.0
20	10.5	7.6	10.6	6.5	7.8	5.5
48	13.1	8.1	12.3	7.1	5.3	1.8
102	11.9	5.7	12.5	4.8	10.5	3.1
250	6.7	3.2	6.9	1.8	3.5	0.8

The next longer time period of interest is the diurnal variation that can be expected. Since the measurements of man-made radio noise consisted of values at MF and HF as well as the higher frequencies, most of the measurements (all the measurements discussed to this point) were taken between about 0830 and 1500 LST. During this period, atmospheric radio noise is at its lowest level and is least likely to affect the readings. The predictions so far presented can, therefore, be considered the values of man-made radio noise for the hours of daylight. Several 24-hour continuous runs have been made on the grounds of the Department of Commerce, Boulder Laboratories. Some of these runs were made at the end of wing 1 near the parking areas. The hourly median values of F_a recorded on April 27-28, 1971, are shown on figure 10. This particular run was started at 0930, LST on April 27 and ended at 0900 LST on April 28. Several items are noteworthy on

this figure. First are the relatively high levels caused by atmospheric radio noise between 1800 on April 27 to 0700 on April 28 on the three lower frequencies, and to a lesser degree, present in the 20 MHz values. A peak is observed between 1600 and 1700 on the 2.5 and 5 MHz, but not on the 250 kHz. This would indicate two things. The levels throughout the day on 250 kHz probably are determined by the atmospheric radio noise rather than man-made. The peak on 2.5 and 5 MHz probably is a true man-made radio noise level and was associated with power lines since it was not nearly as predominant (though noticeable) on the four higher frequencies. The low, rather steady levels on 102 MHz at 8 to 10 dB probably were caused by a combination of set noise and galactic noise. Set noise was measured at 7.4 dB, and the expected galactic noise would be 6 ± 2 dB. Combining these two values would give an expected level of 9.8 ± 1 dB. The balance of the values shown on figure 10 probably are all predominantly man-made radio noise. The data shown on figure 10 for 0.25, 10, and 48 MHz are also shown on figure 11 and compared with the data recorded on April 19 and 20, 1967, and on May 11 and 12, 1971. Most of the noise recorded on 250 kHz was atmospheric in origin though the lower values recorded on April 29 and 30, 1967, were from man-made noise. Perhaps the most interesting feature of this figure is the high spike on May 12, 1971, at 48 MHz and the corresponding high reading on 20 MHz. This particular run was started at 1055 LST, but daylight saving time was in effect, and the clock time was 1155 MDST. Since only 5 min of recordings were used to obtain this value, the median was greatly influenced by the heavy traffic density of employees' leaving for lunch. The hourly medians on frequencies of 20 MHz and above are generally influenced by beginning of work, lunch hour, and end of work times, though the effect is somewhat hidden when the median value for the whole hour is considered. The May 12 recording suggests that a 5-min median could

be expected to increase by some 15 dB near a parking lot during a peak traffic period. The expected galactic noise level is shown for 20 and 48 MHz. The lowest levels on both of these frequencies were greatly influenced by this type of noise. While it appears that the 1967 data are generally lower than the 1971 data, no significant yearly trends can be established on this basis. It is interesting to note that the day-to-day variation shown here is considerably less than that predicted within the hour as indicated by the decile values for business areas, figure 5, and residential areas, figure 6.

A continuous three-day run was made with the mobile radio noise laboratory parked on the DOC Boulder Laboratories grounds near Broadway (a main highway on the east side of the Laboratories). The diurnal variation of the noise measured at this location is shown on figure 12. The days shown are Wednesday afternoon, October 25, 1967, through Saturday morning, October 28, 1967. The levels recorded are greatly influenced by traffic patterns at this location, as is discussed in greater detail in Appendix B. The repeatability of the diurnal variation from such a location can be seen from figure 12. The 24-hr pattern shows little variation on the three work days--Wednesday, Thursday, and Friday. It is especially interesting to note the same pattern is repeated on Saturday after 0800, but that the "morning rush hour noise," between 0600 and 0800, is not present on Saturday, a nonworkday for most. Comparing figures 11 and 12, quite good agreement is found for the measurements between 0100 and 0400 when traffic on Broadway is at the lowest. For the rest of the day, the noise near the highway is 5 to 10 dB higher than the noise at the end of wing 1, which is several hundred feet from the highway.

For certain areas where activities are seasonal (resort areas, industrial areas where the work is seasonal such as canneries, etc.),

an estimate of the seasonal variation of the man-made radio noise levels may be required. In some areas this variation can be estimated on the basis of a change in the type of area. The area may be considered a business area if the increased activity causes an increase in the business or industrial activity during a given season and essentially a residential or rural area during the balance of the year. Since this seasonal variation is so dependent on actual location usage, no general estimates of seasonal variation can be given.

The longest time period of interest is the change of noise levels from year to year. Here again, growth in a given area may change the general nature so that the area may go from rural to residential or residential to business (or in a few cases, the reverse) in a period of one year or more. Therefore, long-range estimates can to some extent be predicated on growth potentials in the area. Trends in the increase in electric power consumption and the number of registered automobiles (both possible predictors of man-made noise) are given for the United States as a whole in JTAC (1968). This type of information indicates that the total man-made interference is increasing in the United States but does not provide data helpful in estimating the noise environment at a given location. In a well established business area where streets are already crowded with vehicles, the annual change will be very small. For example, measurements were made by ITS in downtown Washington, D.C., in 1960 and repeated in 1966. The comparison of the two sets of recordings showed that the change in man-made radio noise was negligible over the 6-yr period. The level at a given location in the area varied by as much as 8 dB between the two sets of measurements, but the median value for the area increased by less than 2 dB in the 6-yr period. Since variations of these magnitudes are found on a day-to-day basis, even in a single area, they cannot be considered significant over the 6-yr period. During this same period,

the number of automobiles registered in and near Washington, D.C., increased considerably as did the population. The measured radio noise was predominantly from power distribution lines at the lower frequencies and from vehicle ignition systems at the higher frequencies. Over the 6-yr period, no major change was made to the power distribution system and only minor changes in types of business and amount of power supplied in the area. It probably is reasonable, therefore, to expect little change in the man-made radio noise levels at the lower frequencies. Improvement in ignition noise suppression techniques used by the manufacturers over this period would explain some of the lack of increase in the measured levels at the higher frequencies. Since the streets were already crowded in 1960, vehicle density in that particular area was not changed to any large extent by the greater number of cars in the larger areas. This does not imply that the man-made radio noise remained constant in surrounding areas. Areas that were rural in 1960 and were developed into residential or business areas by 1966, areas where traffic density showed large increases, and areas that changed in character and/or where power consumption increased drastically probably would have shown an increase in the man-made noise levels.

All of the measurements used in obtaining the above estimates were made using a vertical omnidirectional antenna and, therefore, strictly speaking can be considered only as estimates of the vertical component of the radio noise. Very few data are available on the relationship between the vertically and horizontally polarized components. The information that is available indicates that on the average there probably is very little difference in the rms level of the two components. The AMA (1971) and Doty (1971) show peak voltage measurements on individual automobiles and an array of automobiles using a log periodic

antenna in a horizontal and vertical configuration with the center line of the antenna at a height of 10 ft and measuring over a frequency range from 20 MHz to 1 GHz. These measurements indicate that the vertical component may be higher than the horizontal component between 30 and 36 MHz and between 210 MHz and 1 GHz, and there may be as much as 10 dB difference at certain frequencies. Doty also shows the horizontal component as much as 5 dB higher in the frequency range from 63 to 210 MHz. The spectrum was swept from 20 MHz to 1 GHz in approximately 6 min with the antenna in a horizontal position for one sweep and then in a vertical position for the next.

The results of a small sample of measurements made recently by ITS at 250 MHz using two halfwave dipoles in corner reflectors 10 ft above ground are given in figure 13. Two short runs were made with one antenna in a horizontal and the other in a vertical configuration. The measurements were made simultaneously on the two configurations. During one run, the antennas were separated by a distance of 10 ft, while antenna separation was 50 ft during the other run. The offset of 0.559 dB in the equation for the linear regression line is no doubt due to a slight difference in gain settings in the two channels. Even though a fair amount of spread about the regression line is noted, the best estimate of the difference between the vertical and horizontal components is less than 1 dB. Admittedly, both of these samples are relatively small and, therefore, may or may not be representative of the effects of polarization.

All of the above can be used either in a quantitative or qualitative way to assess the best estimate of the level of the average power of the man-made radio noise for a given location and its variation within various time frames.

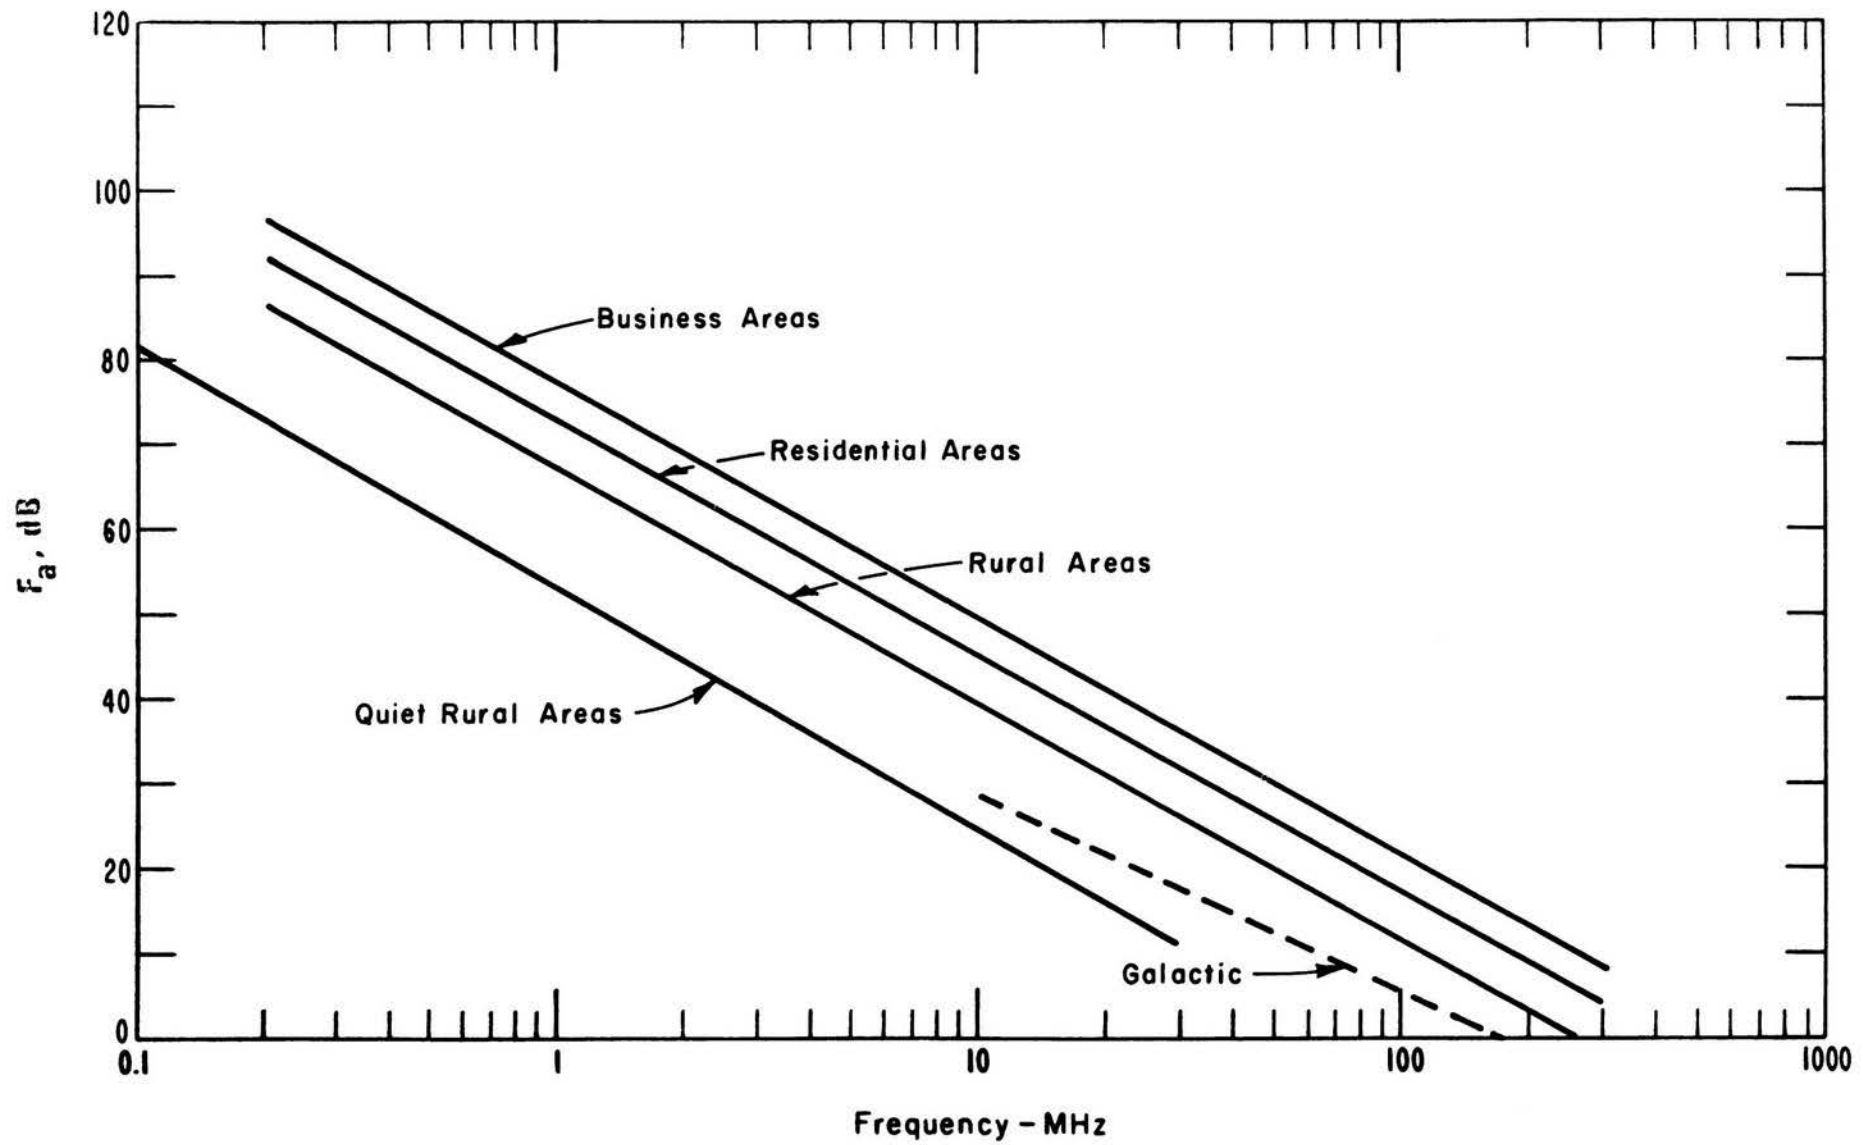


Figure 1. Estimates of median values of man-made noise expected at typical locations.

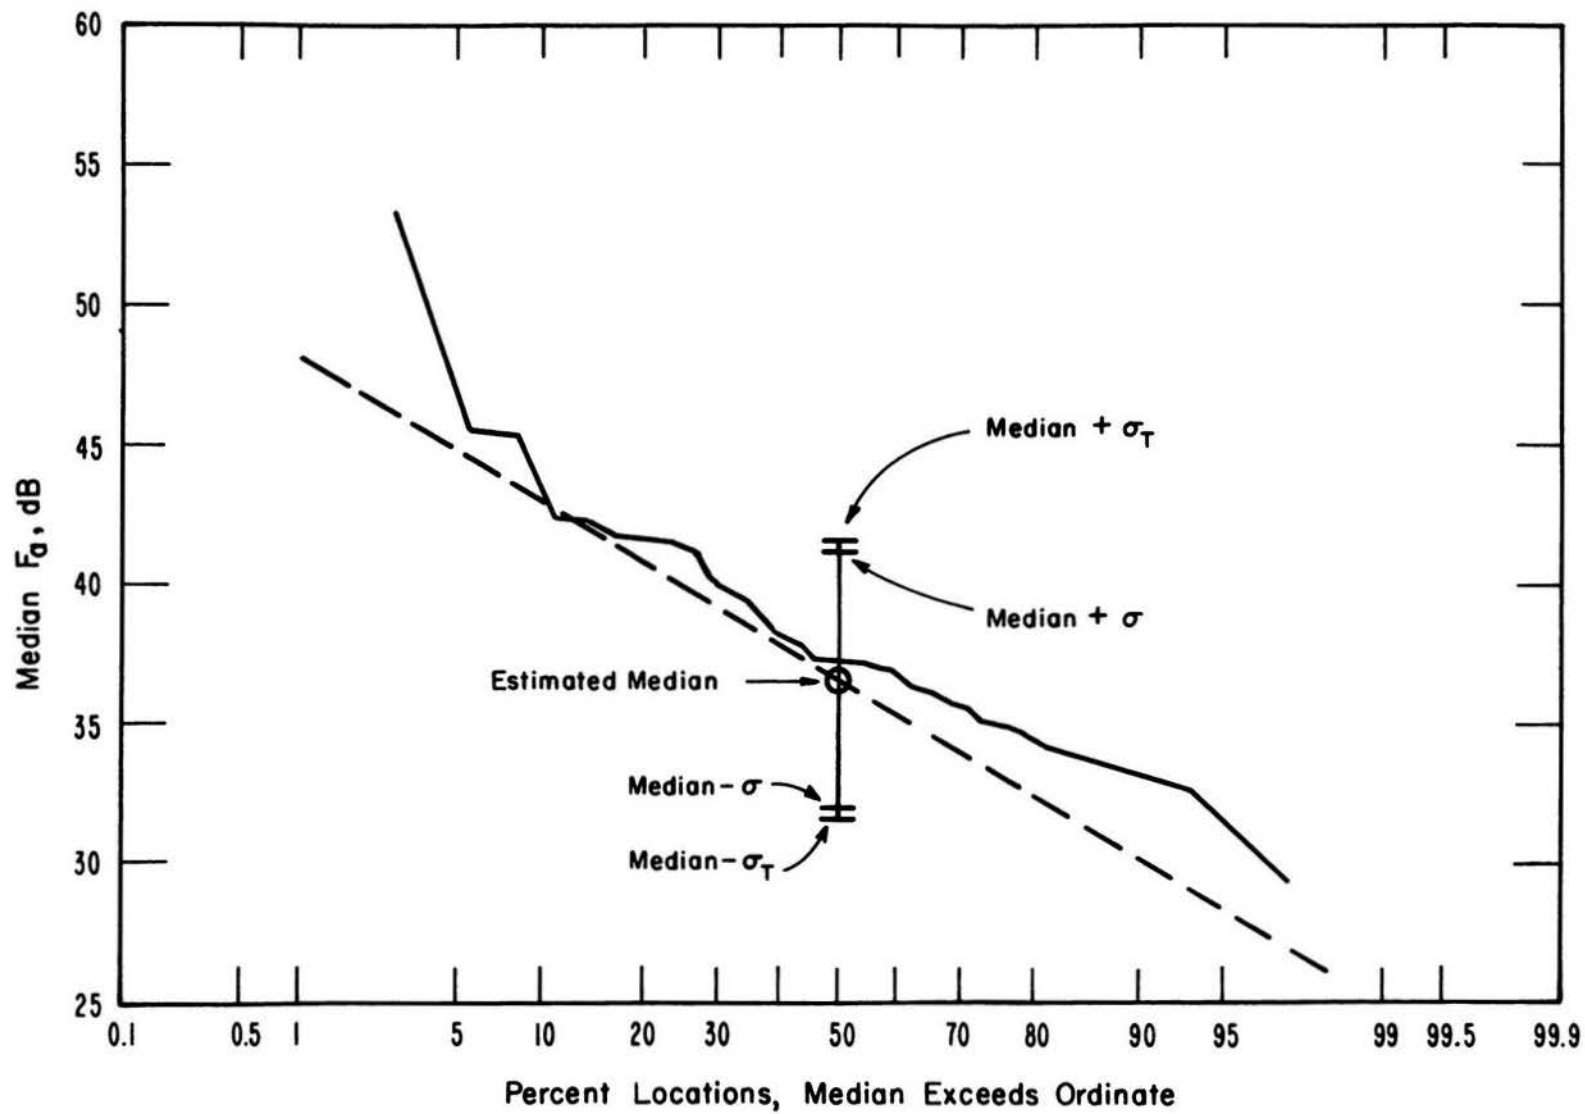


Figure 2. Distribution of location median values of man-made noise, 20 MHz residential area data.

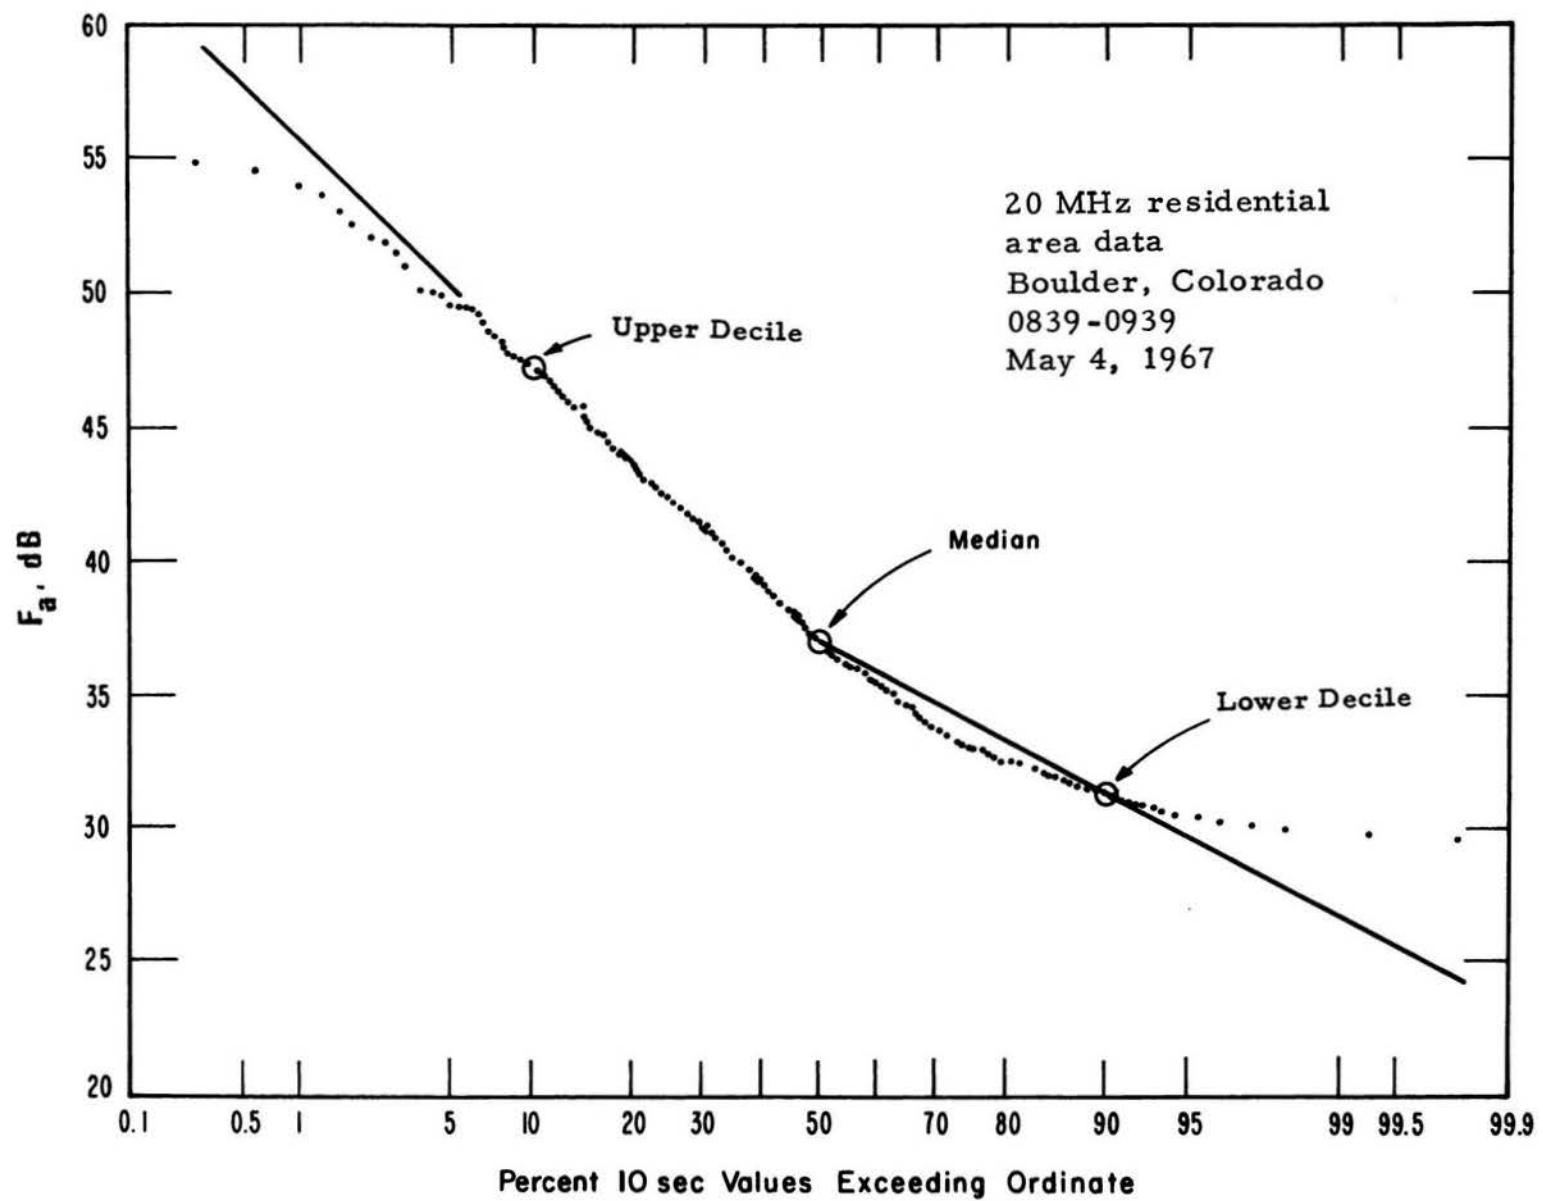


Figure 3. Distribution of F_a values for a given location.

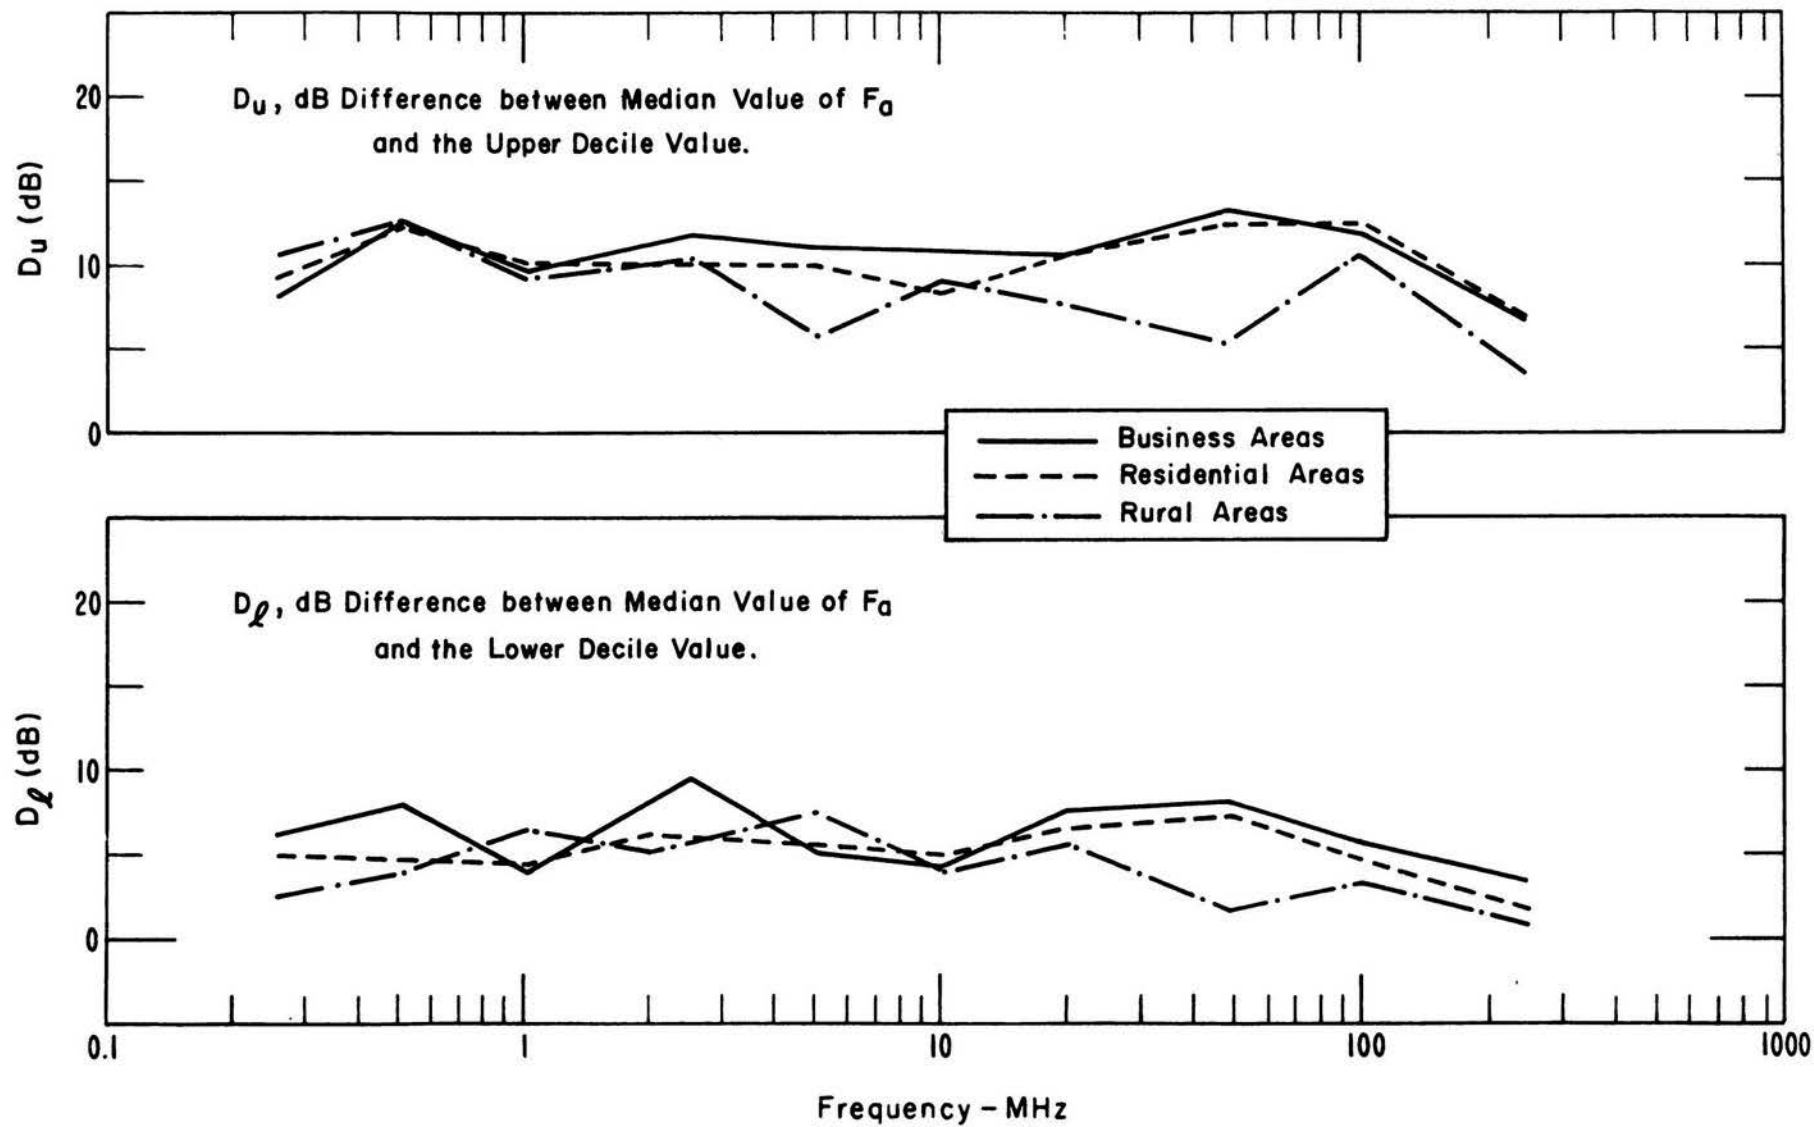


Figure 4. Expected variation of man-made radio noise levels at a location within an hour.

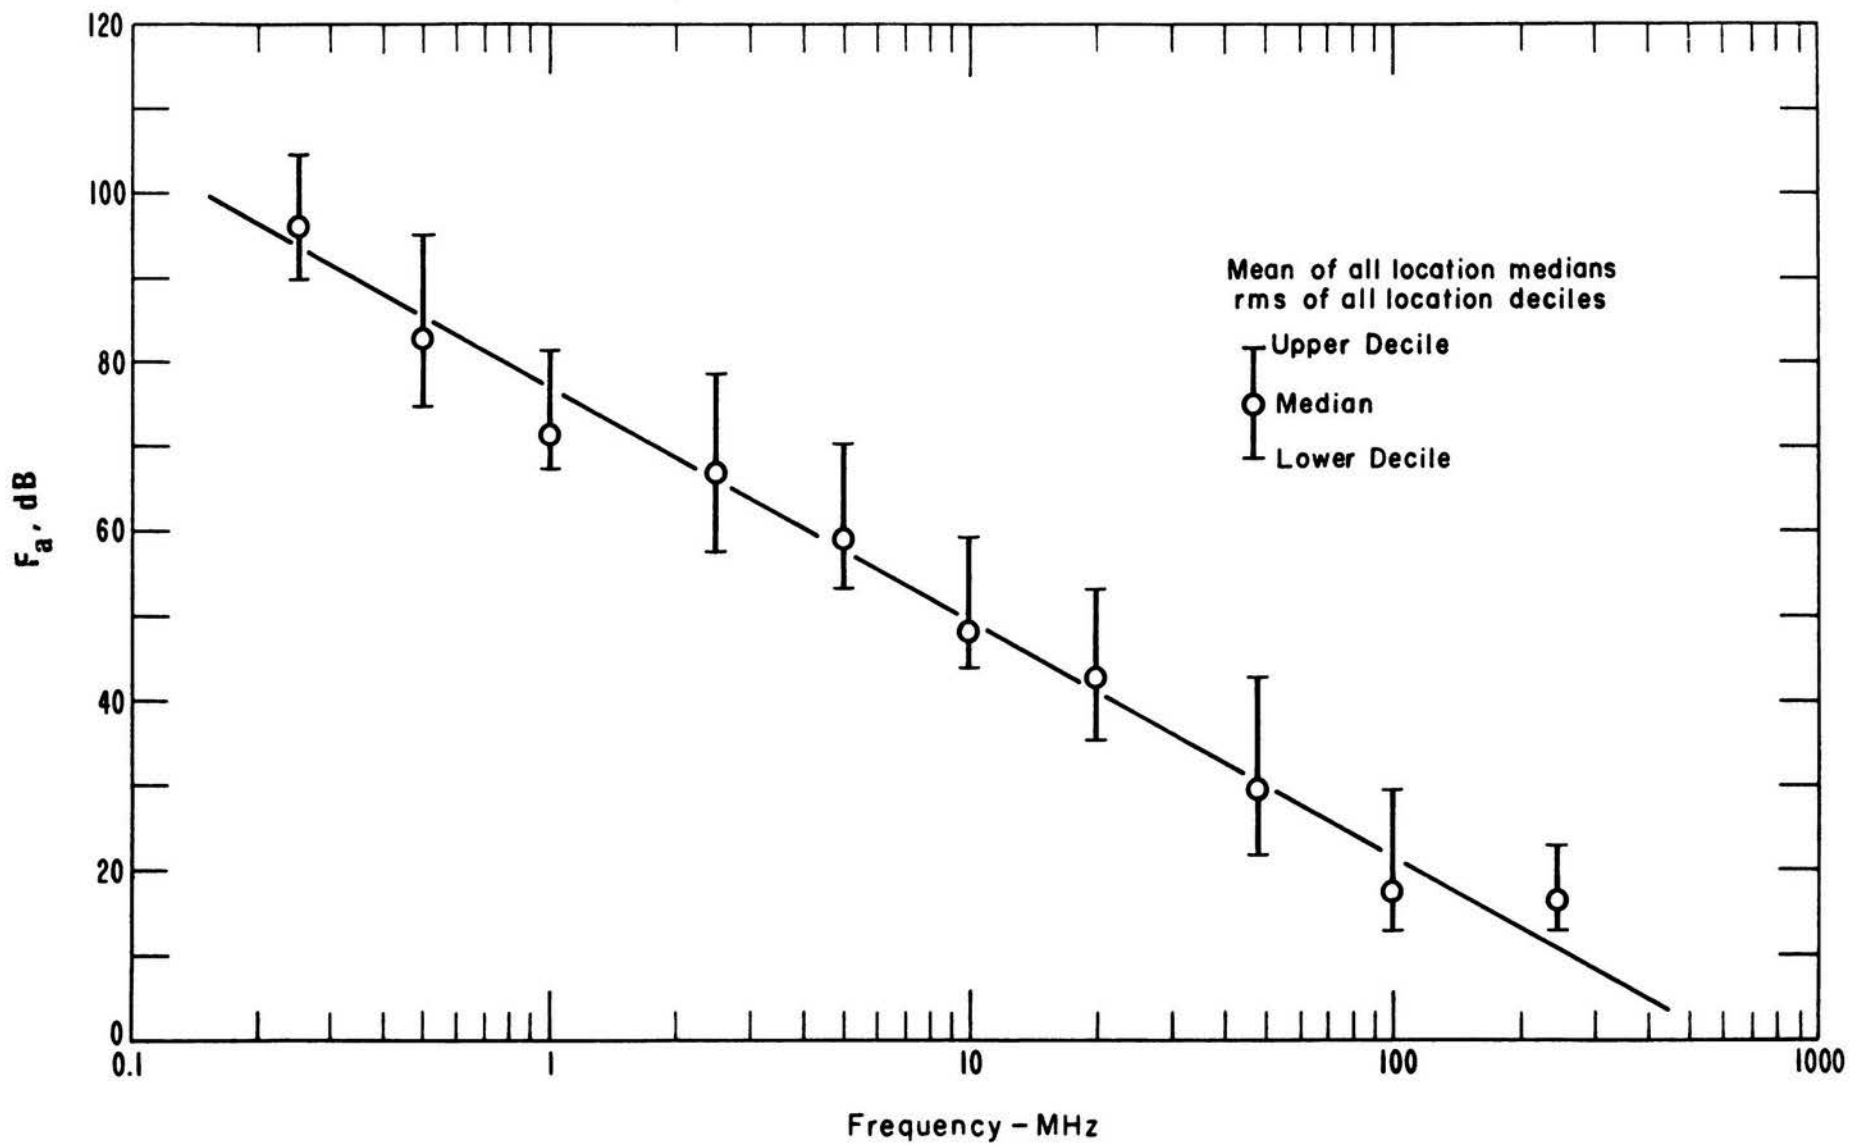


Figure 5. Estimates of man-made noise levels and their variation within an hour for business areas.

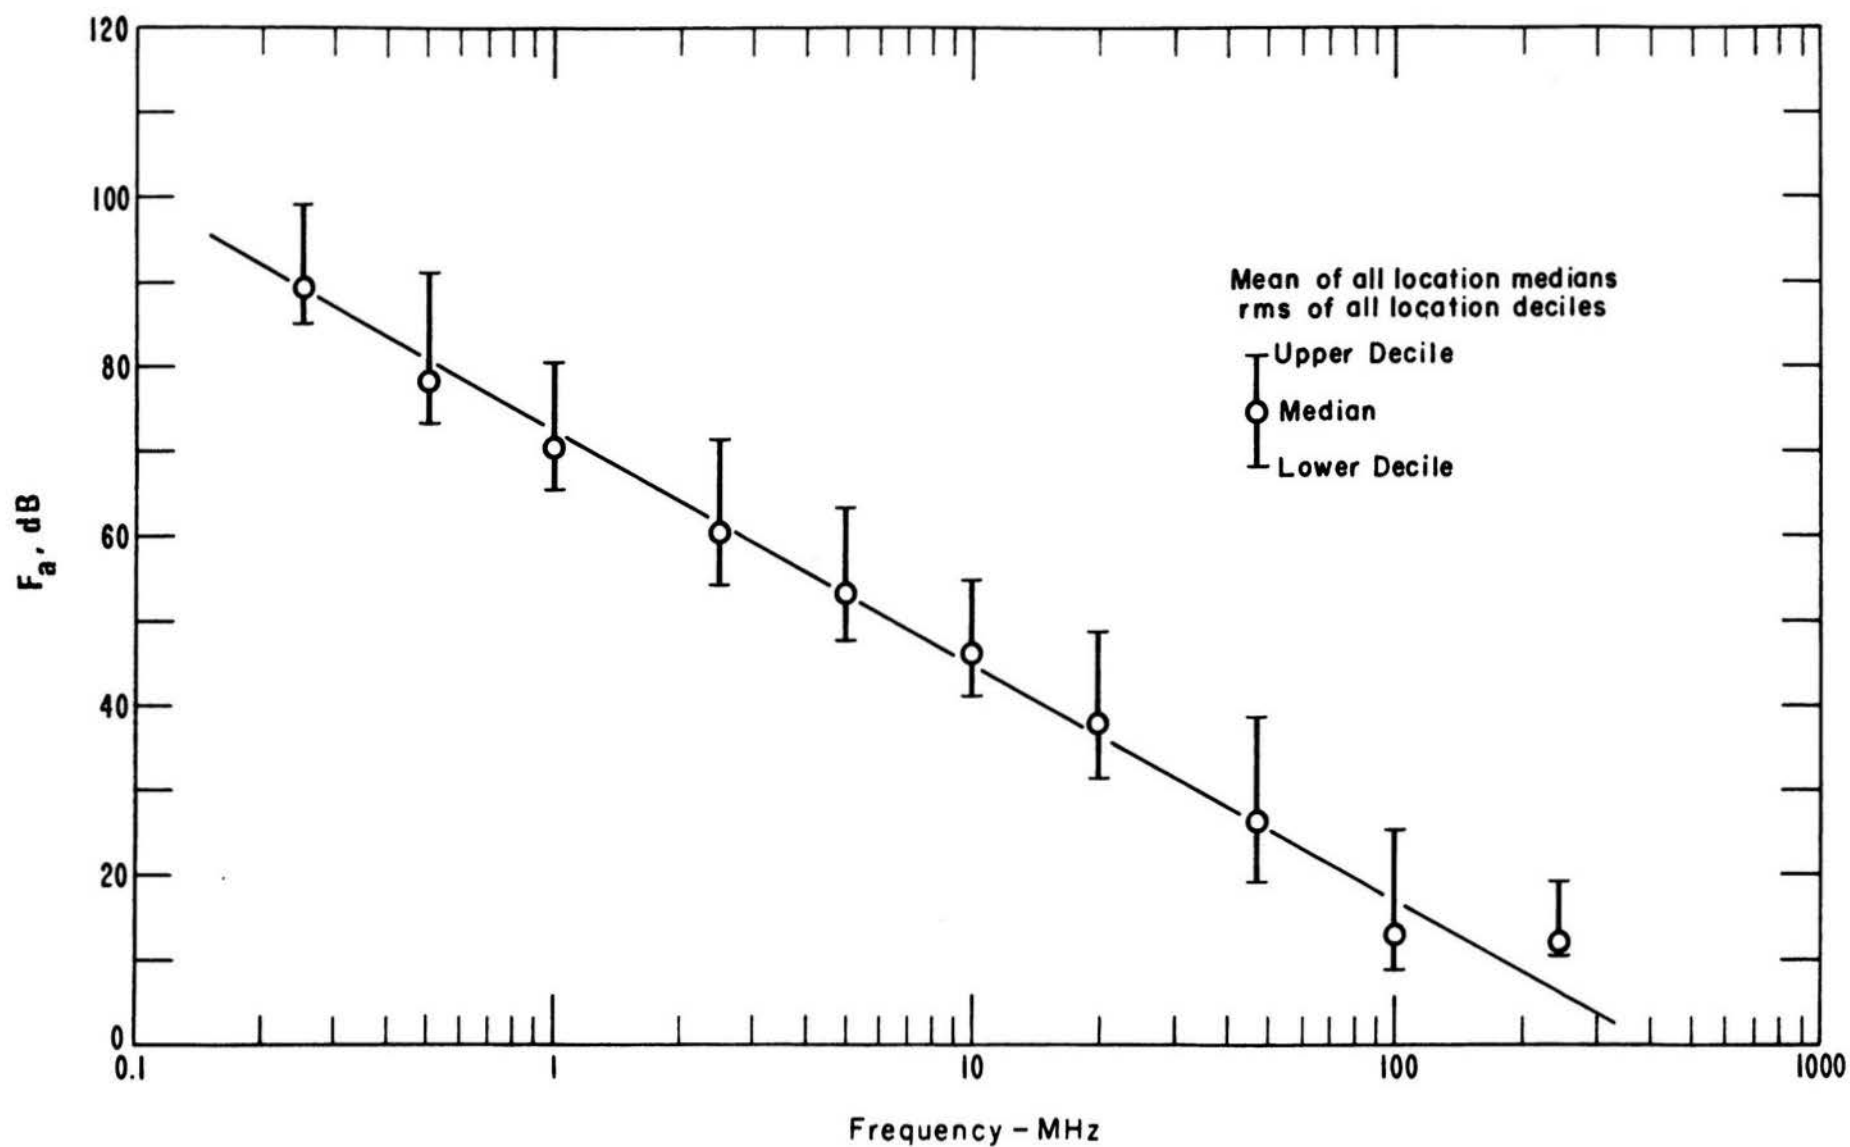


Figure 6. Estimates of man-made noise levels and their variation within an hour for residential areas.

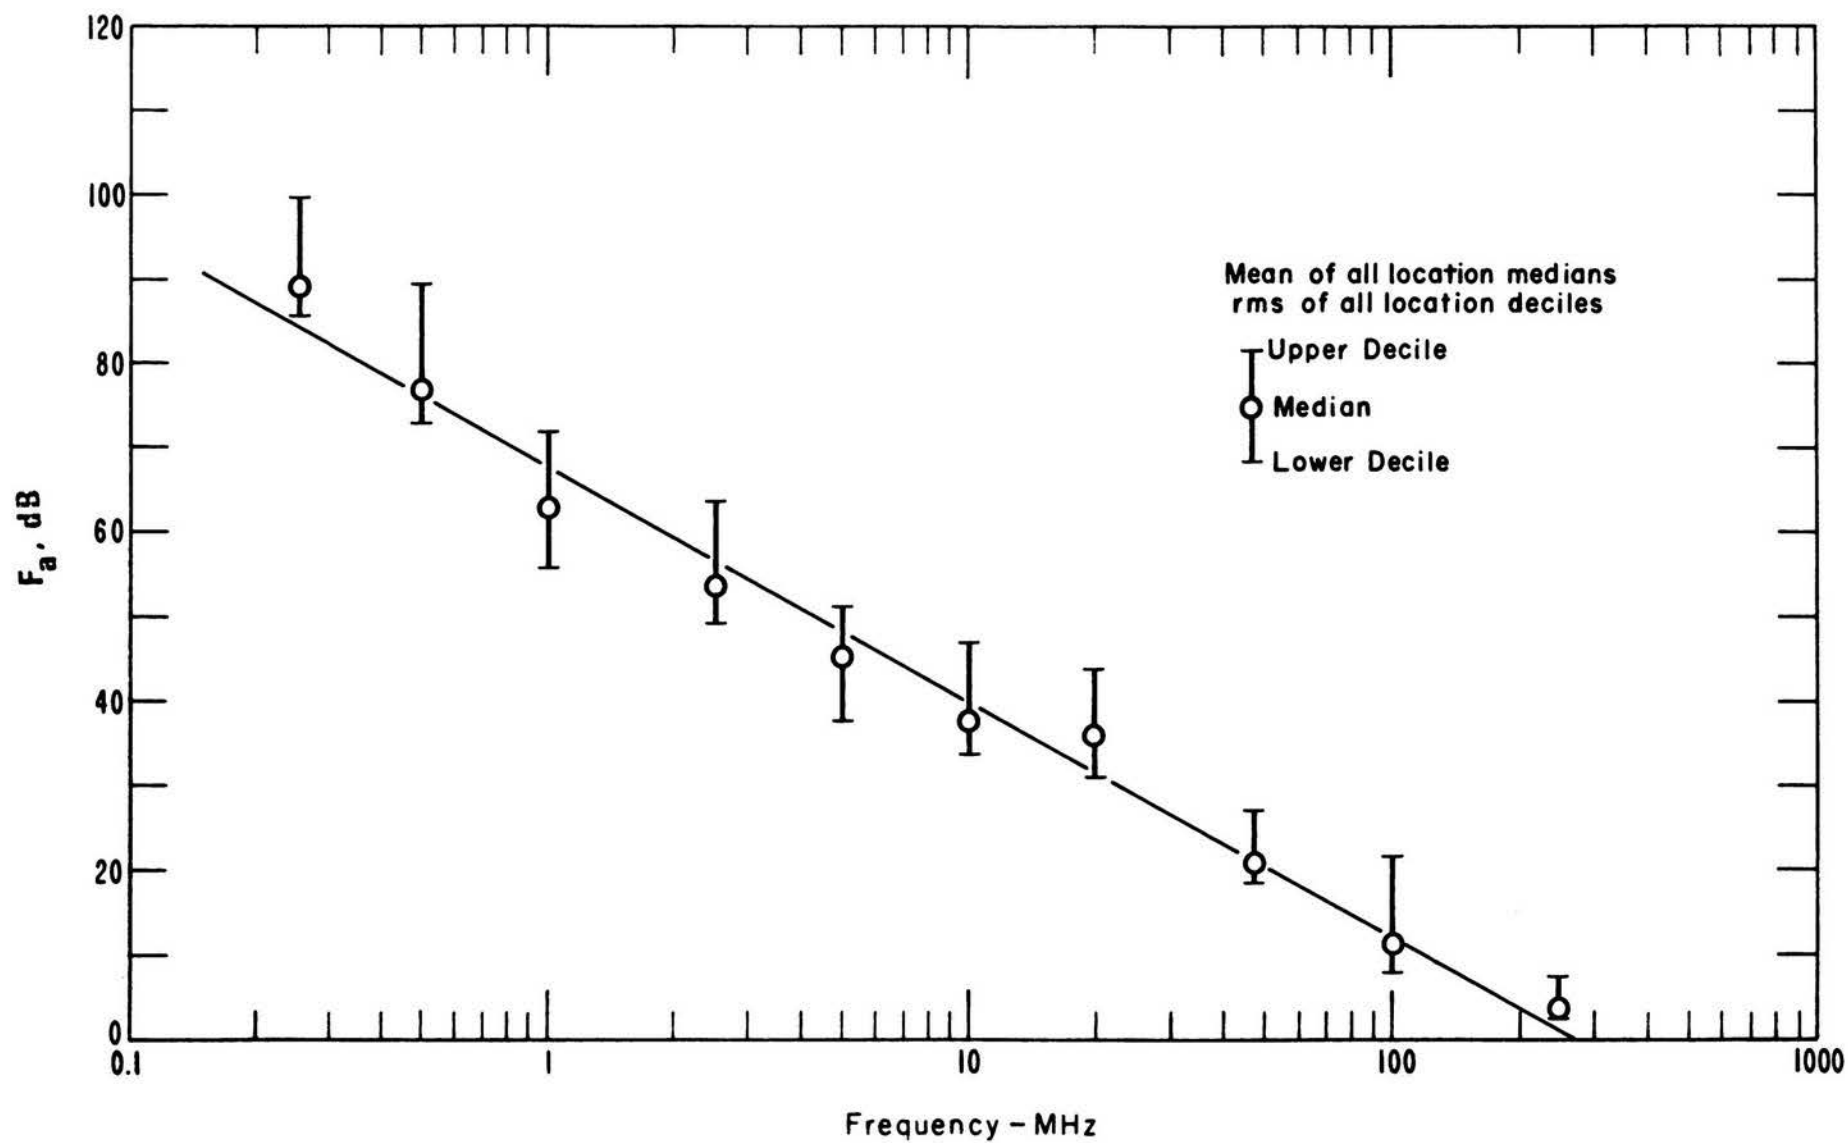


Figure 7. Estimates of man-made noise levels and their variation within an hour for rural areas.

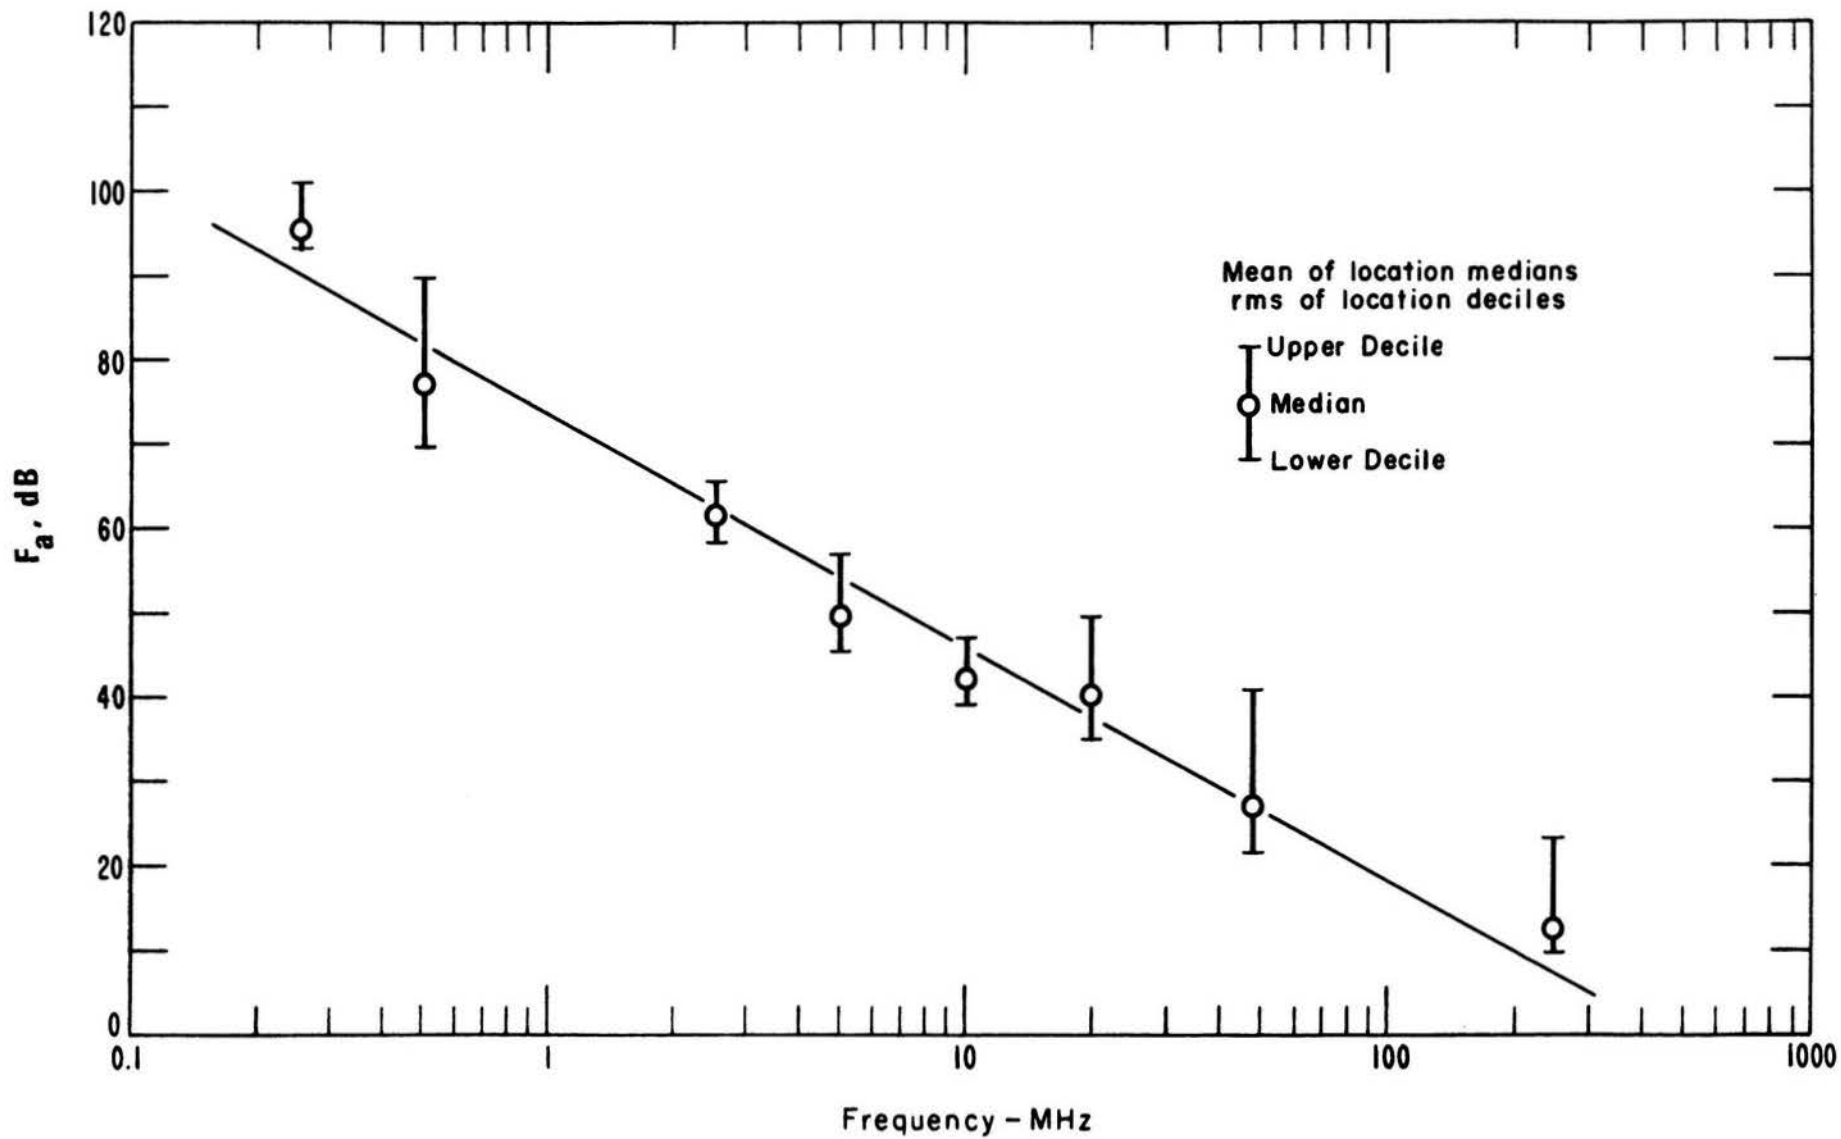


Figure 8. Estimates of man-made noise levels and their variation within an hour for interstate highways.

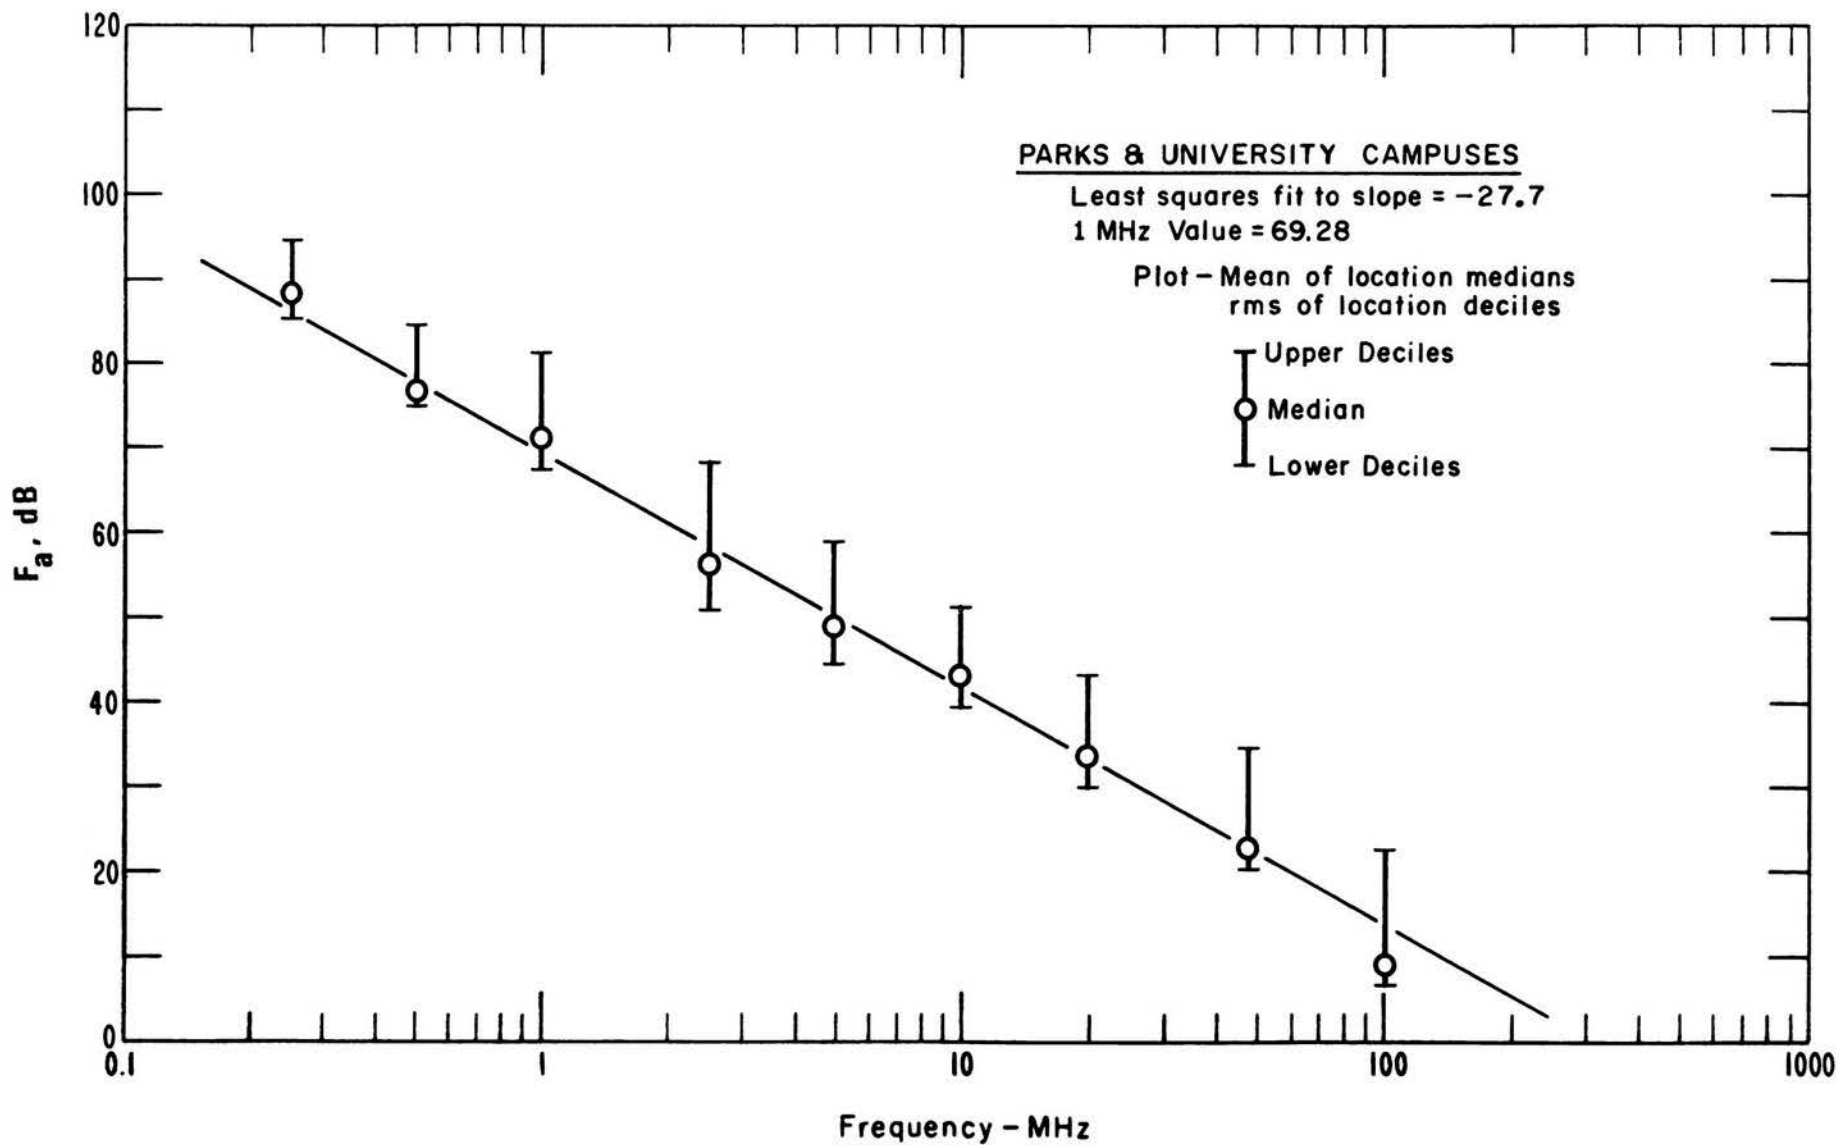


Figure 9. Estimates of man-made noise levels and their variation within an hour for parks and university campuses.

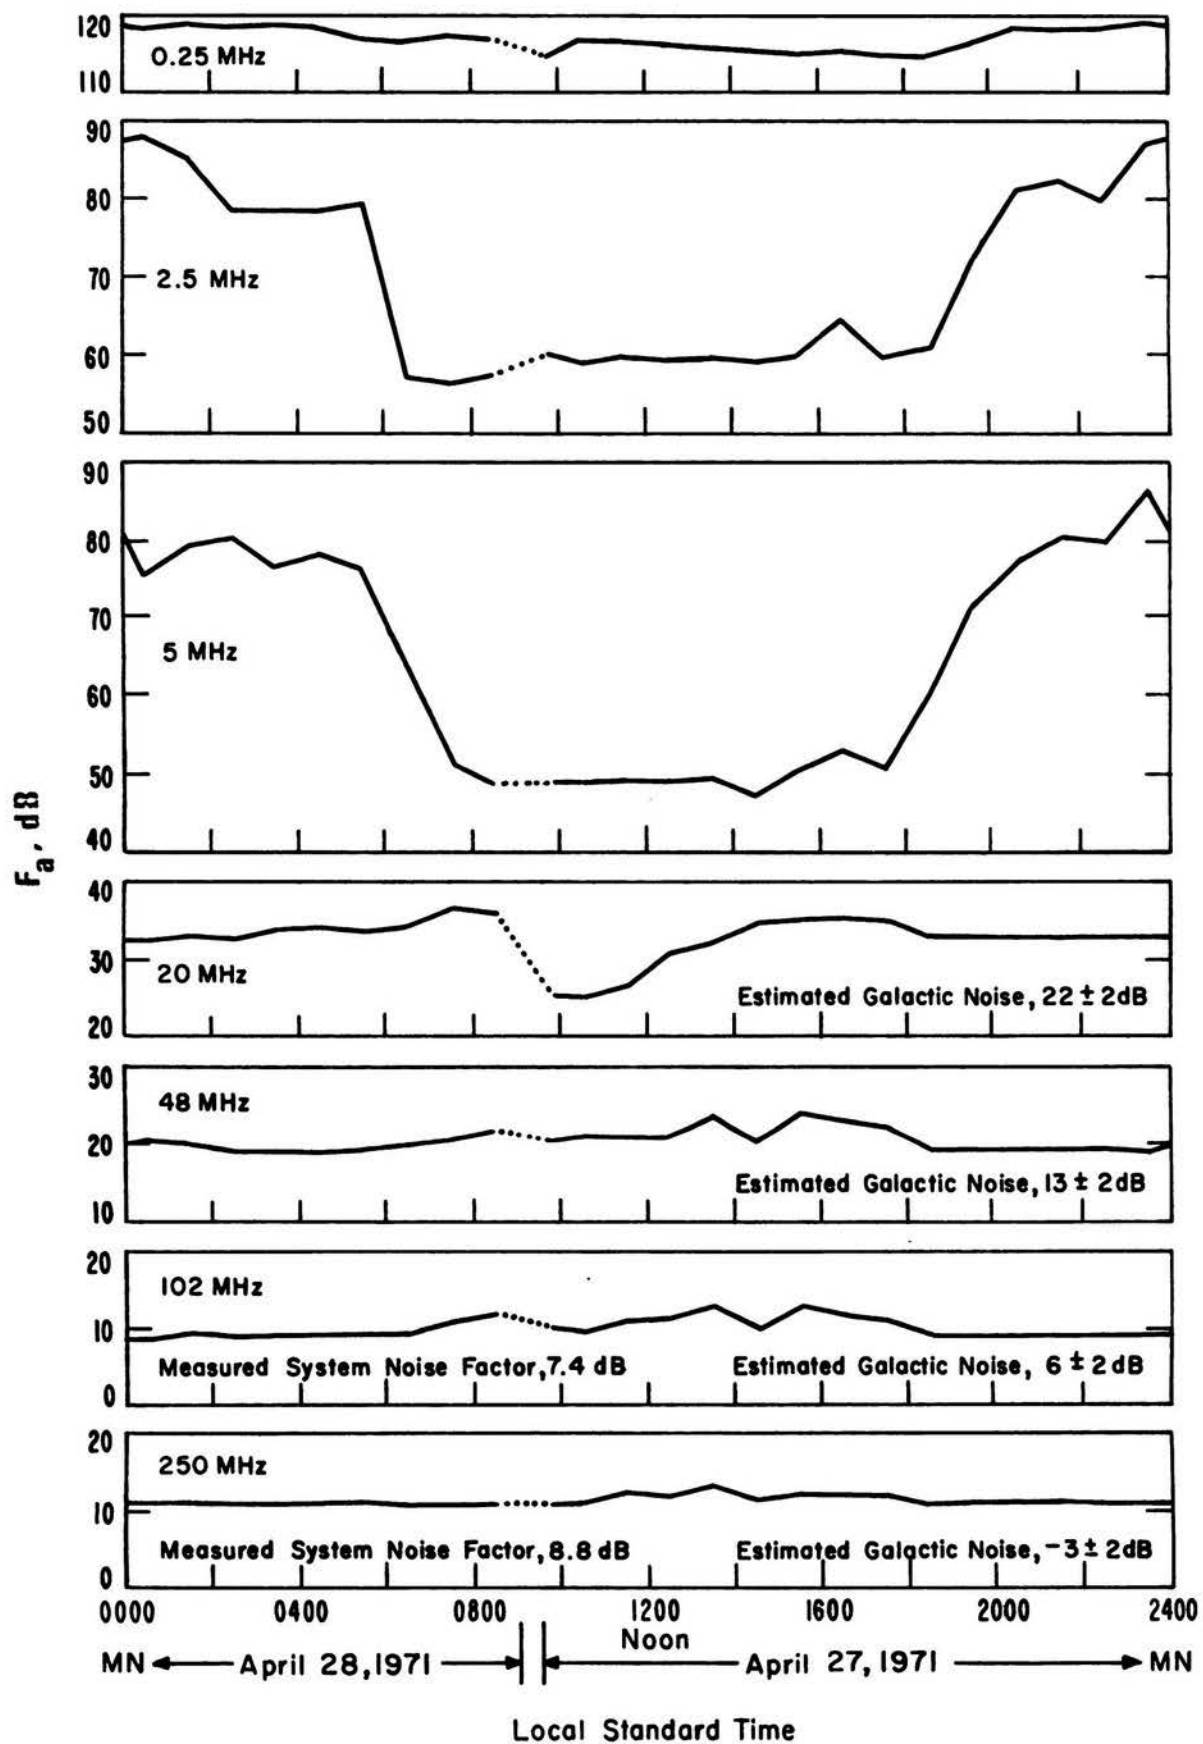


Figure 10. Radio-noise measurements, Dept. of Commerce Boulder Labs, end of Wing 1.

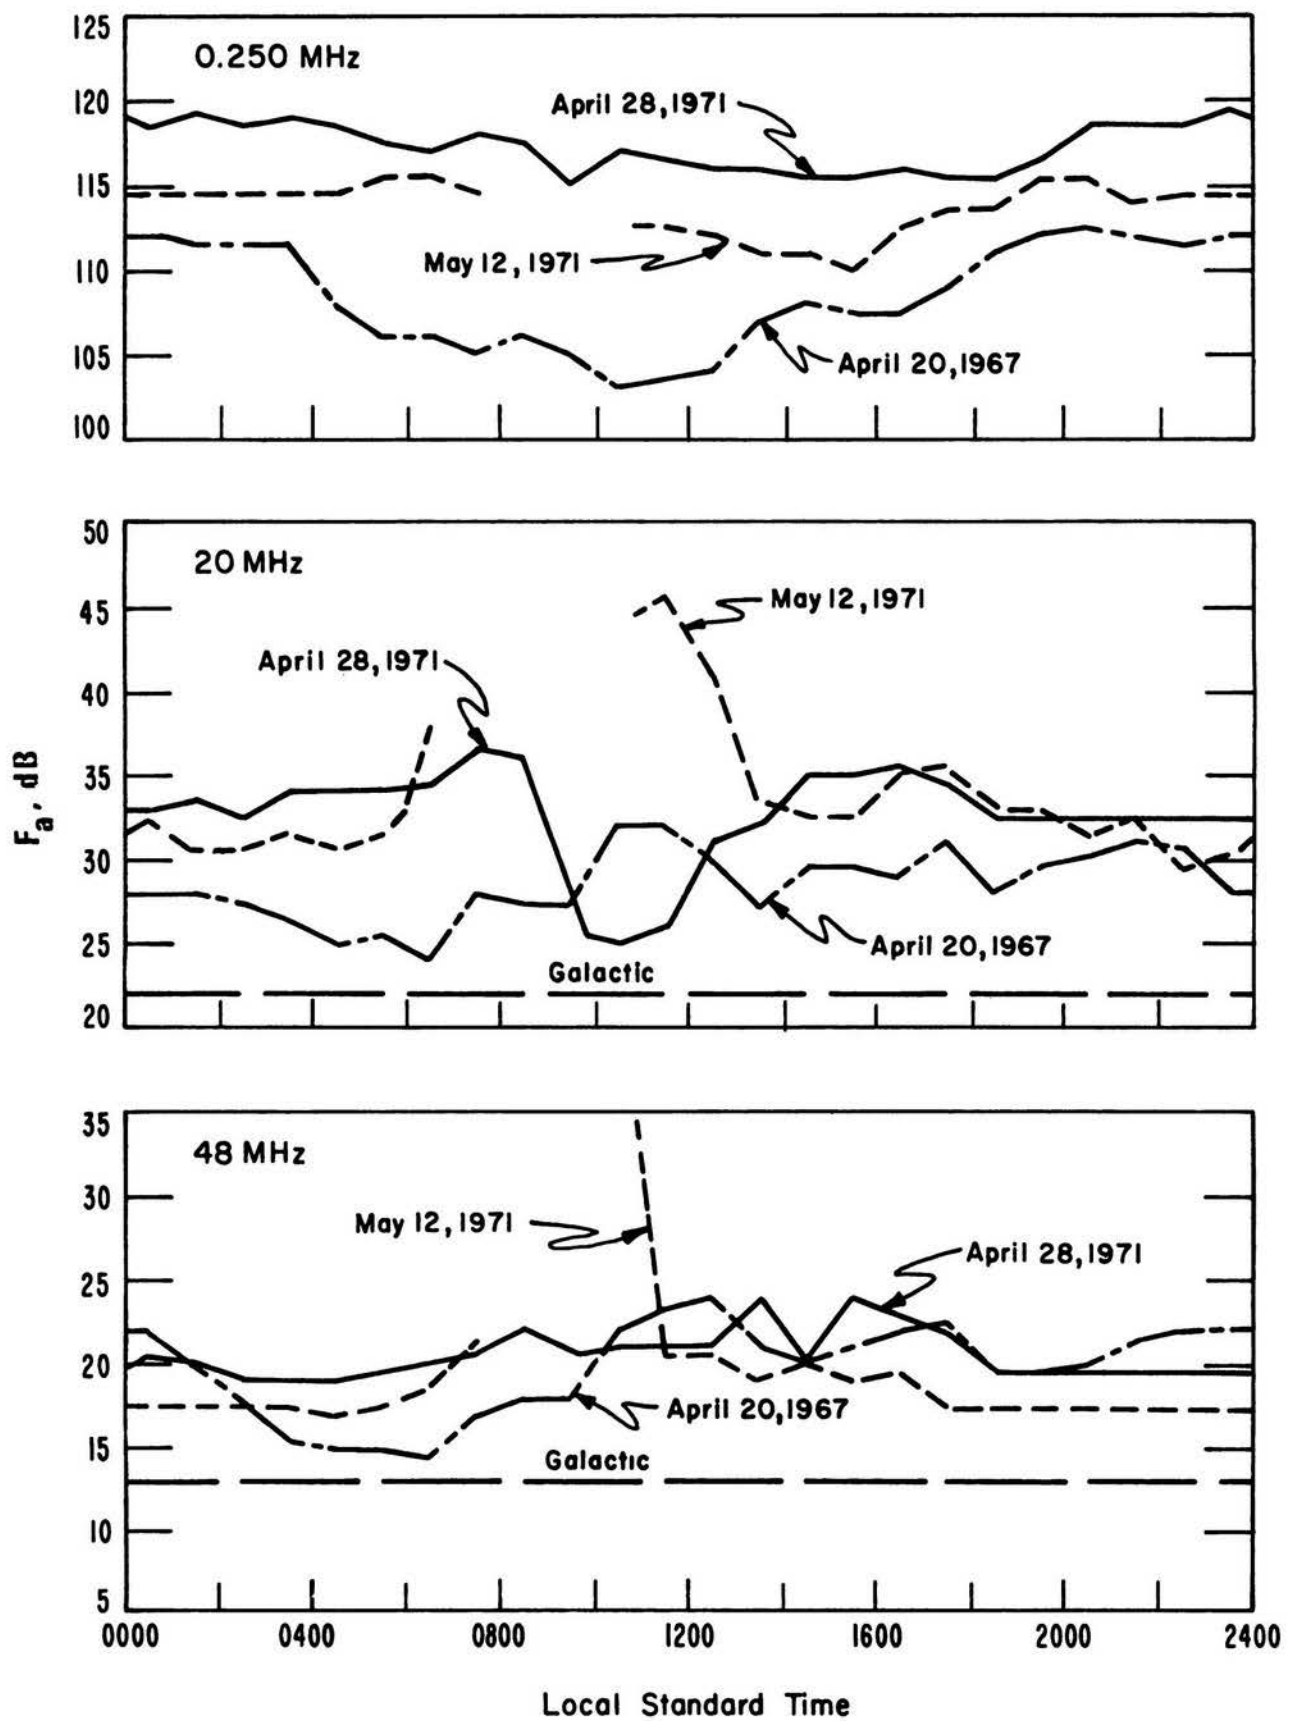


Figure 11. Radio-noise measurements, Dept. of Commerce Boulder Labs, end of Wing 1.

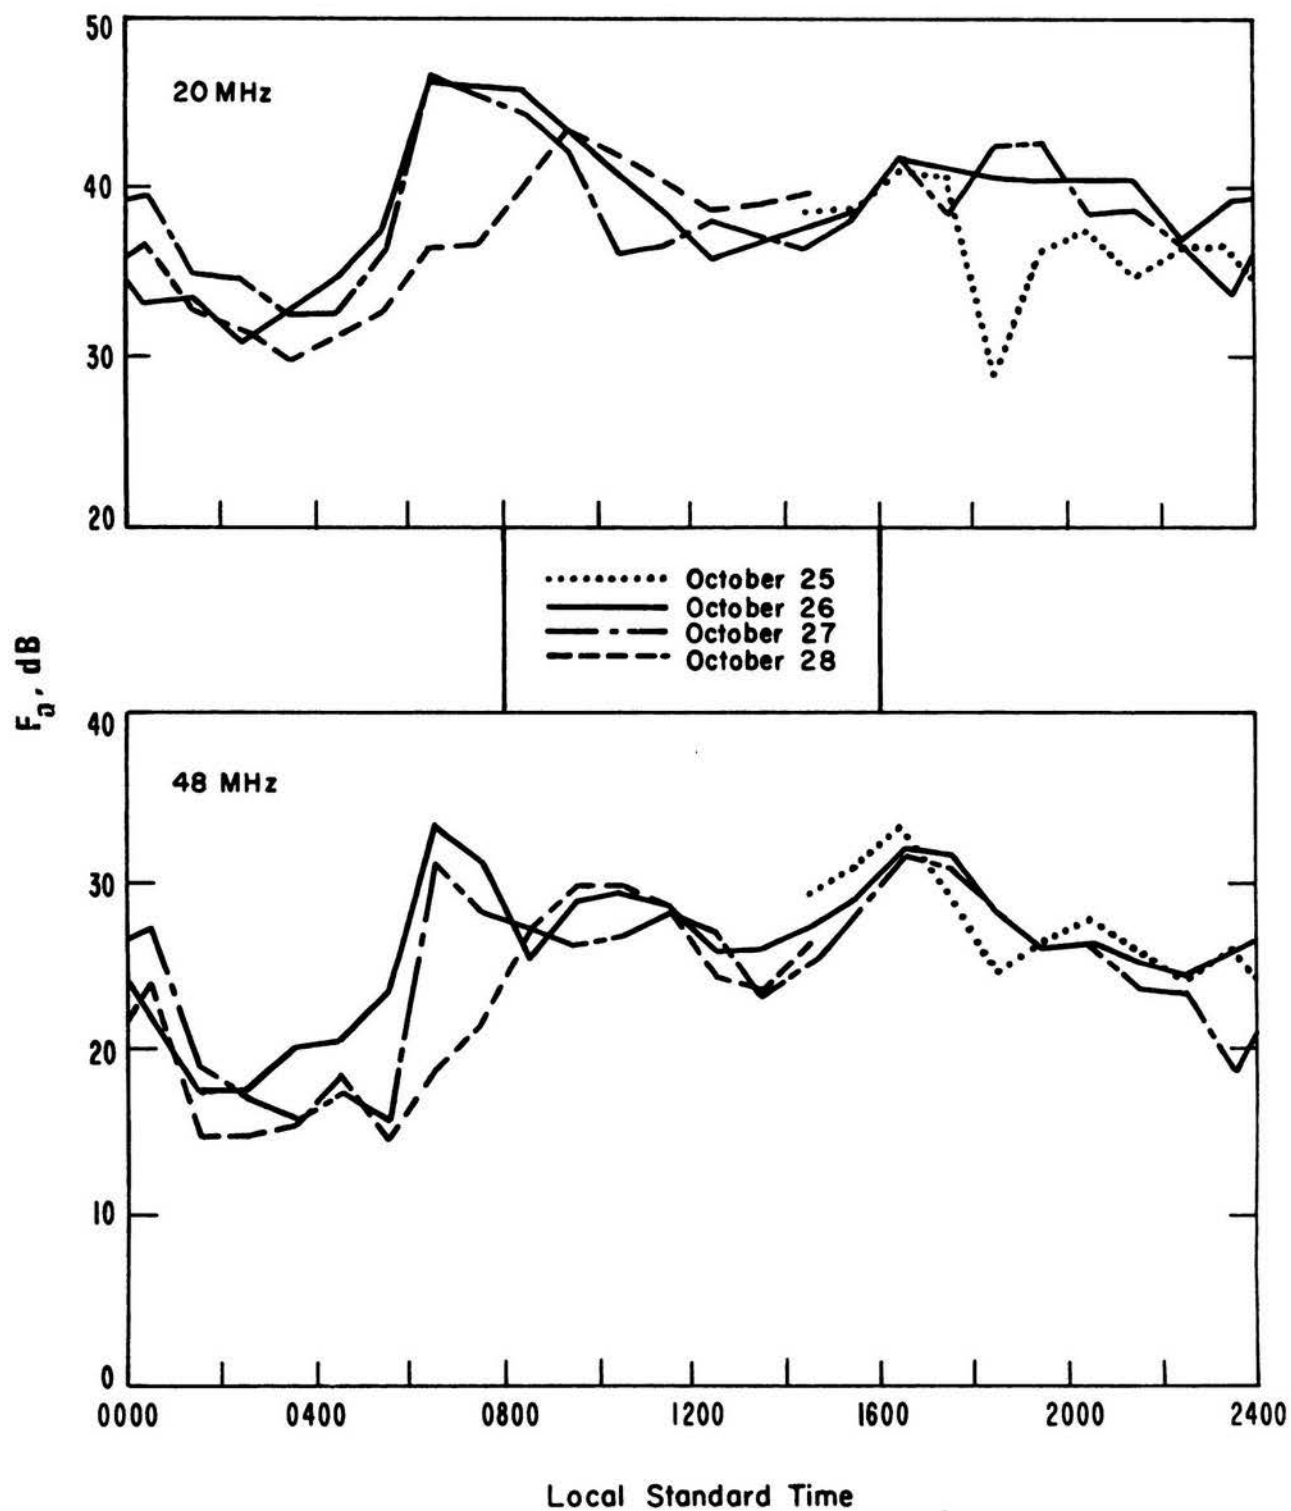


Figure 12. Hourly median values of radio noise, measured near highway in front of Dept. of Commerce Boulder Labs., October 25-28, 1967.

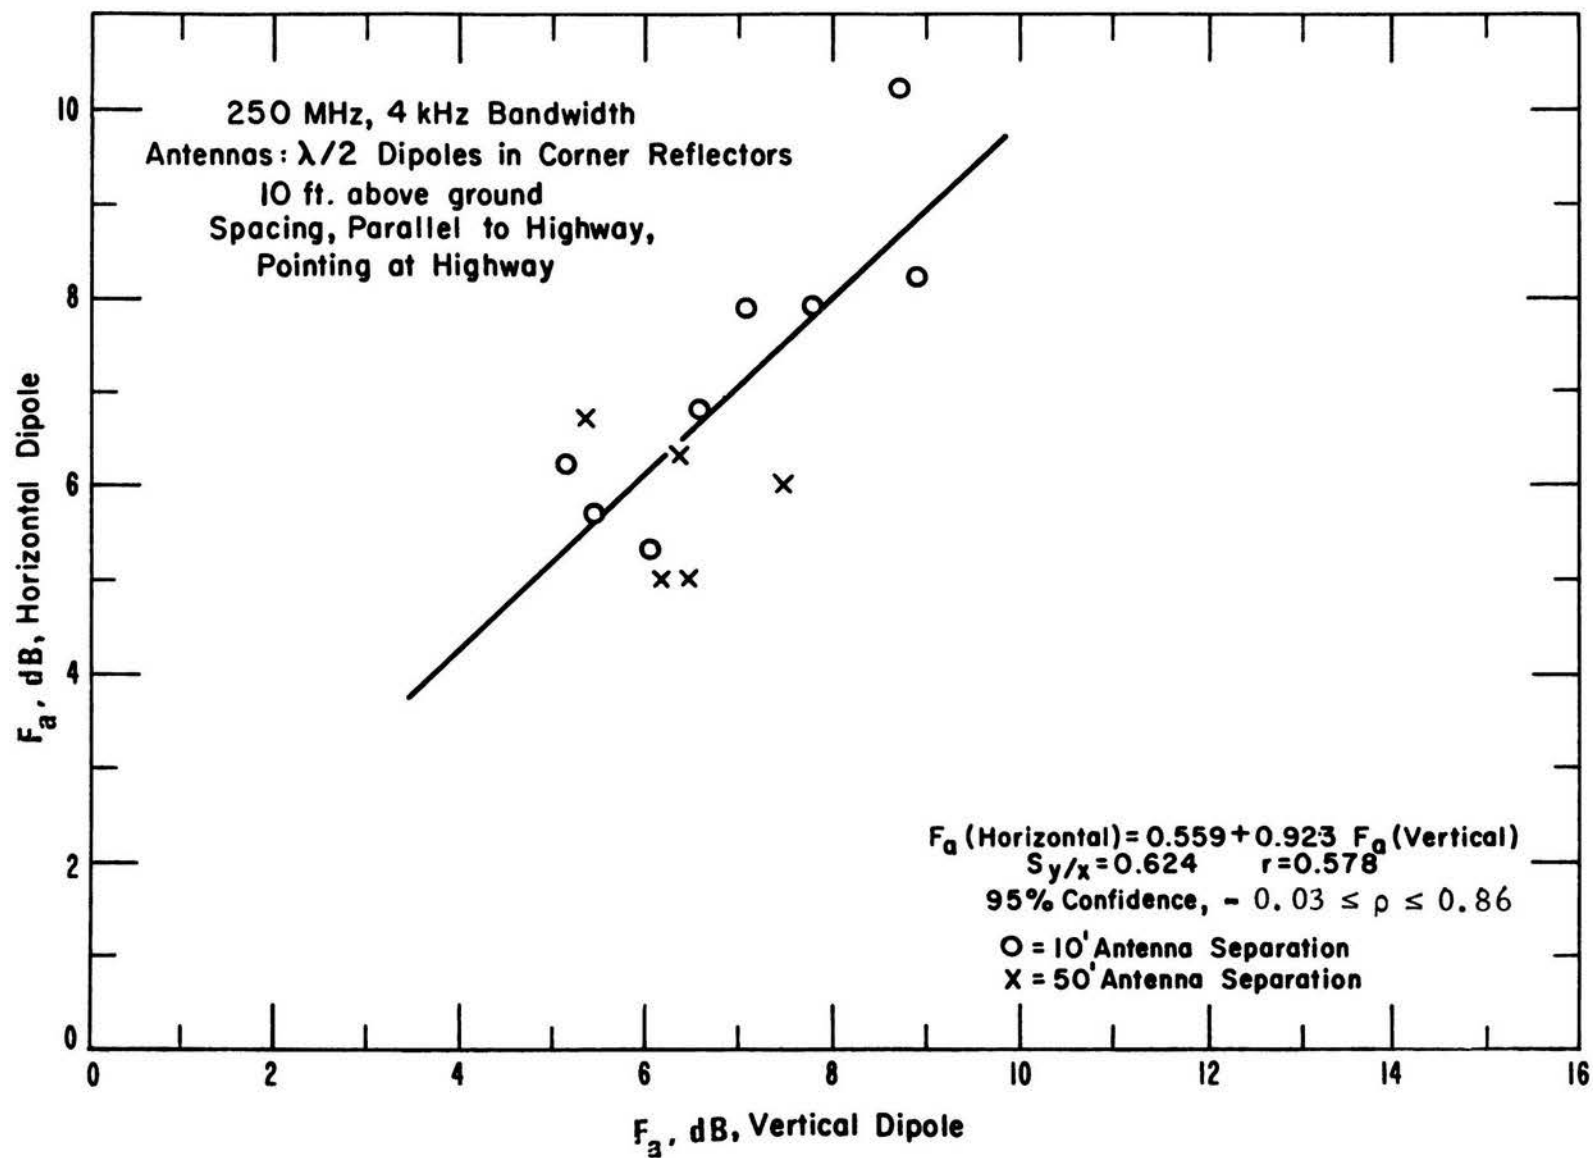


Figure 13. Horizontal versus vertical component of man-made radio noise at 250 MHz.

4.1.2 Power Lines

A number of local features may influence greatly the man-made radio noise level at a given location. One such feature is the proximity of electric power distribution lines. At and below the middle of the HF band, a large part of the received noise is generated by or propagated along power lines. Even in the VHF and UHF bands, however, nearby power lines, especially high voltage lines, can be the source of the predominant man-made radio noise. The mobile radio noise laboratory has been used to measure the decrease in power line noise as a function of distance from the power line. Figures 14 and 15 show examples of such measurements for two power transmission lines. These measurements were made starting directly under the power line and moving perpendicular to the power line until the noise decreased to the ambient level in the area. One set of measurements was made for a 250 kV line located in a rural area of the state of Washington. The 0.5 MHz measurements are shown on figure 14. Another set of measurements was made for a 115 kV line in a rural area in the state of Wyoming. The results of the 102 MHz measurements are shown on figure 15. Both sets of measurements were made using short vertical whip antennas. The physical height of the 0.5 MHz antenna is 0.003λ , and the height of the 102 MHz antenna is 0.17λ . When under the power line, the lowest conductor was approximately 15 ft above the top of the antenna. Because of the antennas used, the fall off of the noise with decreasing distance near the line is almost certain to be due to the antenna pattern rather than a decrease in the actual field. A comparison with figure 1 indicates that, for an average location, the power line noise from a 250 kV line at 0.5 MHz would be equal to the expected ambient noise level at distances of approximately 290 m in business areas, 320 m in residential areas, and 350 m in rural areas. Also, the

expected ambient noise at 102 MHz and the 115 kV power line noise would be equal at approximately 130 m in a business area, 180 m in a residential area, and 240m in a rural area. These probably are good "rule-of-thumb" distances to use in estimating the effect of nearby power lines.

Figure 16 shows the results of measurements taken along a 115 kV line in rural Wyoming, parallel to the line, under the line, and 400 m from it. The figure shows the results for eight measurement frequencies, the values for each frequency being the median value of values taken along approximately 1 mile of the transmission line. Also shown on figure 16 is the general rural noise characteristic from figure 1. The 115 kV line of figures 14 and 15 had steel towers whereas the 115 kV line of figure 16 was similar but used wooden towers.

The above types of measurements were made for five H-frame, 115 kV power transmission lines in the Boulder area, each line being measured at more than one location. Figure 17 summarizes these measurements, giving the decrease in noise power as a function of the perpendicular distance from the lines. Results are shown for seven measurement frequencies, 0.25 MHz to 250 MHz. The results shown give the expected values, based on the mean values of the measurements of the five lines. The results of figure 1 indicate that F_a decreases with increasing frequency at about 27.7 dB per decade of frequency. The mean value of all the measurements taken under the five H frame, 115 kV lines, and at a distance of 16 meters from the lines are shown on figure 18 along with a least squares fit to the measurements, with the slope restricted to 27.7 dB per decade. Also shown on figure 18 is the standard deviation, σ_{F_a} , for these measurements. The ITS data base does not contain any information on the effect of higher voltage power lines. However, in a recent report (Crippen, 1971), measurements on a 500 kV line indicated that, in

the HF region, the effects of the power line could be noticed in a rural area out to a distance of 400 m.

The noise from power lines will vary over wide limits depending on the condition of the line and insulators, type of supports, etc. Variation also will be noted with weather changes. For example, during periods of precipitation, raindrops or snowflakes hitting the line can cause a corona discharge to take place. The highest noise levels probably will be noted at the beginning of a rainstorm after a dry, windy period when the insulators have become covered with dust. When the rain mixes with the dust and before sufficient rain has fallen to wash the insulators, very strong discharges across the insulators will take place. The line voltage appears to have less effect on the level of the radiated noise than the construction and condition of the line. The lower voltage distribution lines will often be noisier than the high voltage transmission lines. This could be due to a basic design philosophy, age and condition of the line, or a difference in line hardware design.

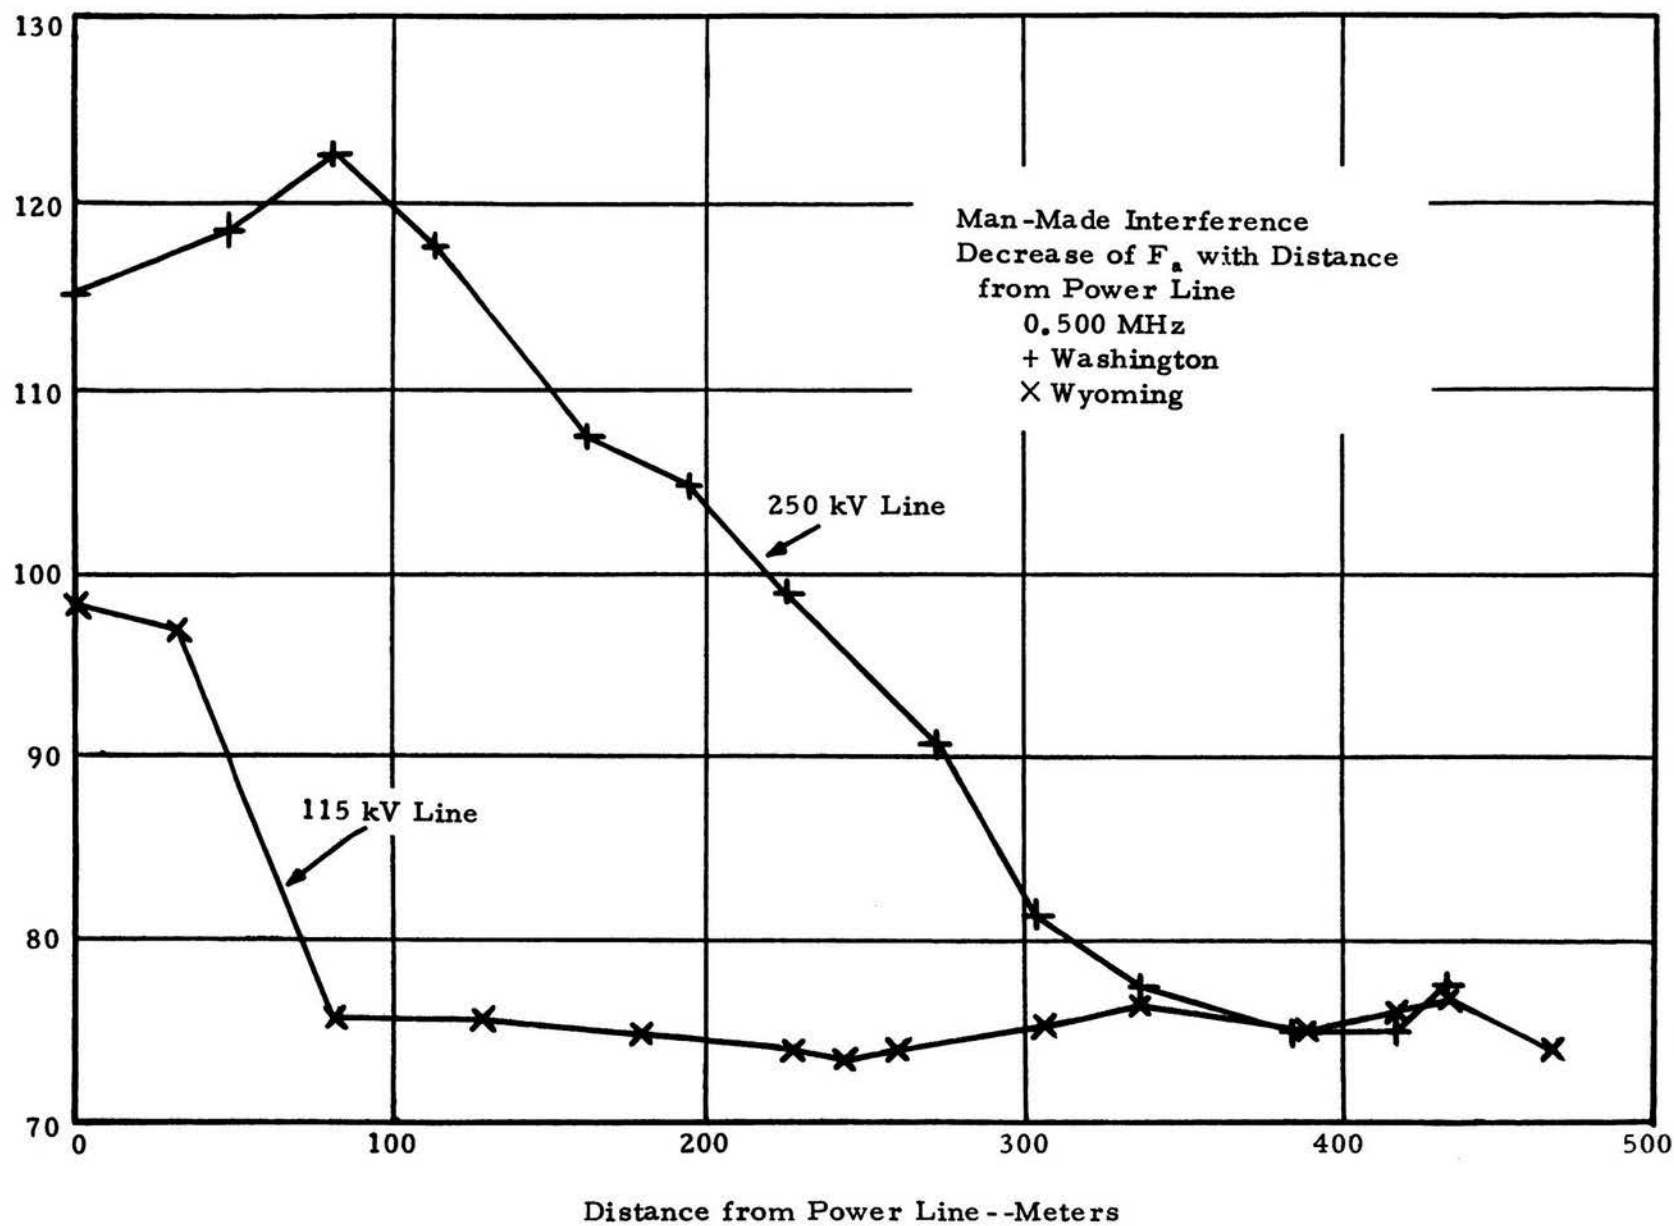


Figure 14. Decrease in power line noise with distance at 0.5 MHz.

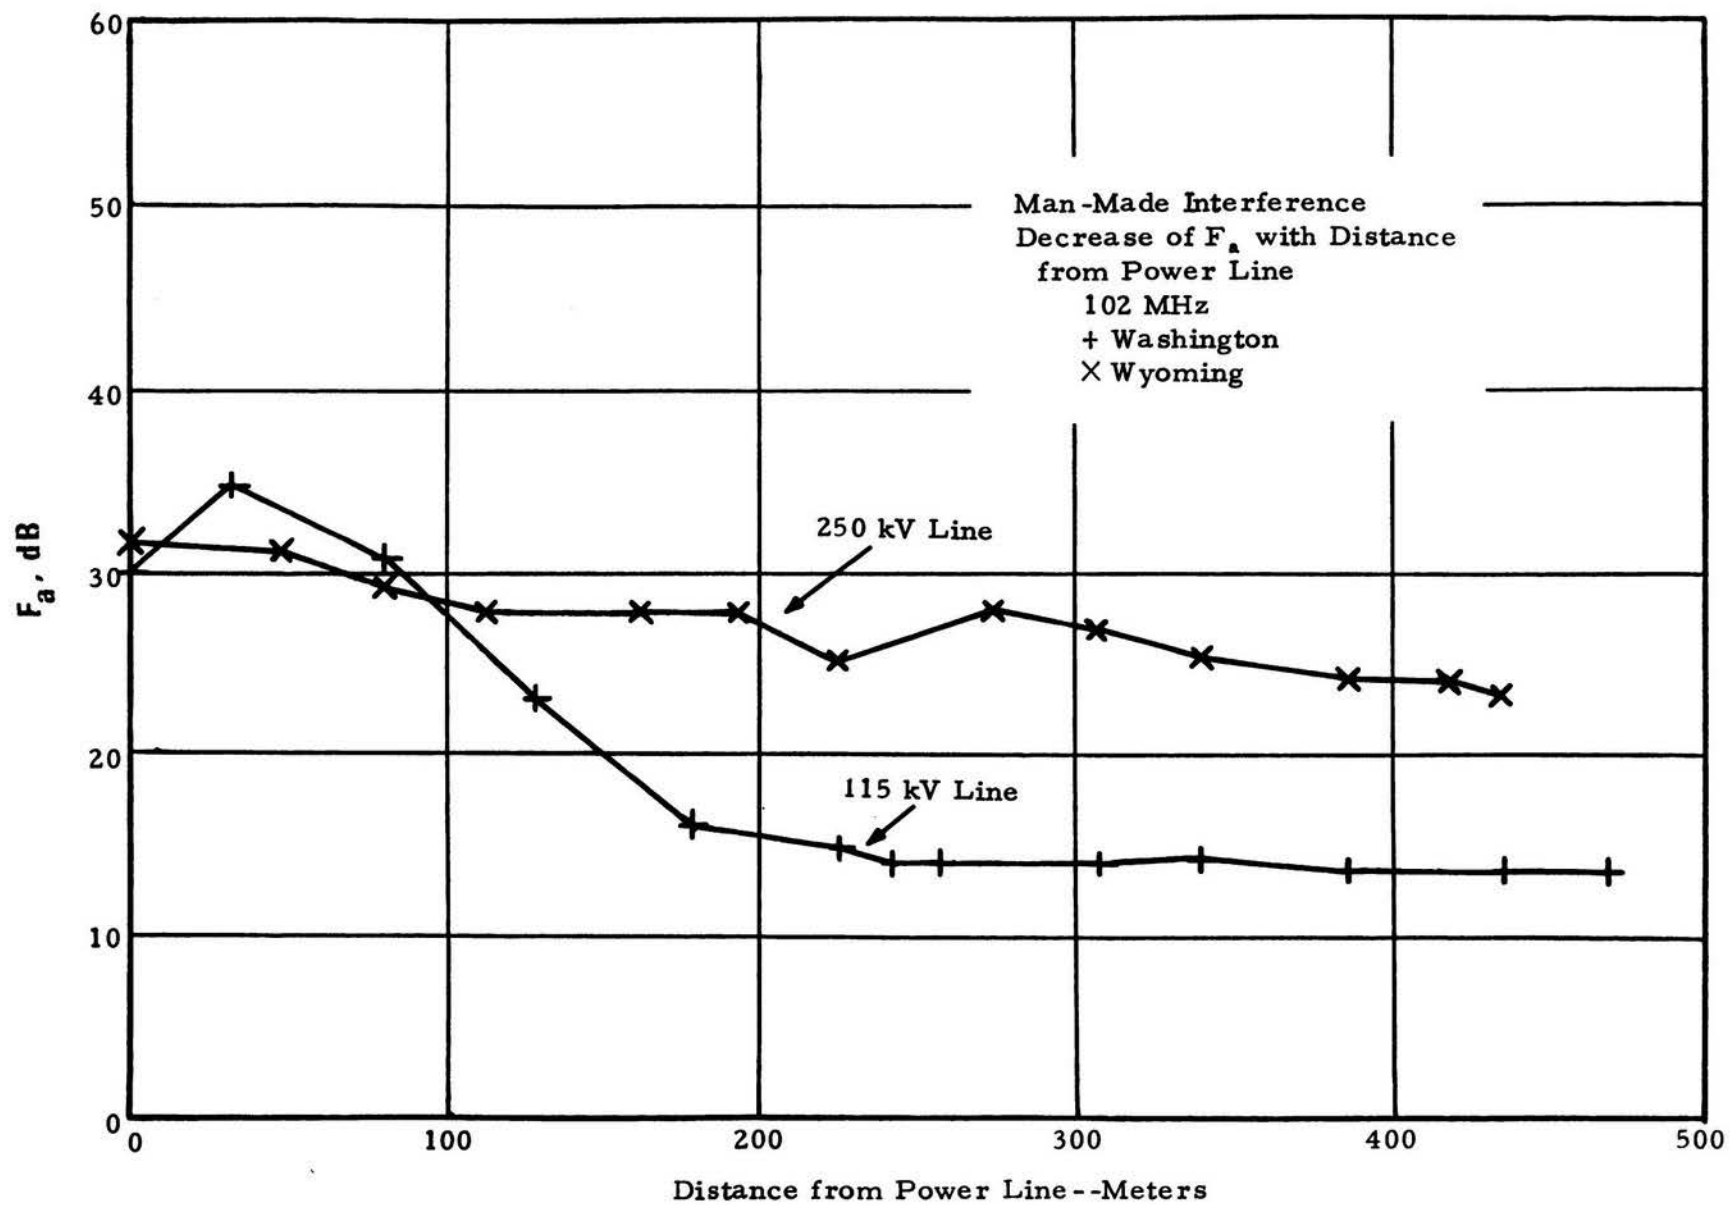


Figure 15. Decrease in power line noise with distance at 102 MHz.

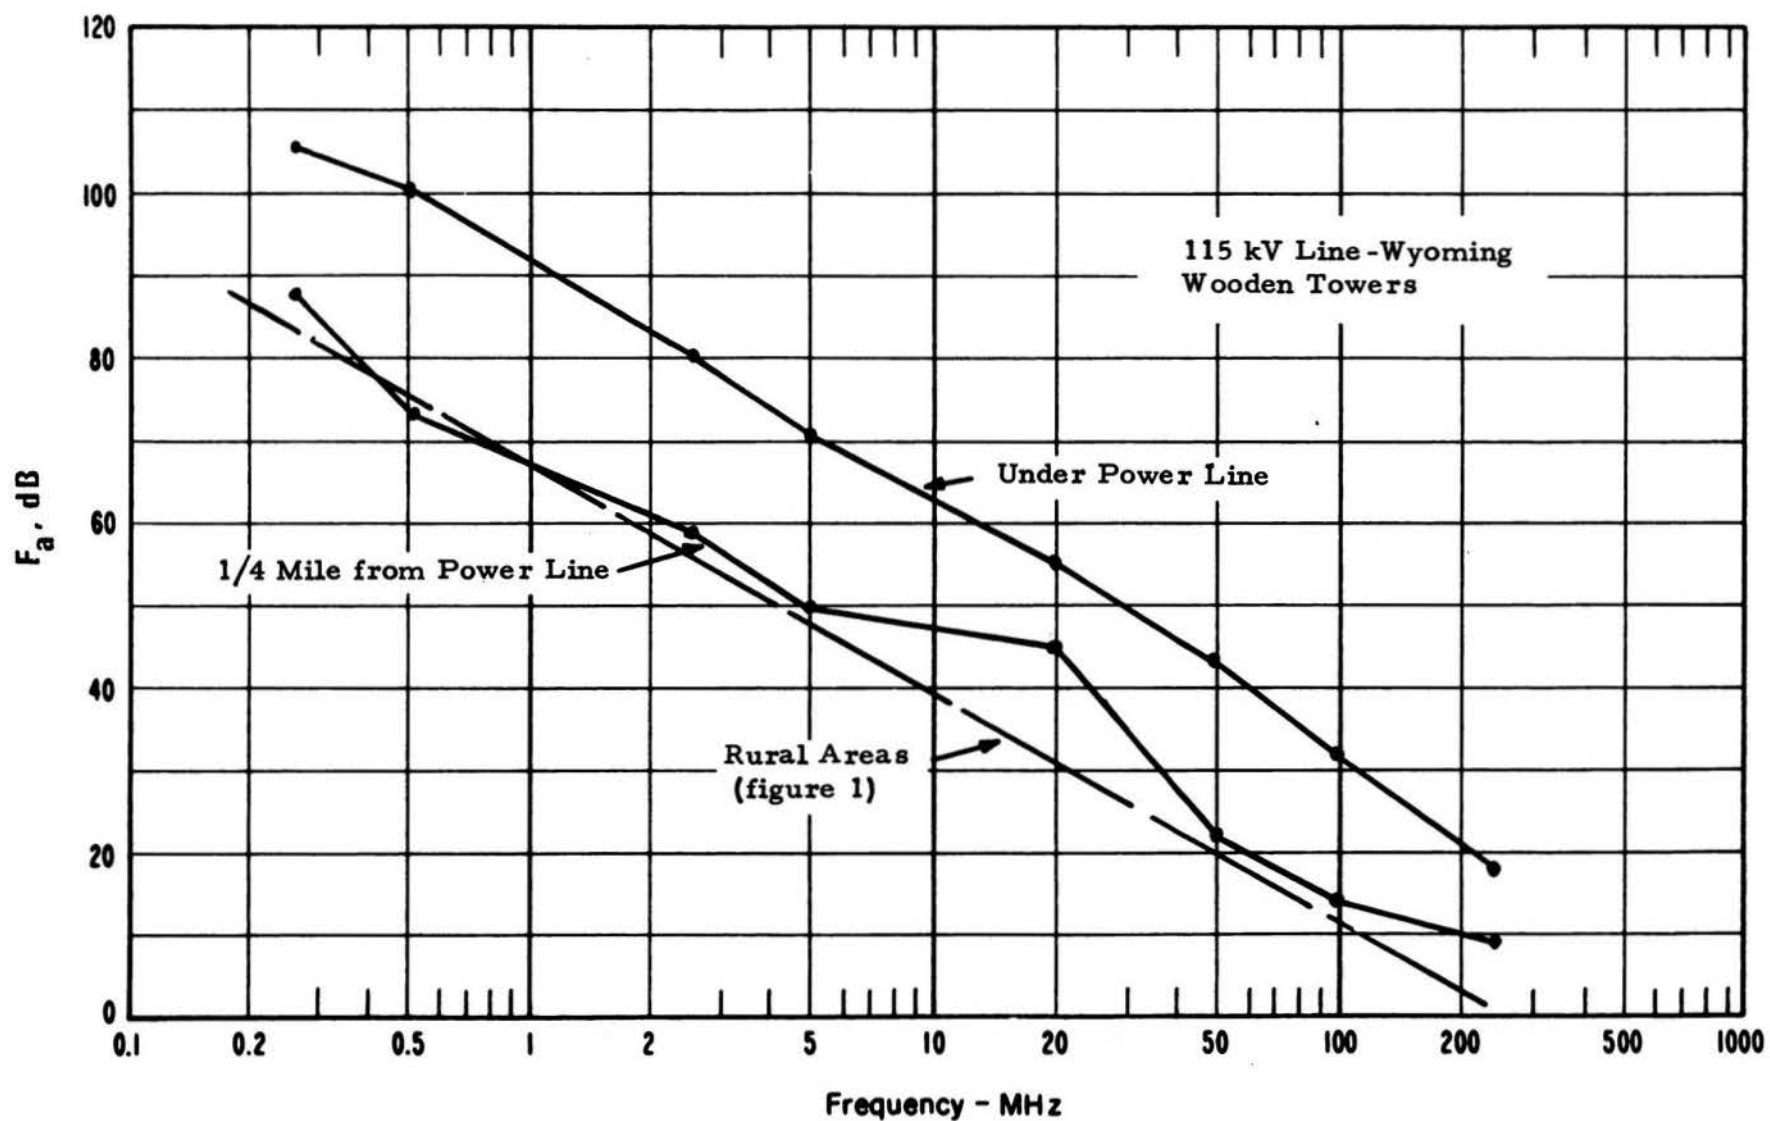


Figure 16. Power line noise measurements taken moving parallel to a 115 kV line in rural Wyoming, both under the line and 1/4 mile from the line.

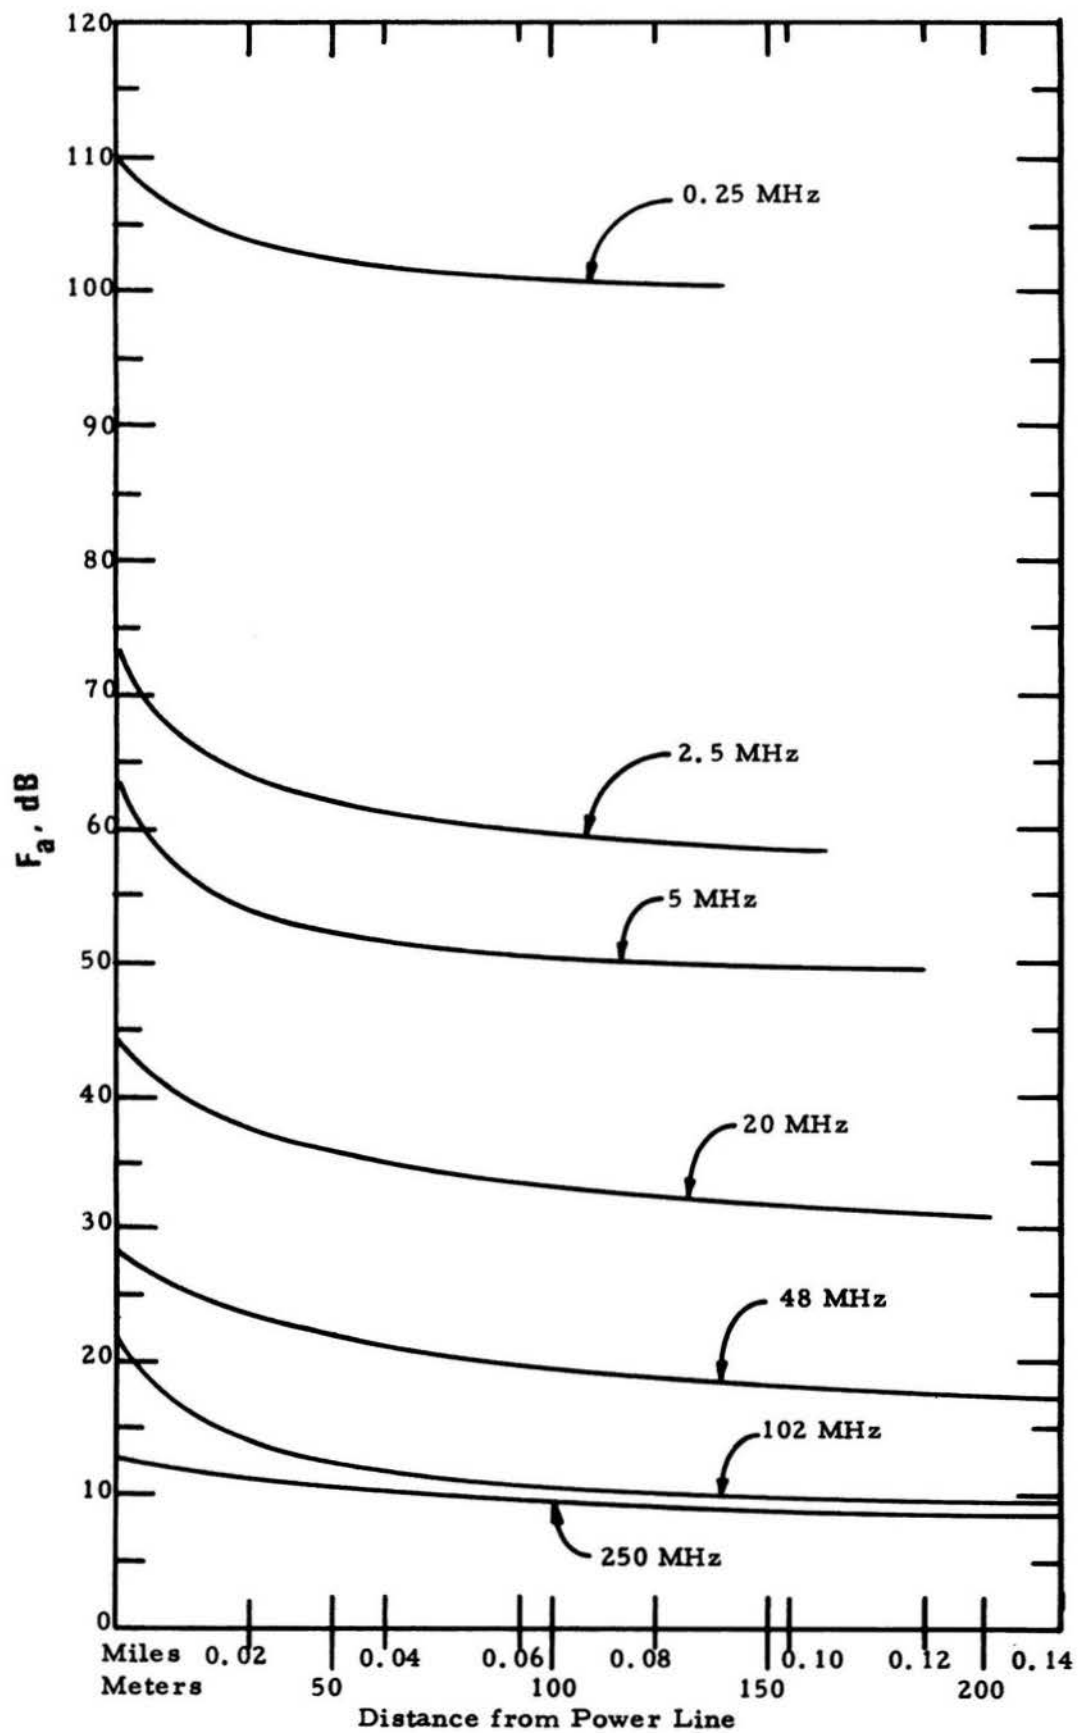


Figure 17. Expected decrease of radio noise radiated from 115 kV H-frame power line with distance from line.

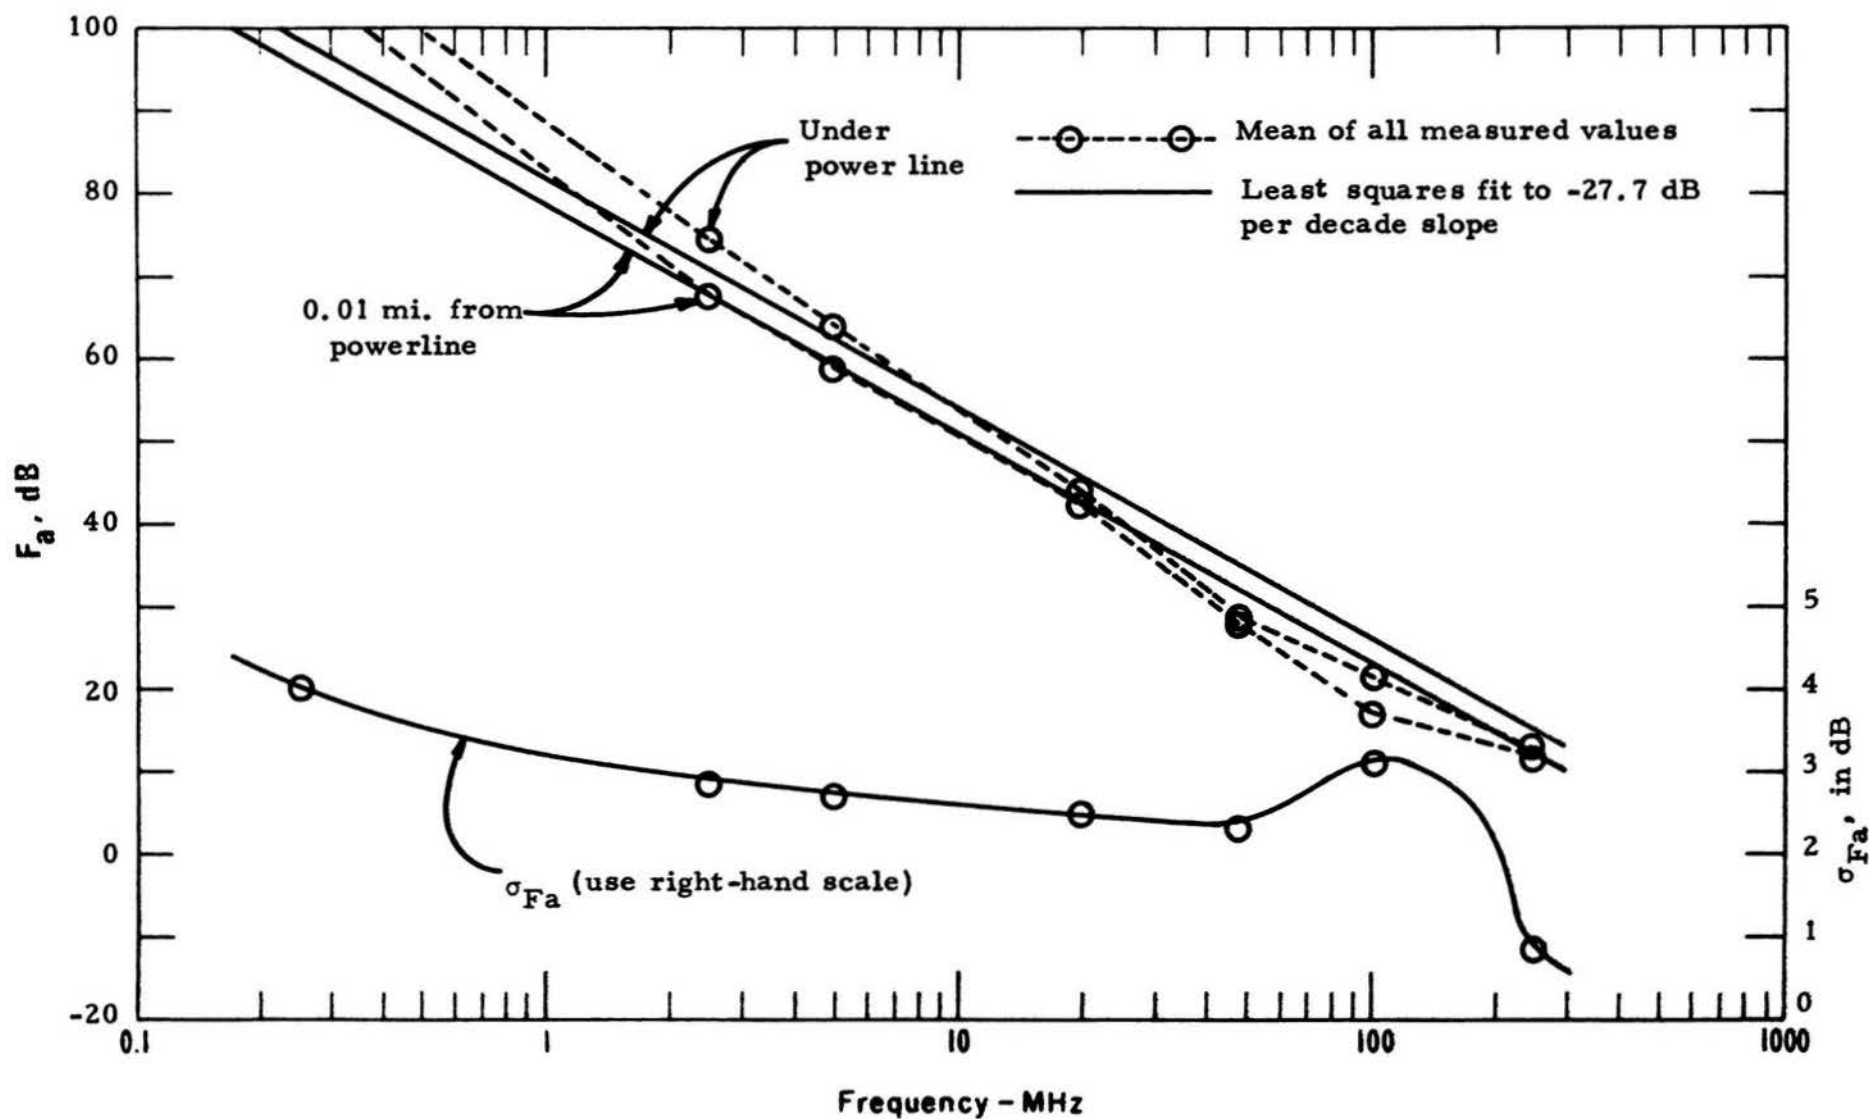


Figure 18. Expected radio noise power, F_a , and its standard deviation, σ_{F_a} , from 115 kV, H-frame power transmission line. Receiving antenna under and 0.01 mi. (16.09 meters) from power line.

4.2 The Average and Logarithmic Moments, V_d and L_d

As previously mentioned, the ratio of the rms to the average envelope voltage, V_d , in decibels, and the ratio of the rms to the antilog of the average logarithm of the envelope voltage, L_d , in decibels, are indicative of the impulsive nature of the noise (Crichlow et al., 1960).

Values of V_d and L_d are available from the same sets of measurements used to obtain the estimates of F_a . These data were separated into the same groupings as the values of F_a . Two bandwidths were used in taking the measurements, 4 kHz and 10 kHz. The earlier measurements were all made using the 10 kHz bandwidth. An analog tape recorder (Appendix A) was added to the measurement capability which limited the bandwidth that could be used to 4 kHz. Therefore, all of the latter measurements were made using the 4 kHz bandwidth. Since the values of V_d and L_d for radio noise are dependent on bandwidth, the data were further separated into subgroups of 4 kHz and 10 kHz data. The means of the individual location median values for each subgroup are shown plotted on figures 19 through 22. Figures 19 and 20 show values of V_d and L_d , respectively, for measurements made in a 4 kHz bandwidth for the three types of areas. Figures 21 and 22 are the corresponding measurements made using a 10 kHz bandwidth. The values of V_d and L_d for white Gaussian noise, which are independent of bandwidth and frequency, are also shown on figures 19 through 22. As with the values of F_a , there is a fairly large variation of the median values from location to location in a particular type of area. This variation is indicated in table 3 where the standard deviations of $V_d(\sigma_{V_d})$ and $L_d(\sigma_{L_d})$ are shown for the various types of areas, bandwidths, and frequencies.

As can be seen from figures 19 through 22, there is a definite difference in the character of the noise in the three types of areas. While

Table 3. Variation of the Median Value of V_d and L_d with Location for a Given Frequency and Bandwidth

Frequency (MHz)	Standard Deviation of V_d , σ_{V_d} (dB)					
	Business Areas		Residential Areas		Rural Areas	
	BW 4 kHz	BW 10 kHz	BW 4 kHz	BW 10 kHz	BW 4 kHz	BW 10 kHz
0.25	1.6	2.2	1.1	1.8	0.6	1.0
0.5	1.2	2.6	0.2	1.2	0.6	0.6
1.0		1.0		0.9		2.3
2.5	2.5	2.6	1.6	2.6	2.0	1.7
5	1.3	1.1	1.4	1.3	0.5	1.0
10		1.5		1.9		0.9
20	2.2	1.8	1.4	1.4	1.4	0.9
48	1.6	1.4	1.8	1.8	1.4	0.4
102	1.4		1.8		1.3	
250	0.7		0.5		0.5	
Average	1.6	1.8	1.2	1.5	1.0	1.1

Frequency (MHz)	Standard Deviation of L_d , σ_{L_d} (dB)					
	Business Areas		Residential Areas		Rural Areas	
	BW 4 kHz	BW 10 kHz	BW 4 kHz	BW 10 kHz	BW 4 kHz	BW 10 kHz
0.25	3.1	3.7	1.2	2.7	1.3	1.1
0.5	2.7	4.3	0.6	2.1	1.2	1.1
1.0		1.3		1.2		3.2
2.5	4.2	4.2	1.8	3.5	2.3	2.9
5	1.8	2.0	2.0	1.8	0.9	1.4
10		2.1		2.5		1.3
20	3.3	3.2	2.3	2.4	1.9	1.0
48	2.5	2.7	2.2	2.7	1.4	0.5
102	2.2		2.6		2.8	
250	1.1		1.0		0.6	
Average	2.6	2.9	1.6	2.0	1.6	1.6

there is considerable overlap, considering the values in table 3, the general trends are fairly well defined. Figures 23, for business areas, 24, for residential areas, and 25, for rural areas, give the expected median values of V_d and L_d . The solid line is the estimate for a 4 kHz bandwidth and the dashed for 10 kHz. These are estimates for the mean of the individual location median values. The estimates are based on least squares polynomial fits to the measurement data. As with F_a , the distribution of the location medians, in decibels, can be represented quite well by a normal distribution. The values of σ_{V_d} and σ_{L_d} shown in table 3 can be used in the same manner as σ_{F_a} in table 1 to determine the probability of a median value occurring at any location within a particular type of area.

There will be a variation about the location median with time at any given location, which will generally be larger than the variation from location to location. Again, as with F_a , this variation within an hour can be represented quite closely by a skewed normal distribution, defined by the median and upper and lower decile values. Using the same 20 MHz residential area recordings used to obtain within the hour variation of F_a (fig. 3), a distribution of the 10-sec readings of V_d is shown on figure 26 and of L_d on figure 27. These distributions are typical of those generally found in business and residential areas. The distributions found in rural areas will have the same form but will usually be much flatter. The ratio, in decibels, of the upper decile to the median value of the distribution shown on figure 26 is 4.8 dB. The average value of this ratio for 20 MHz rural area data is 0.8 dB. Similarly, the ratio of the upper decile to the median for the distribution of the L_d values in figure 27 is 7.0 dB, while the corresponding rural average value is 1.0 dB.

Interstate highways and parks and university campuses were analyzed separately for values of V_d and L_d . The results are shown on figures 28 for V_d and 29 for L_d , with the measurement bandwidth indicated. The results for both V_d and L_d from the interstate highway measurements are similar to the business area estimate above 10 MHz and similar to the rural area estimate at lower frequencies. This is to be expected, since the man-made noise is caused predominantly by ignition systems at the higher frequencies and power lines at the lower frequencies.

The park and university campus curves appear to fall somewhere between the residential and rural curves. Most parks and campuses have somewhat restricted traffic patterns and few overhead power lines and would be expected, therefore, to approach the general rural conditions.

As with the values of F_a , the values of V_d and L_d were measured using a short vertical antenna. There is even less information on the effect of polarization on V_d and L_d than there is on F_a . At the time the 250 MHz data shown on figure 13 were recorded, the values of V_d for the two antennas were also recorded. These data are shown plotted on figure 30 along with the best fit regression line. As can be seen, the value of V_d for the vertical component is generally larger than the value for the horizontal component. The recorded man-made radio noise in this case was almost exclusively from automotive ignition systems. This relationship would indicate that the vertical component was more impulsive for ignition noise than the horizontal component. However, the sample size was extremely small (17 sets of 10 sec measurements).

Two computer plots of the relationships between the three moments, F_a , V_d , and L_d , are interesting. The high degree of correlation between V_d and L_d is shown on figure 31. The values of 673 V_d and the corresponding L_d location medians obtained by combining the data for

all frequencies and locations are plotted. Since the values of both V_d and L_d are dependent upon the instantaneous variations of the noise envelope, a fairly high correlation between the two values would be expected. With as high a correlation coefficient ($r = 0.94$) as was obtained, the value of V_d may give an adequate definition for the most likely APD as was found to be the case with atmospheric radio noise (Crichlow et al., 1960; CCIR, 1964). Figure 32 shows the lack of correlation between V_d and F_a . The very low correlation coefficient ($r = -0.07$) shown by the 673 pairs of V_d and F_a indicates that the character of the noise, that is the impulsive nature or instantaneous envelope variations, is not dependent upon the power level. It is a function of the types and number of sources of the composite man-made radio noise and their distribution about the receiving antenna and not of the actual received power level.

Since man-made noise is white (flat spectrum over normal communications bandwidth), the values estimated for F_a are independent of bandwidth as long as bandwidths limited to a few percent of the center frequency are considered. Since the values of V_d and L_d are dependent on bandwidth, the estimates given here are only applicable to these measurement bandwidths.

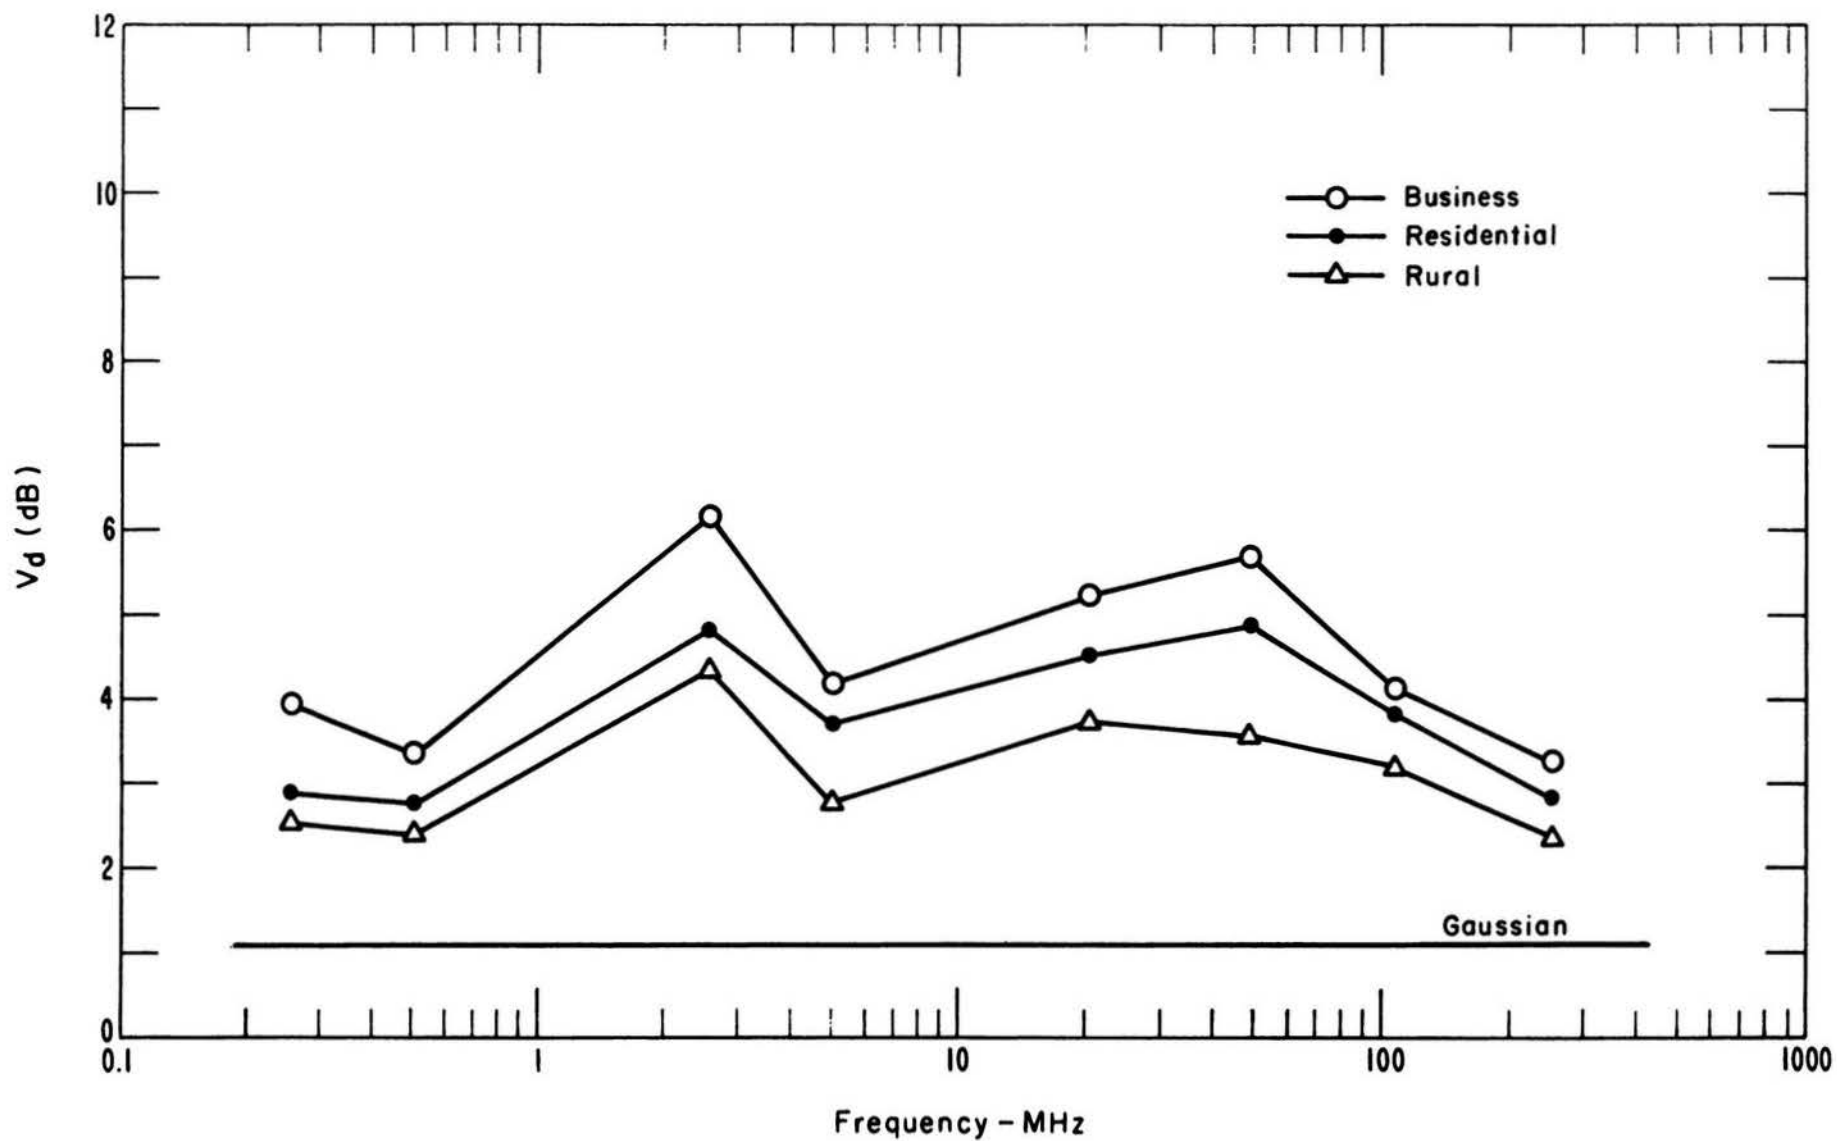


Figure 19. Mean of location median values of V_d , values measured in a 4-kHz bandwidth.

50

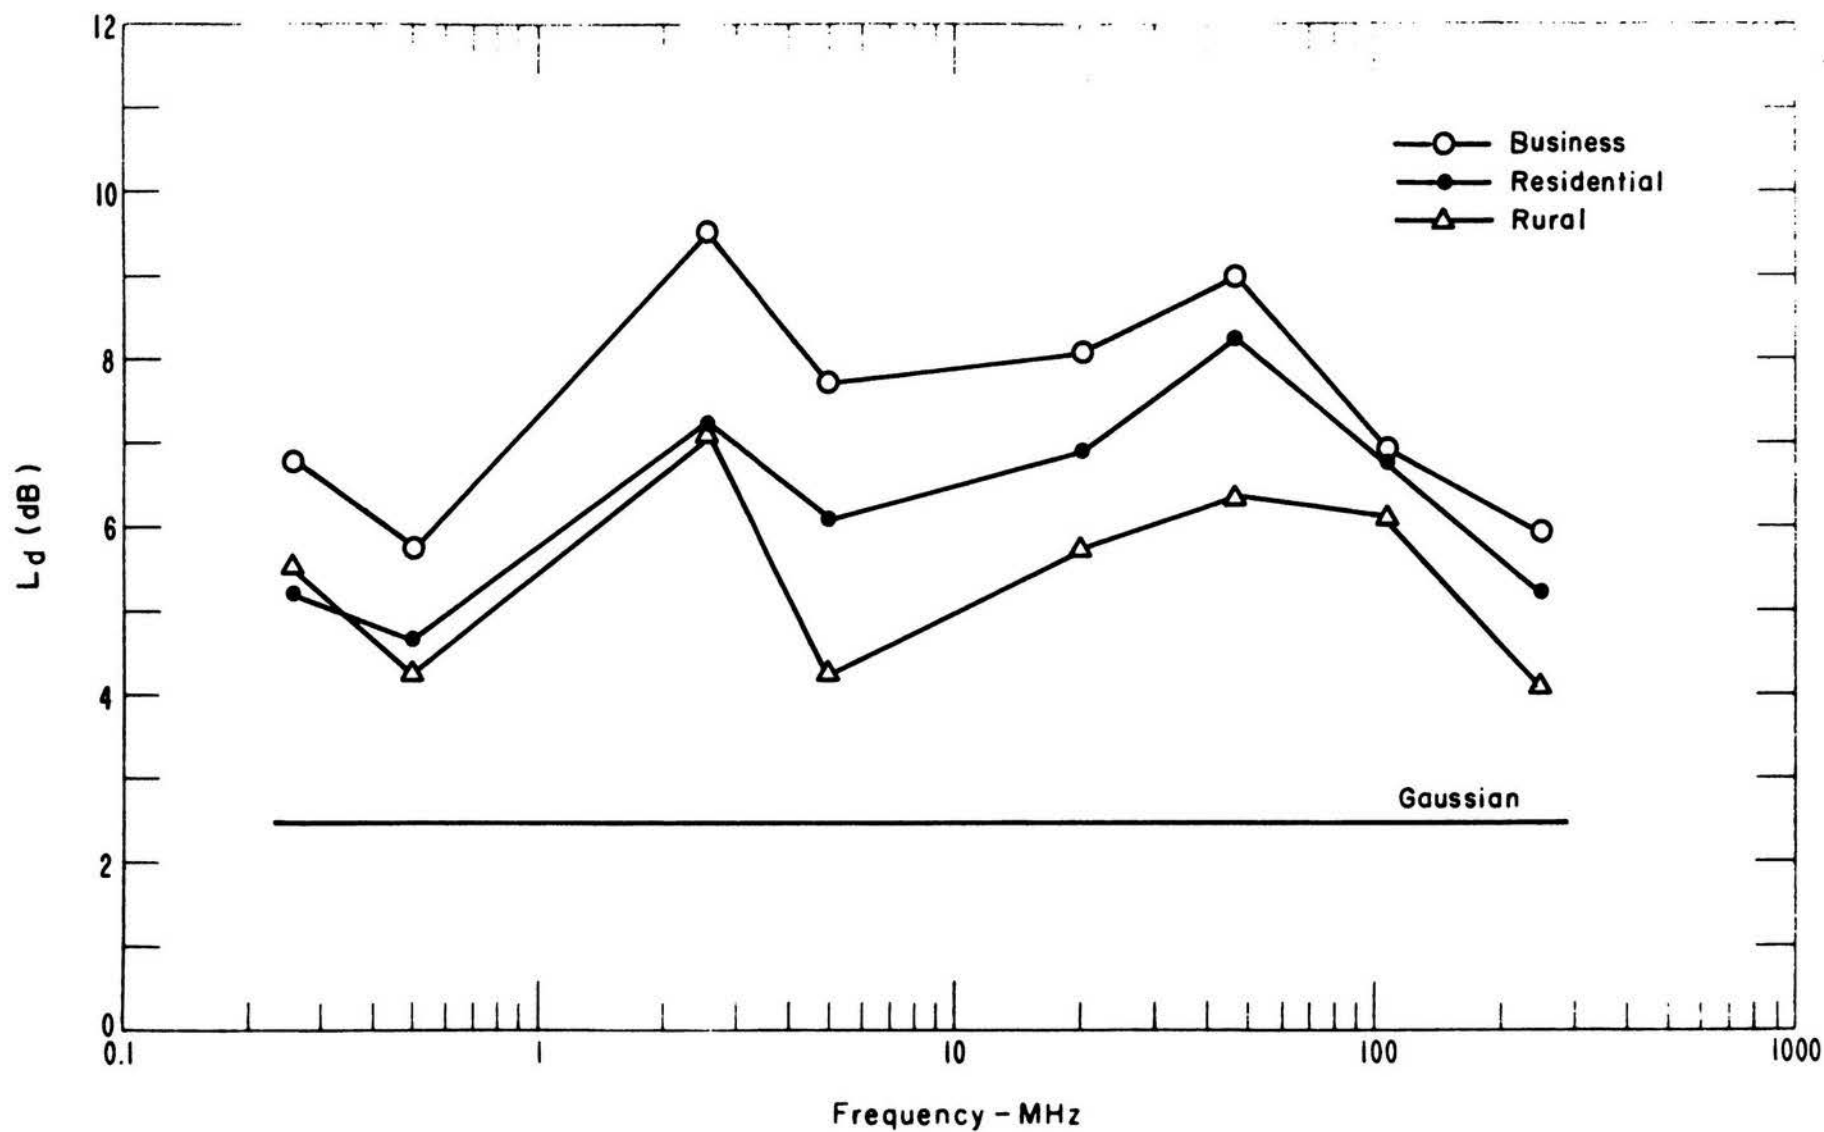


Figure 20. Mean of location median values of L_d , values measured in a 4-kHz bandwidth.

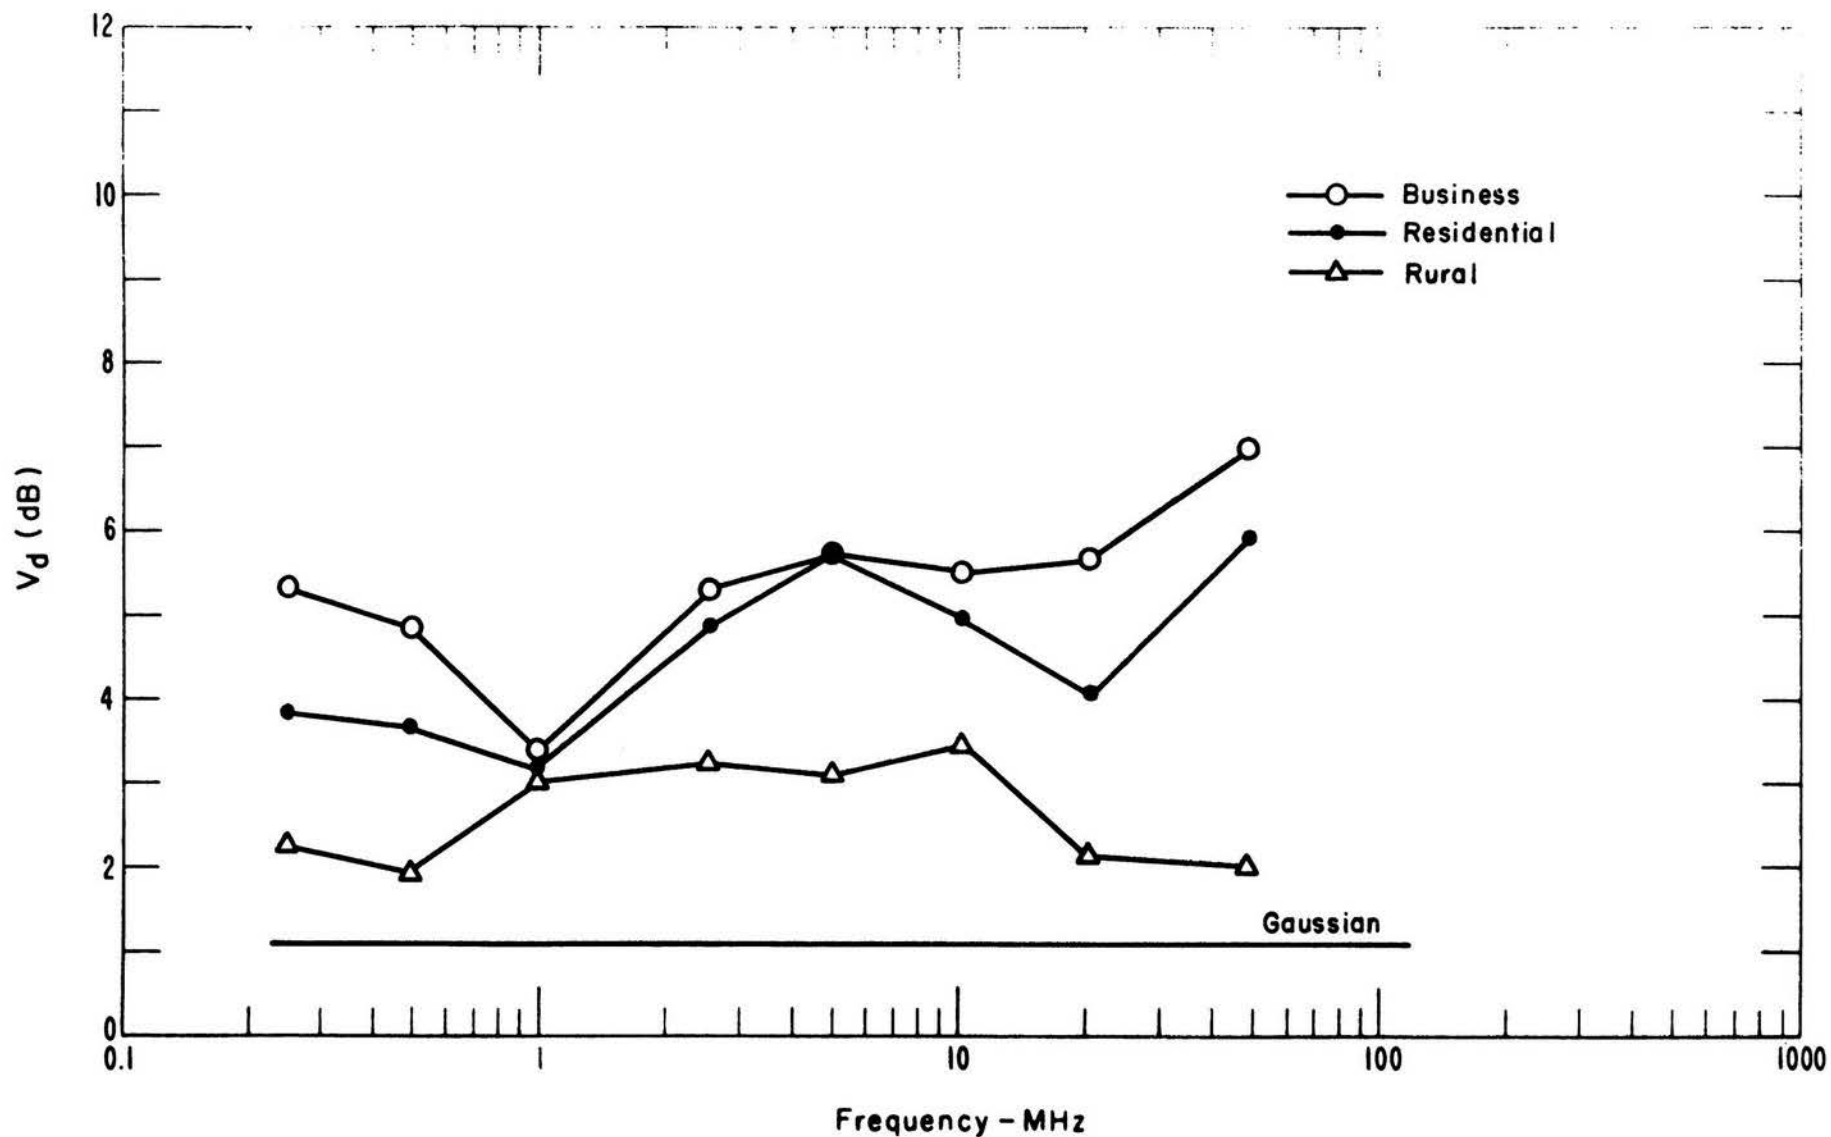


Figure 21. Mean of location median values of V_d , values measured in a 10-kHz bandwidth.

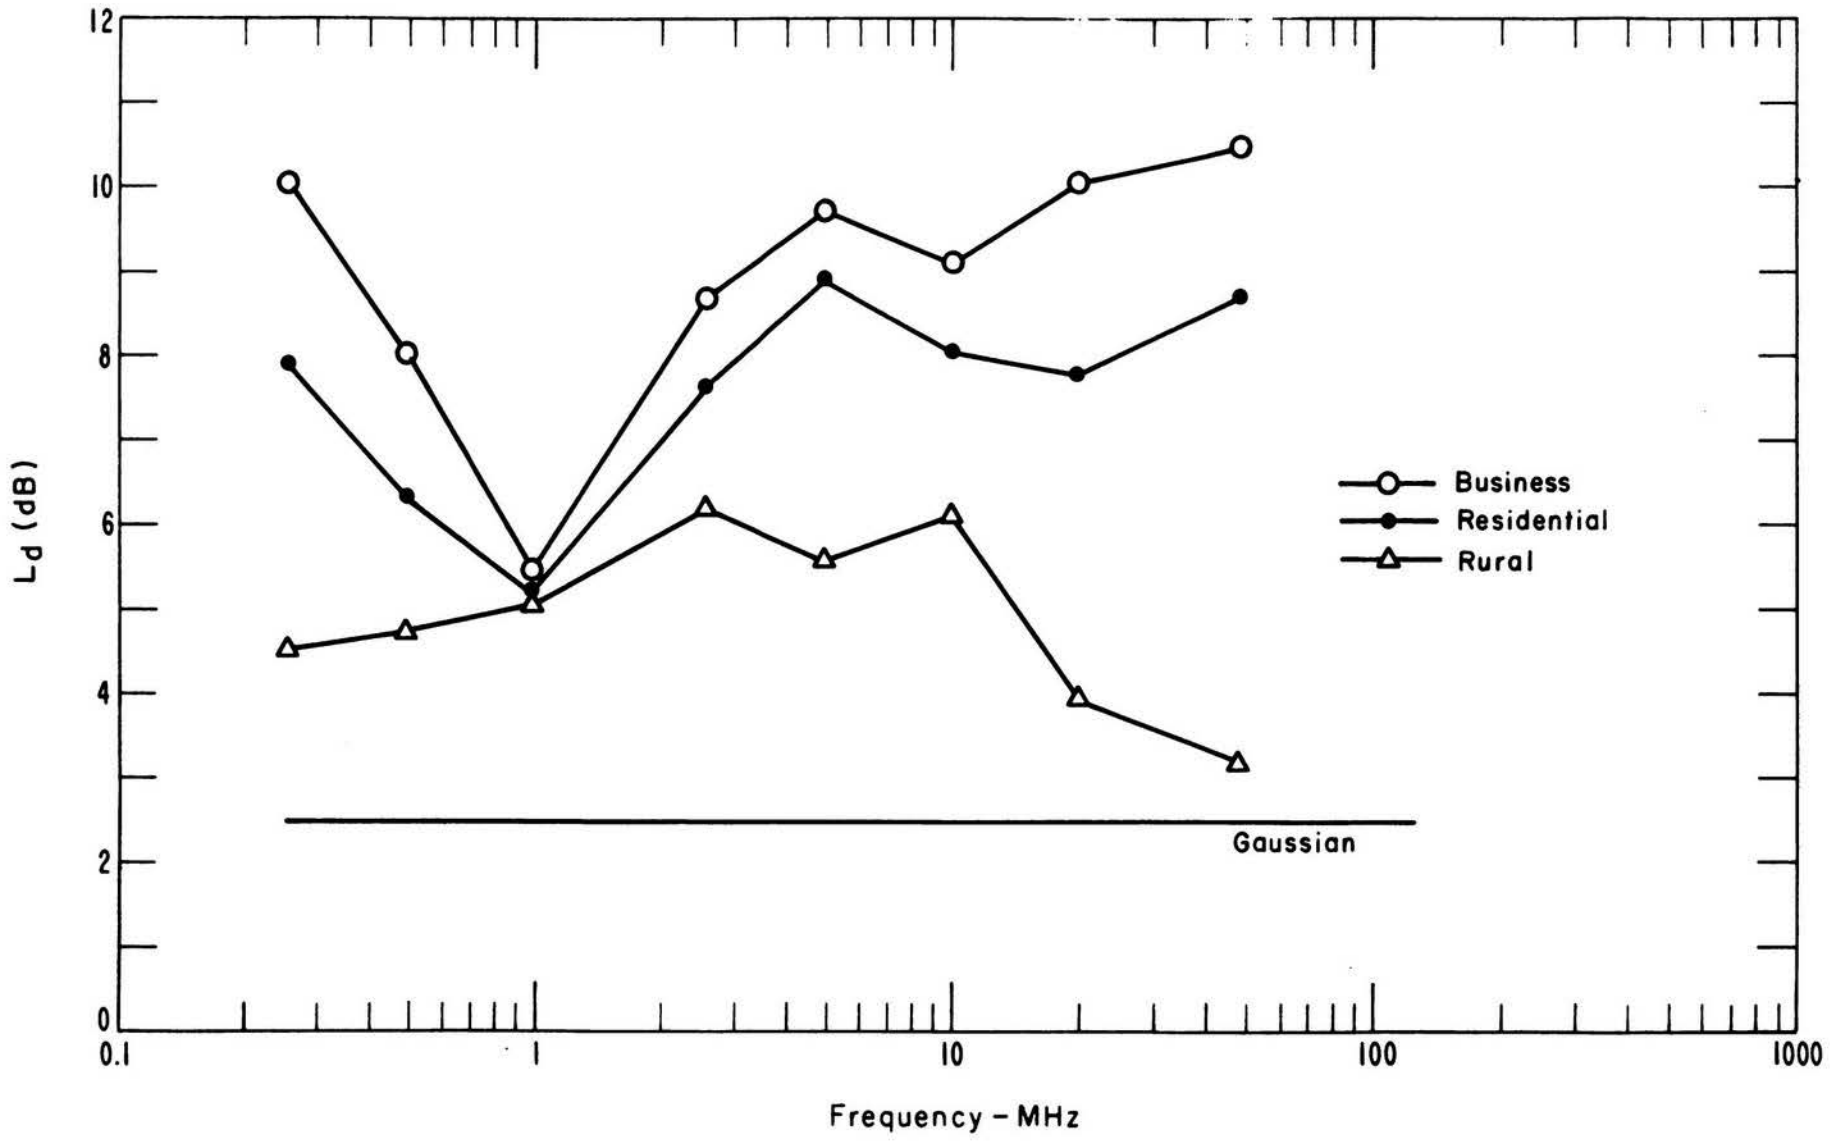


Figure 22. Mean of location median values of L_d , values measured in a 10-kHz bandwidth.

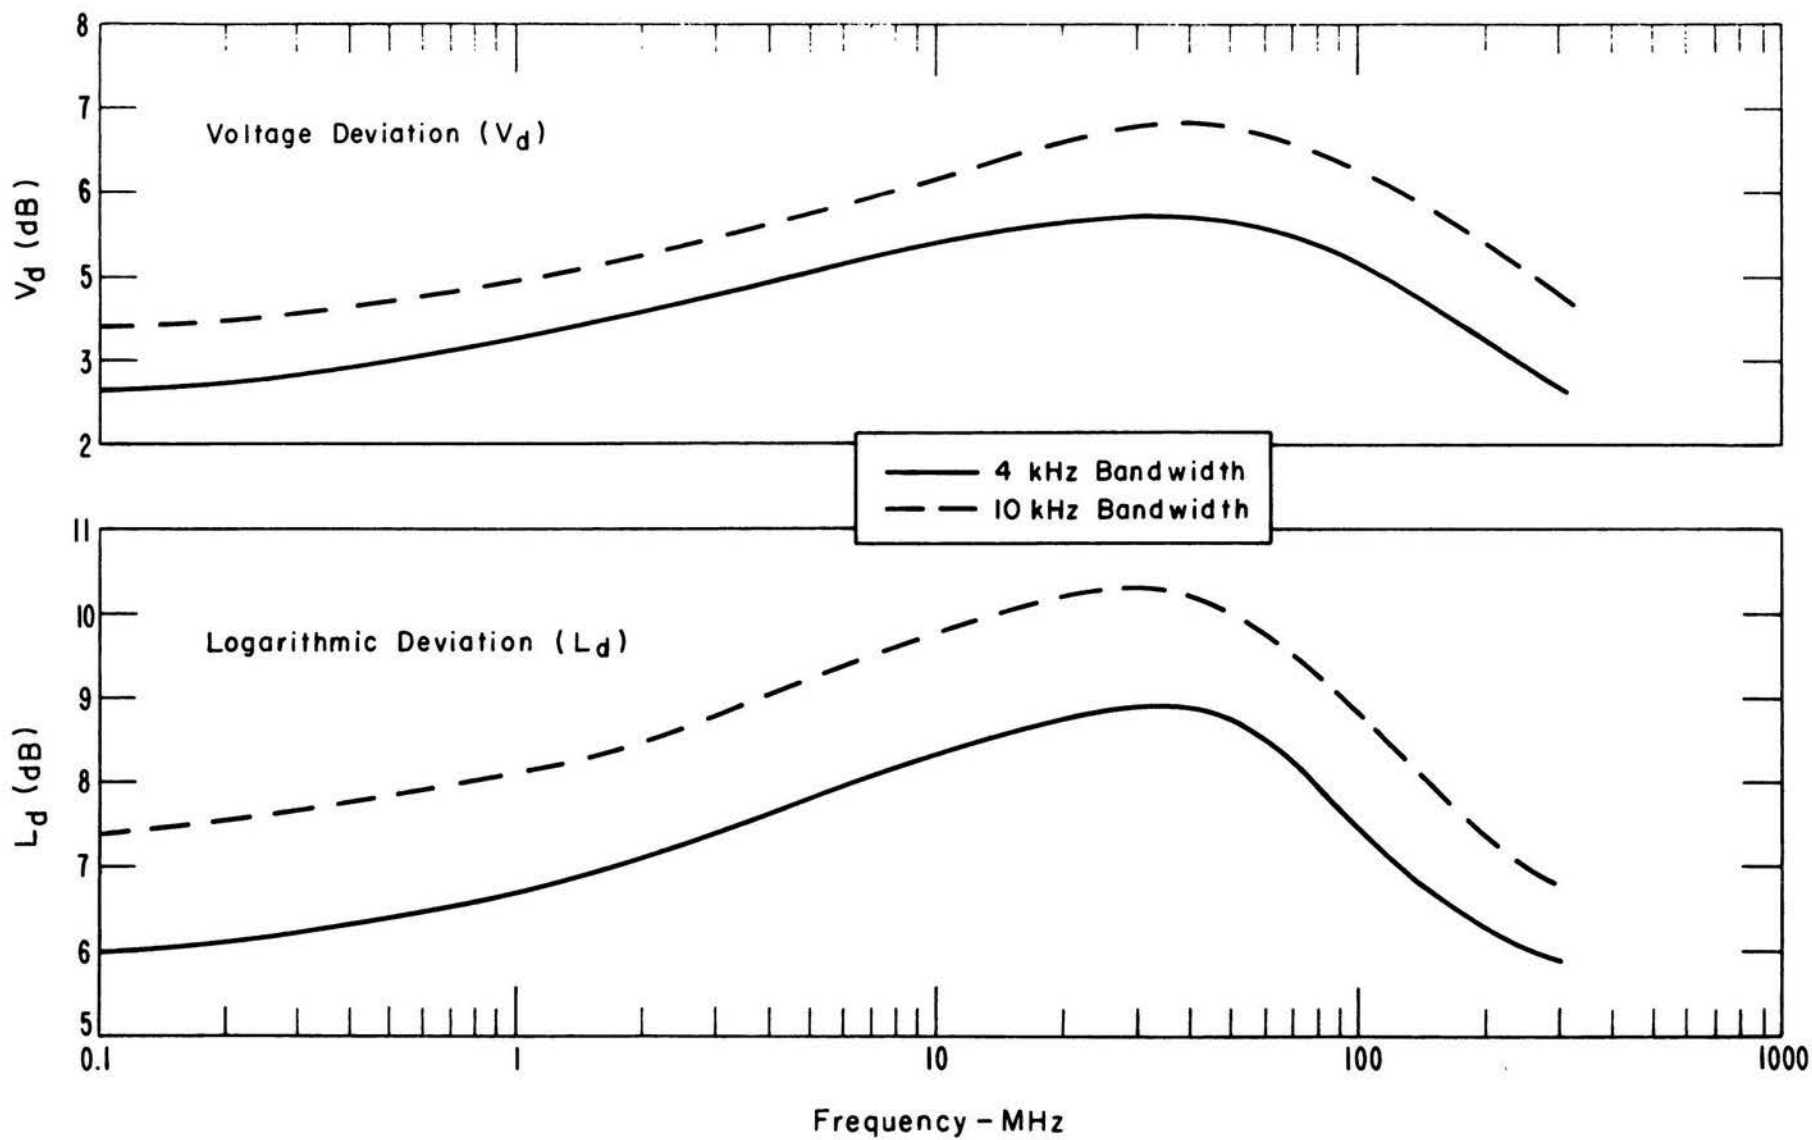


Figure 23. Expected median values of V_d and L_d for business areas.

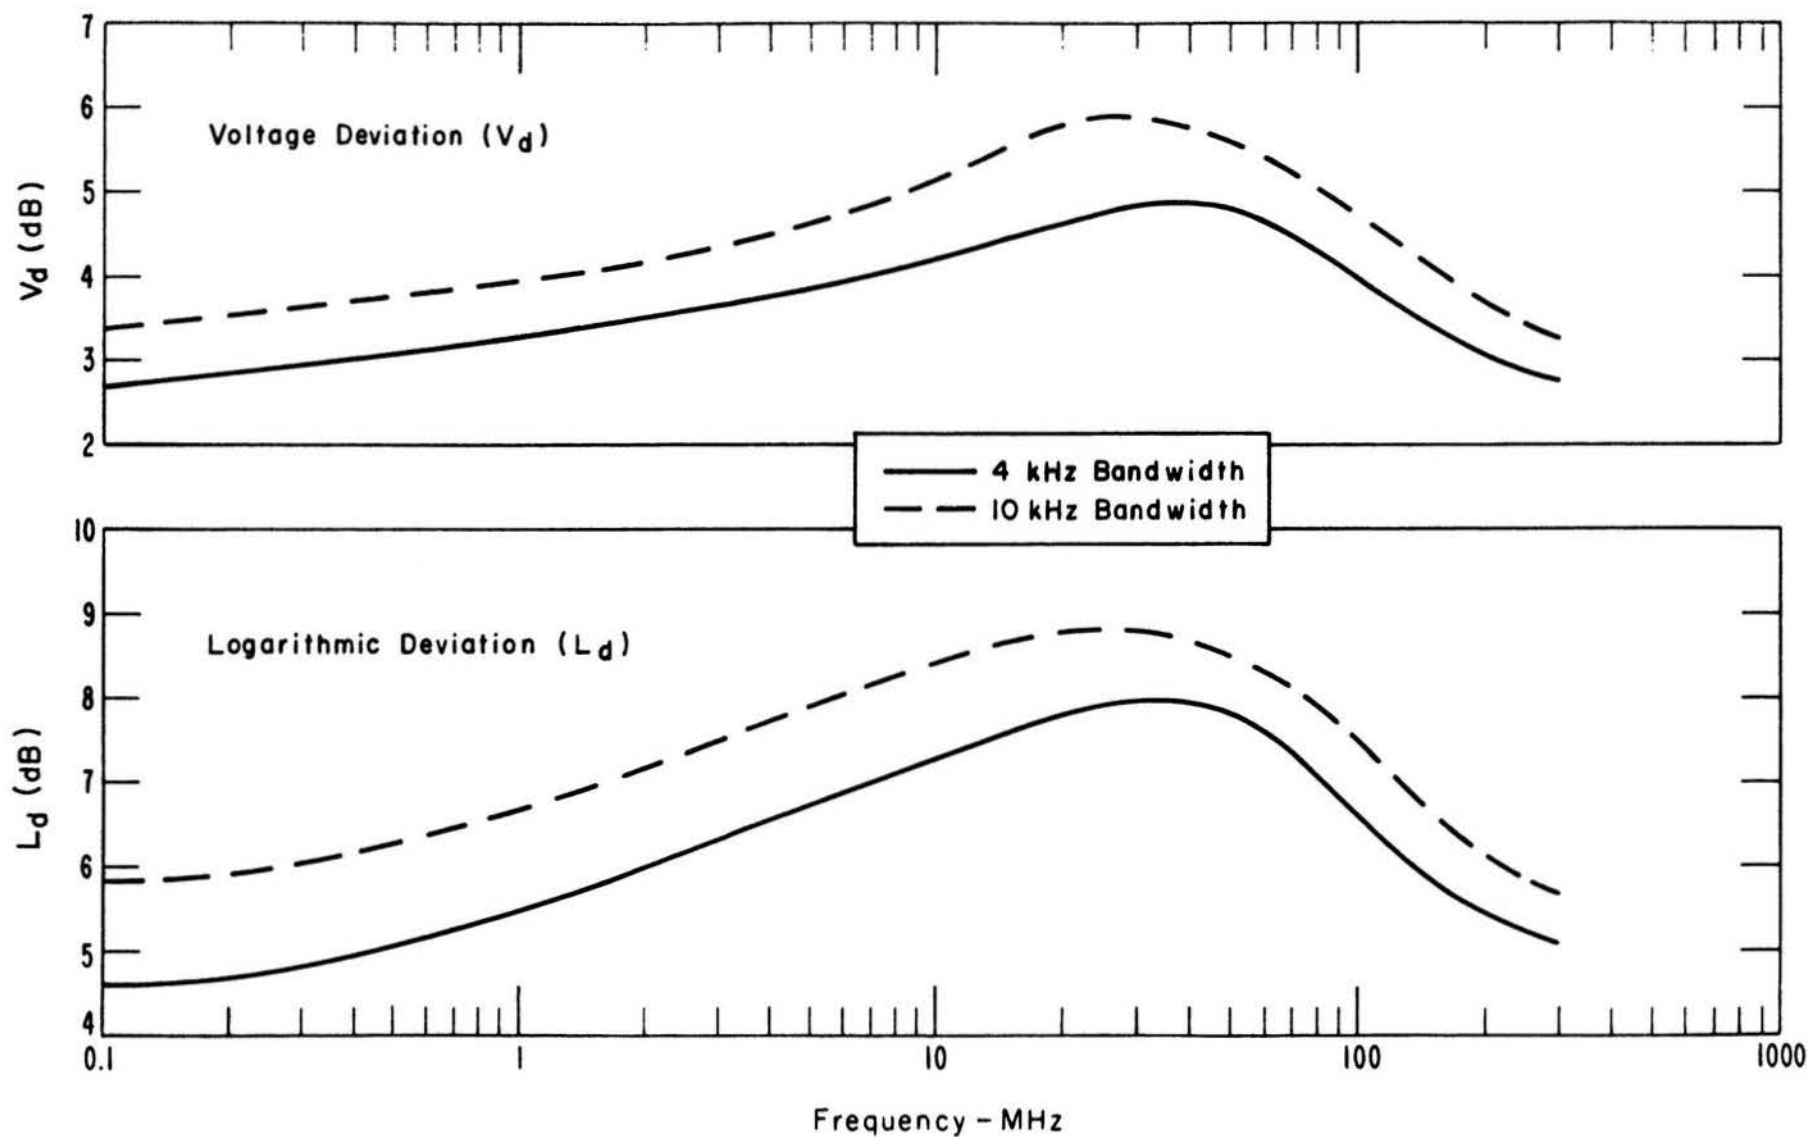


Figure 24. Expected median values of V_d and L_d for residential areas.

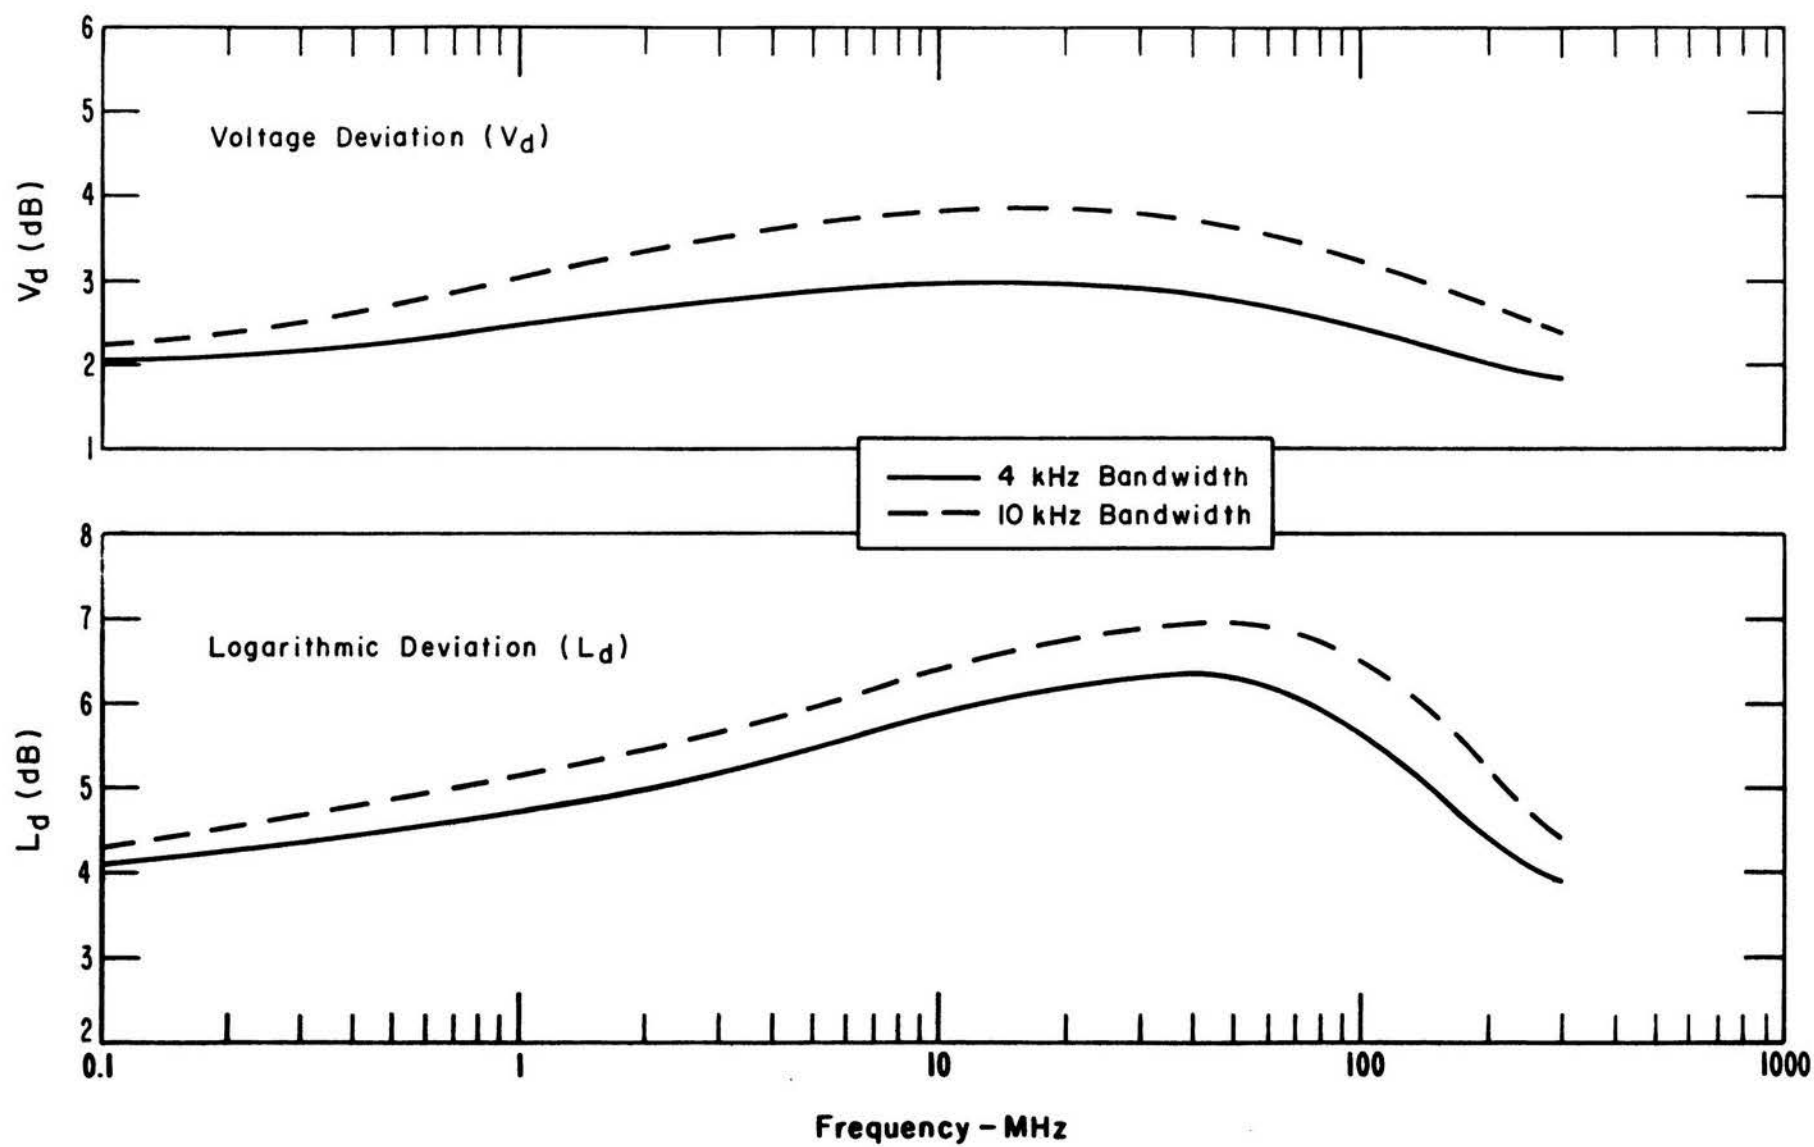


Figure 25. Expected median values of V_d and L_d for rural areas.

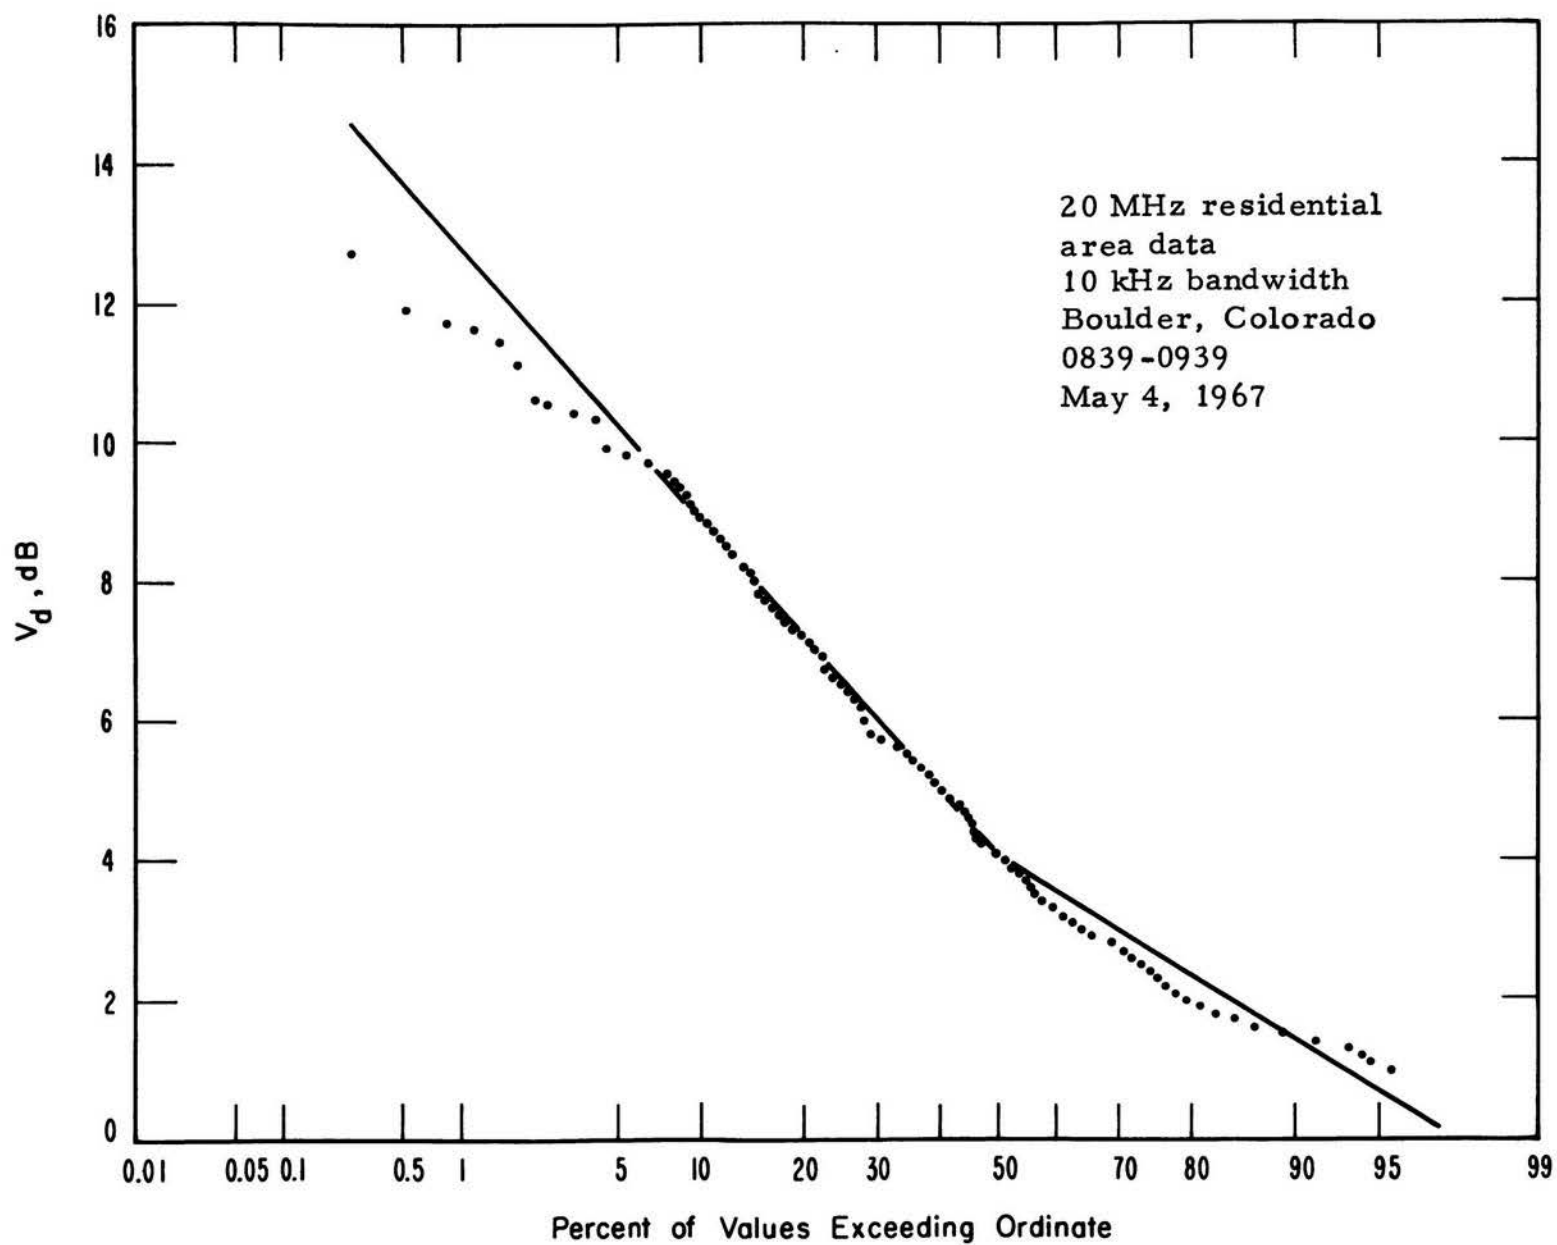


Figure 26. Distribution of V_d within an hour for a residential area.

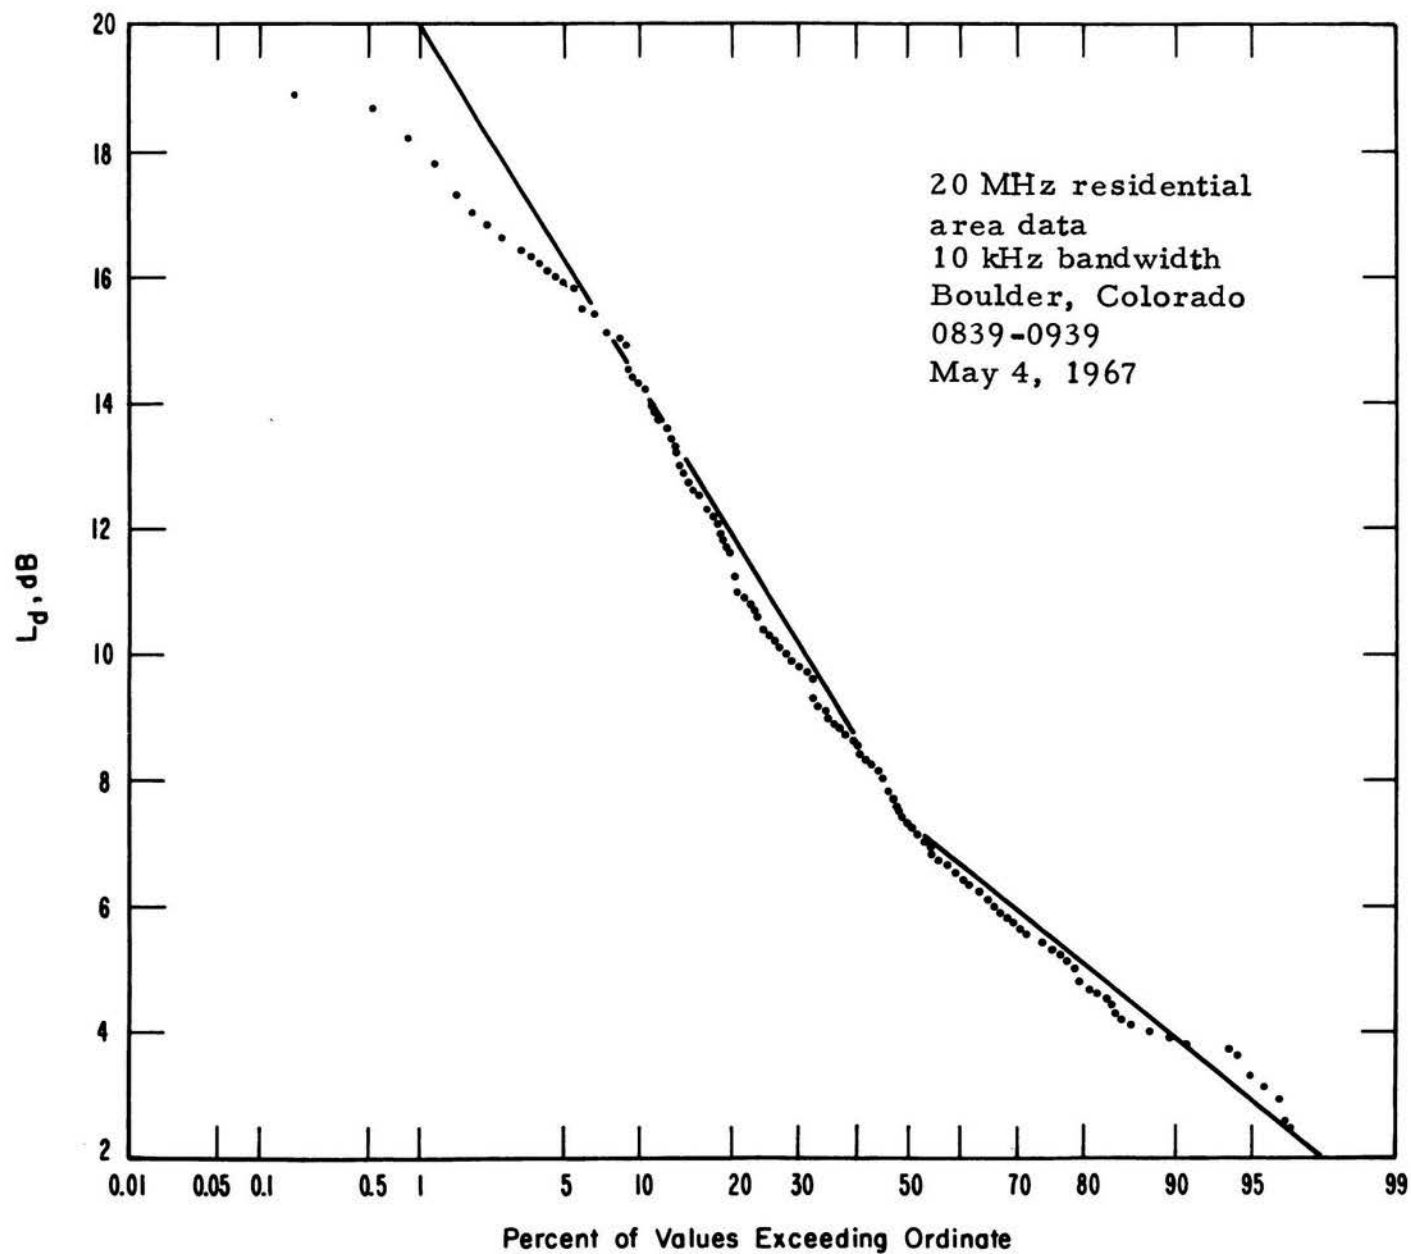


Figure 27. Distribution of L_d within an hour for a residential area.

58

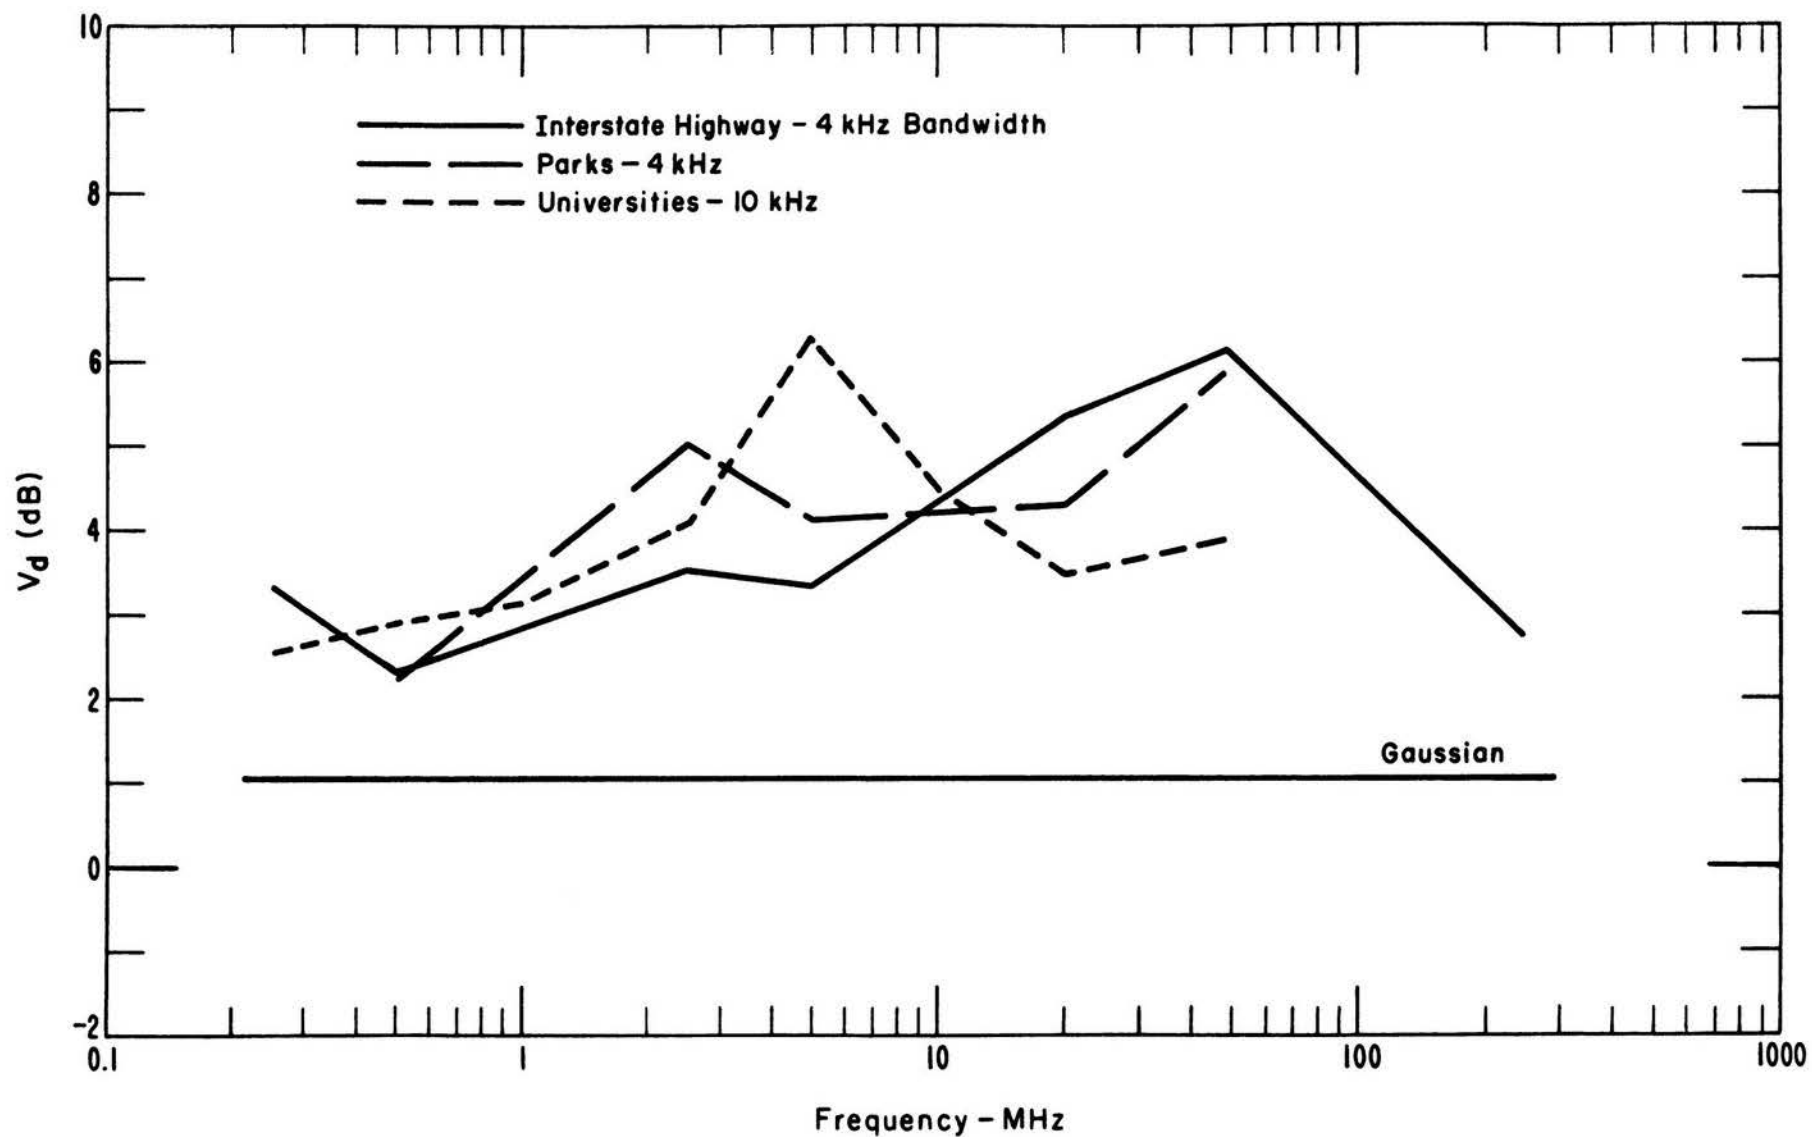


Figure 28. Median values of V_d measured along interstate highways, in parks, and on university campuses.

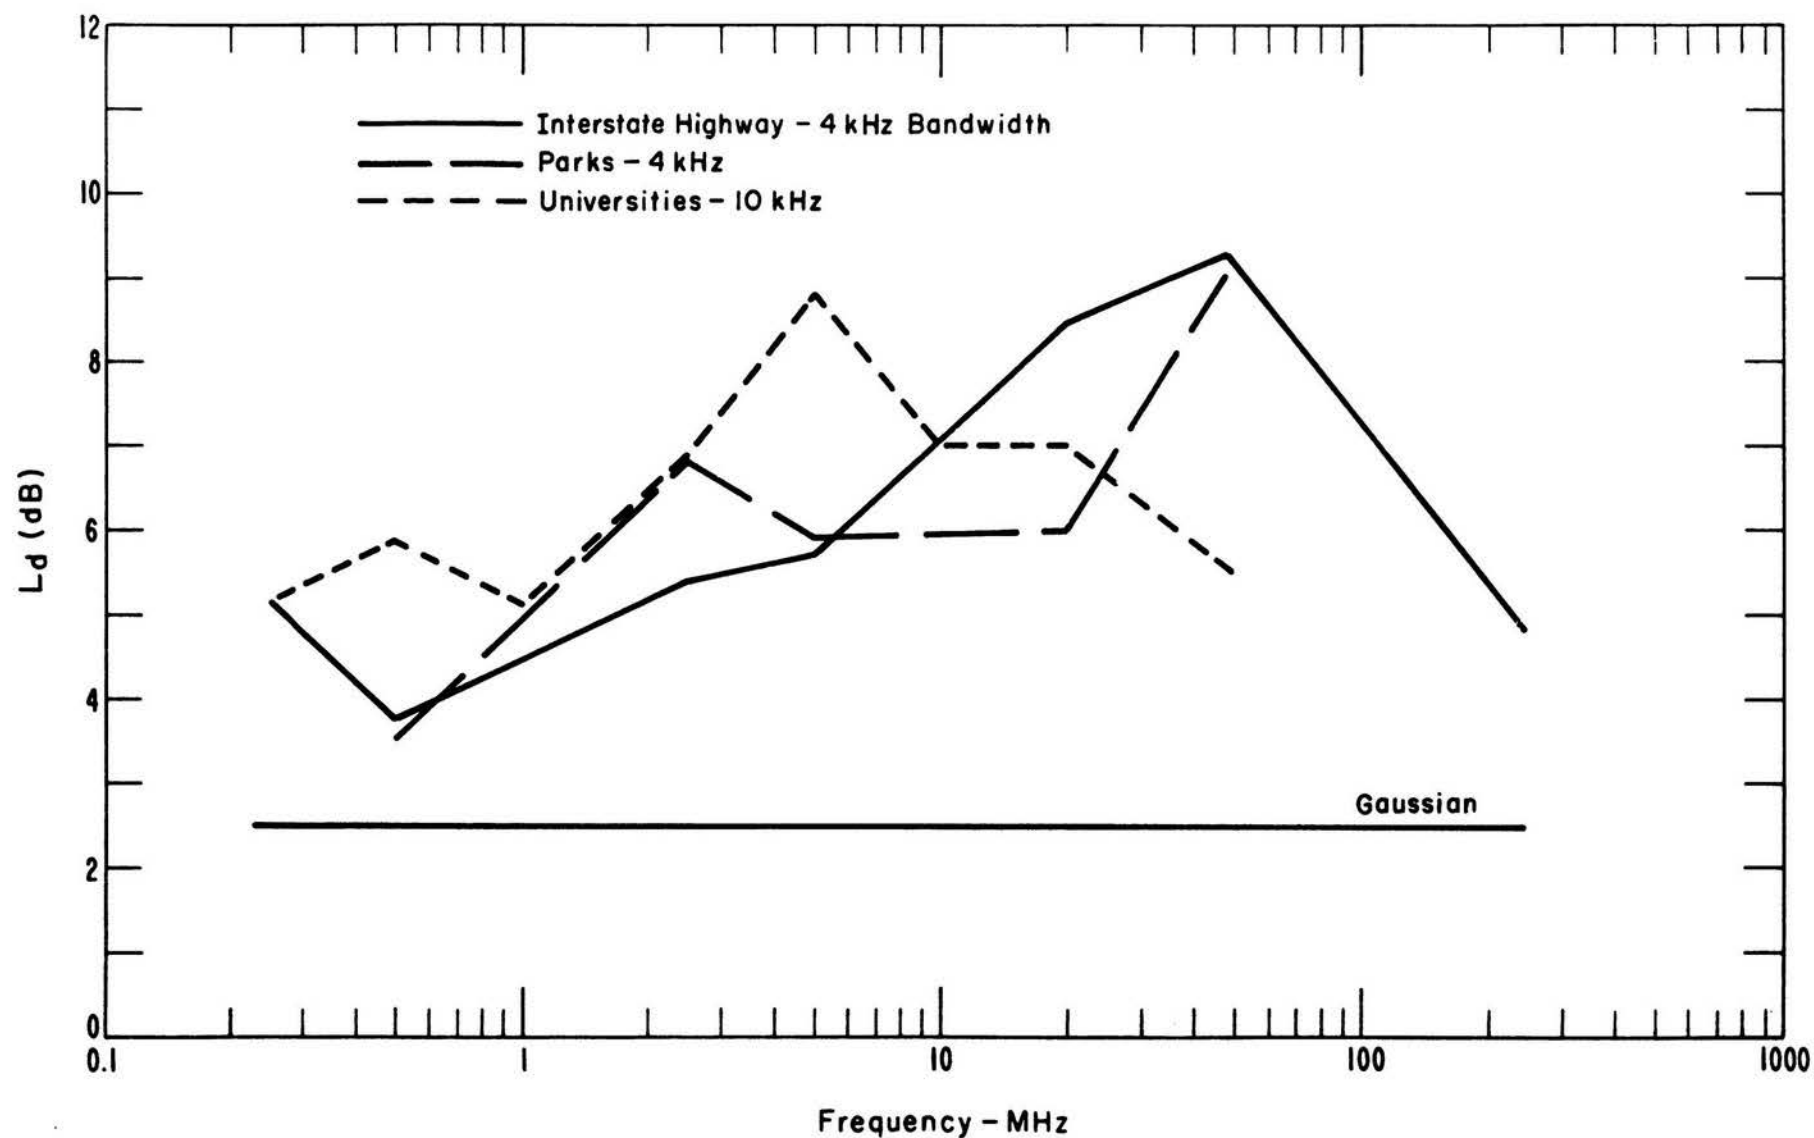


Figure 29. Median values of L_d measured along interstate highways, in parks, and on university campuses.

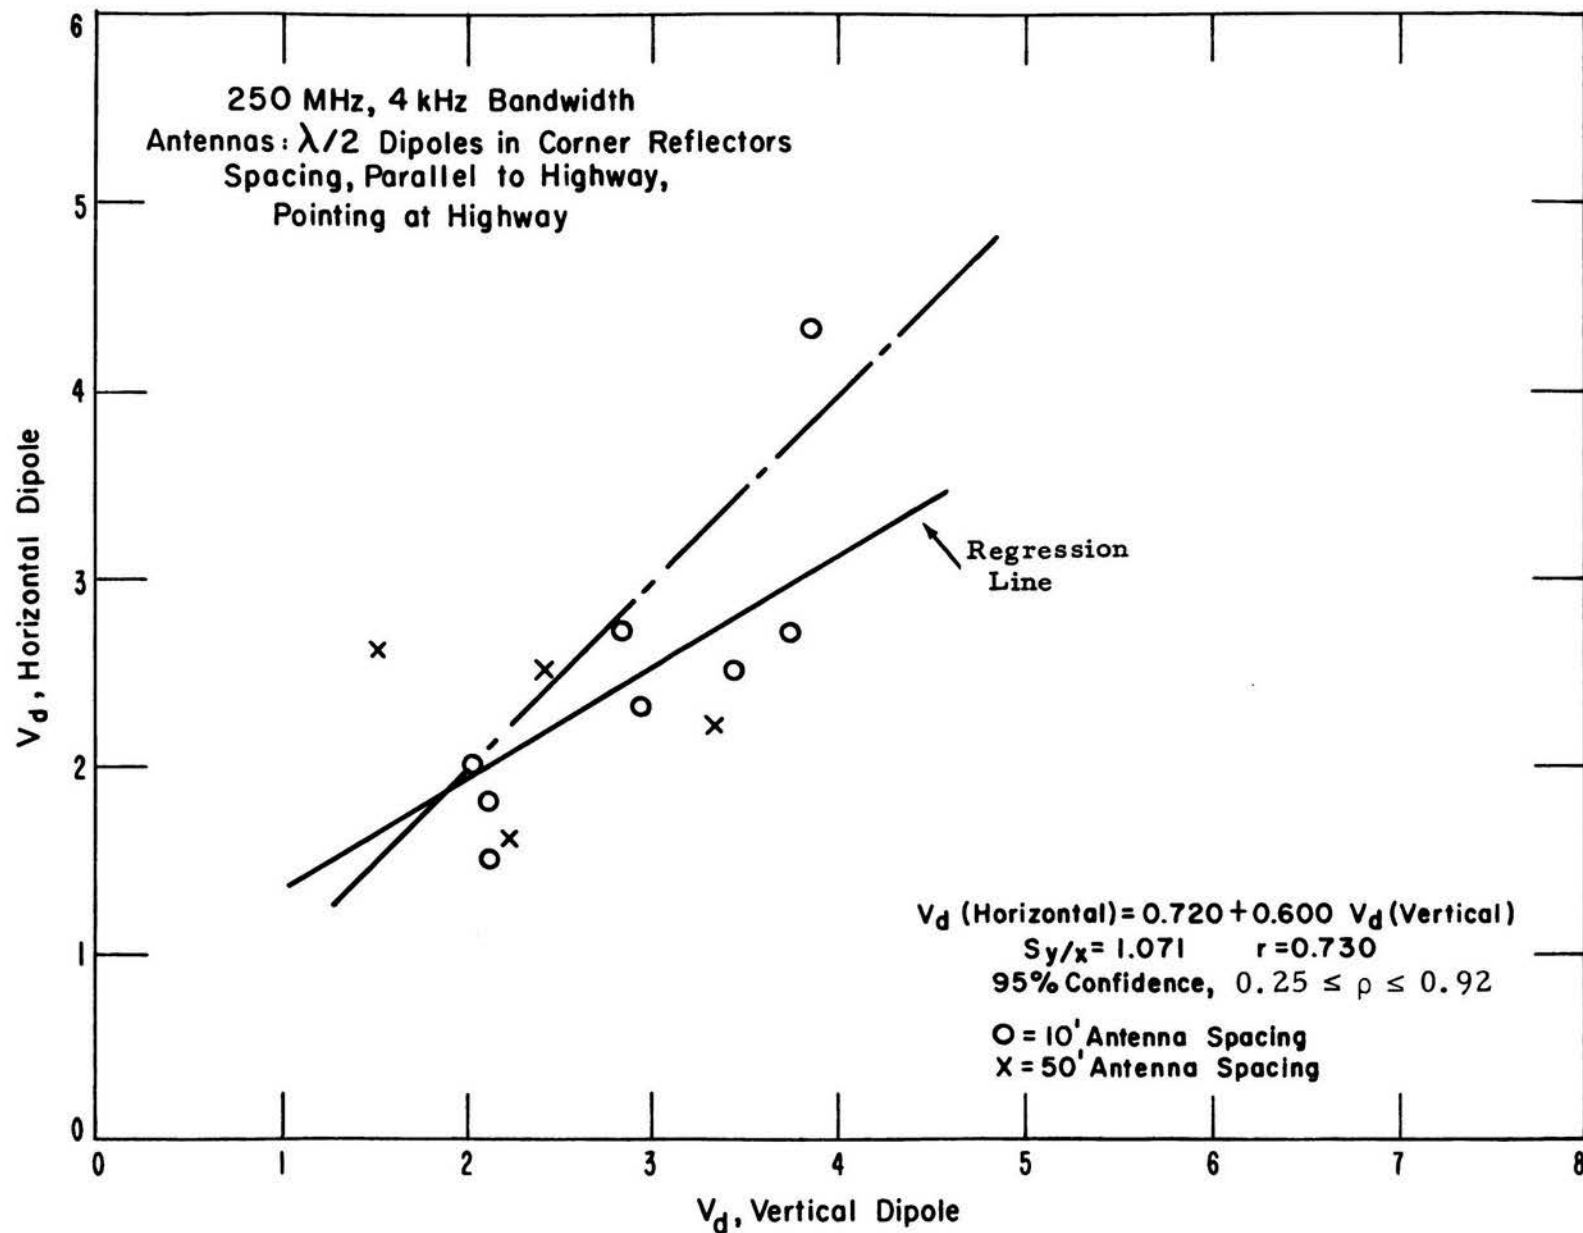


Figure 30. V_d for horizontal component of man-made noise versus V_d for vertical component.

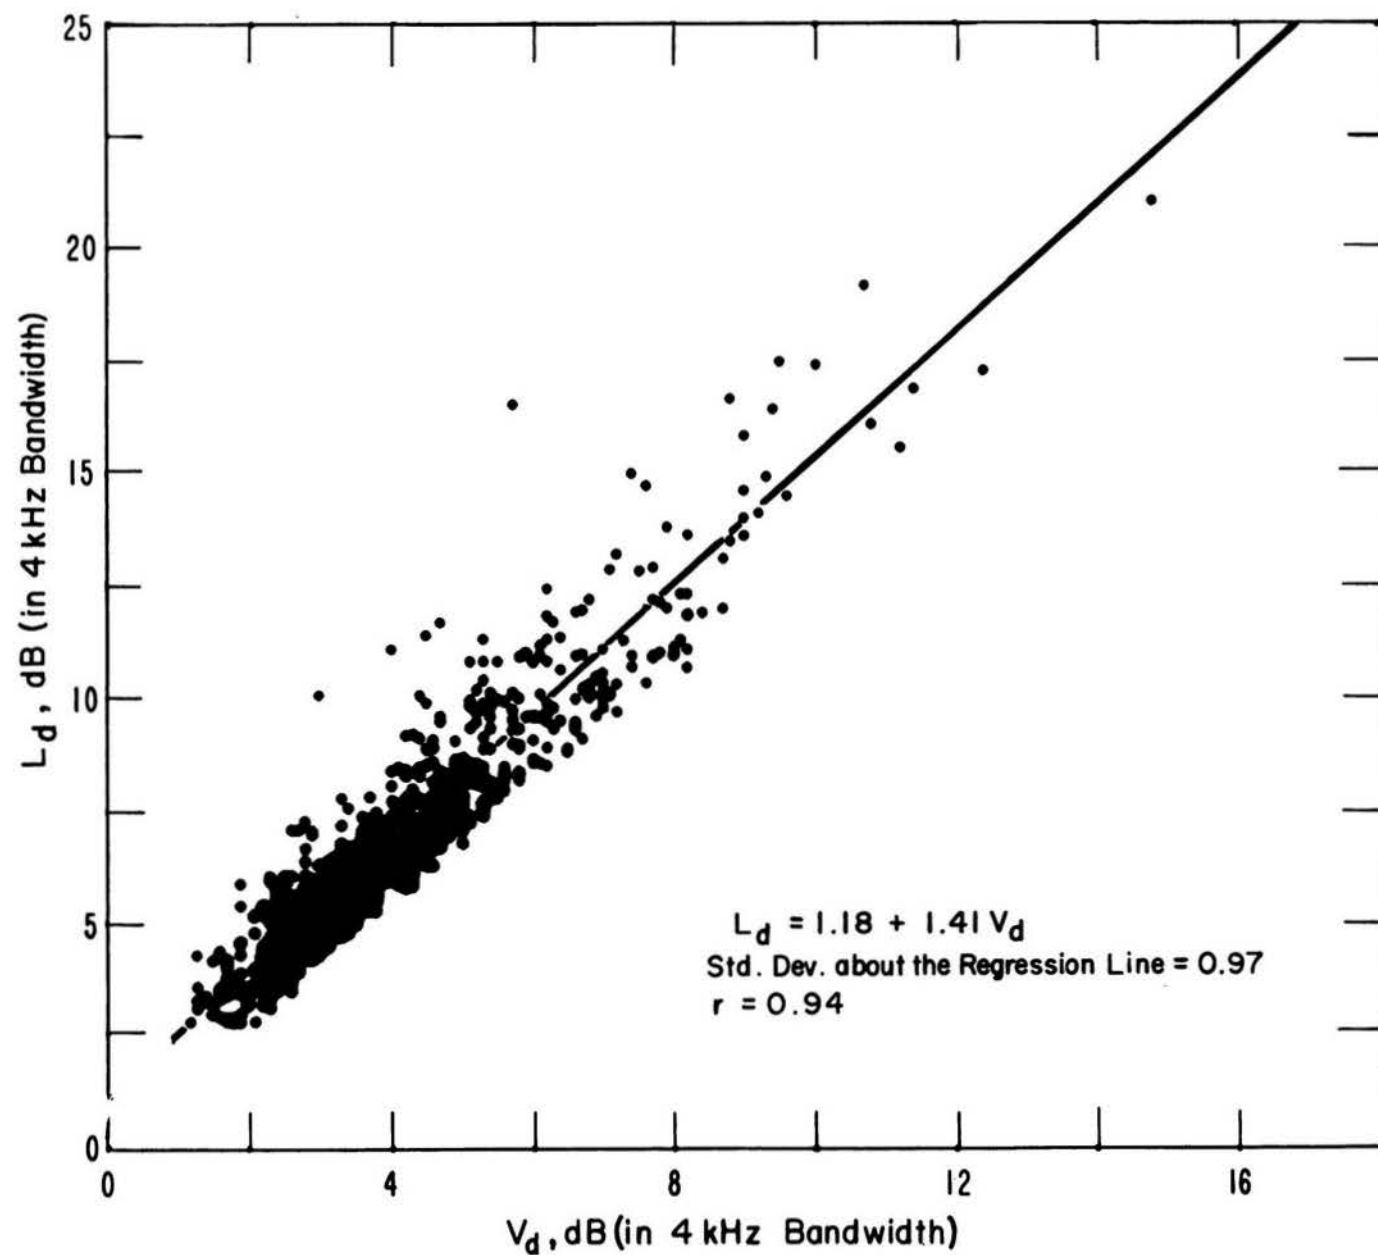


Figure 31. Correlation of V_d and L_d for man-made noise.

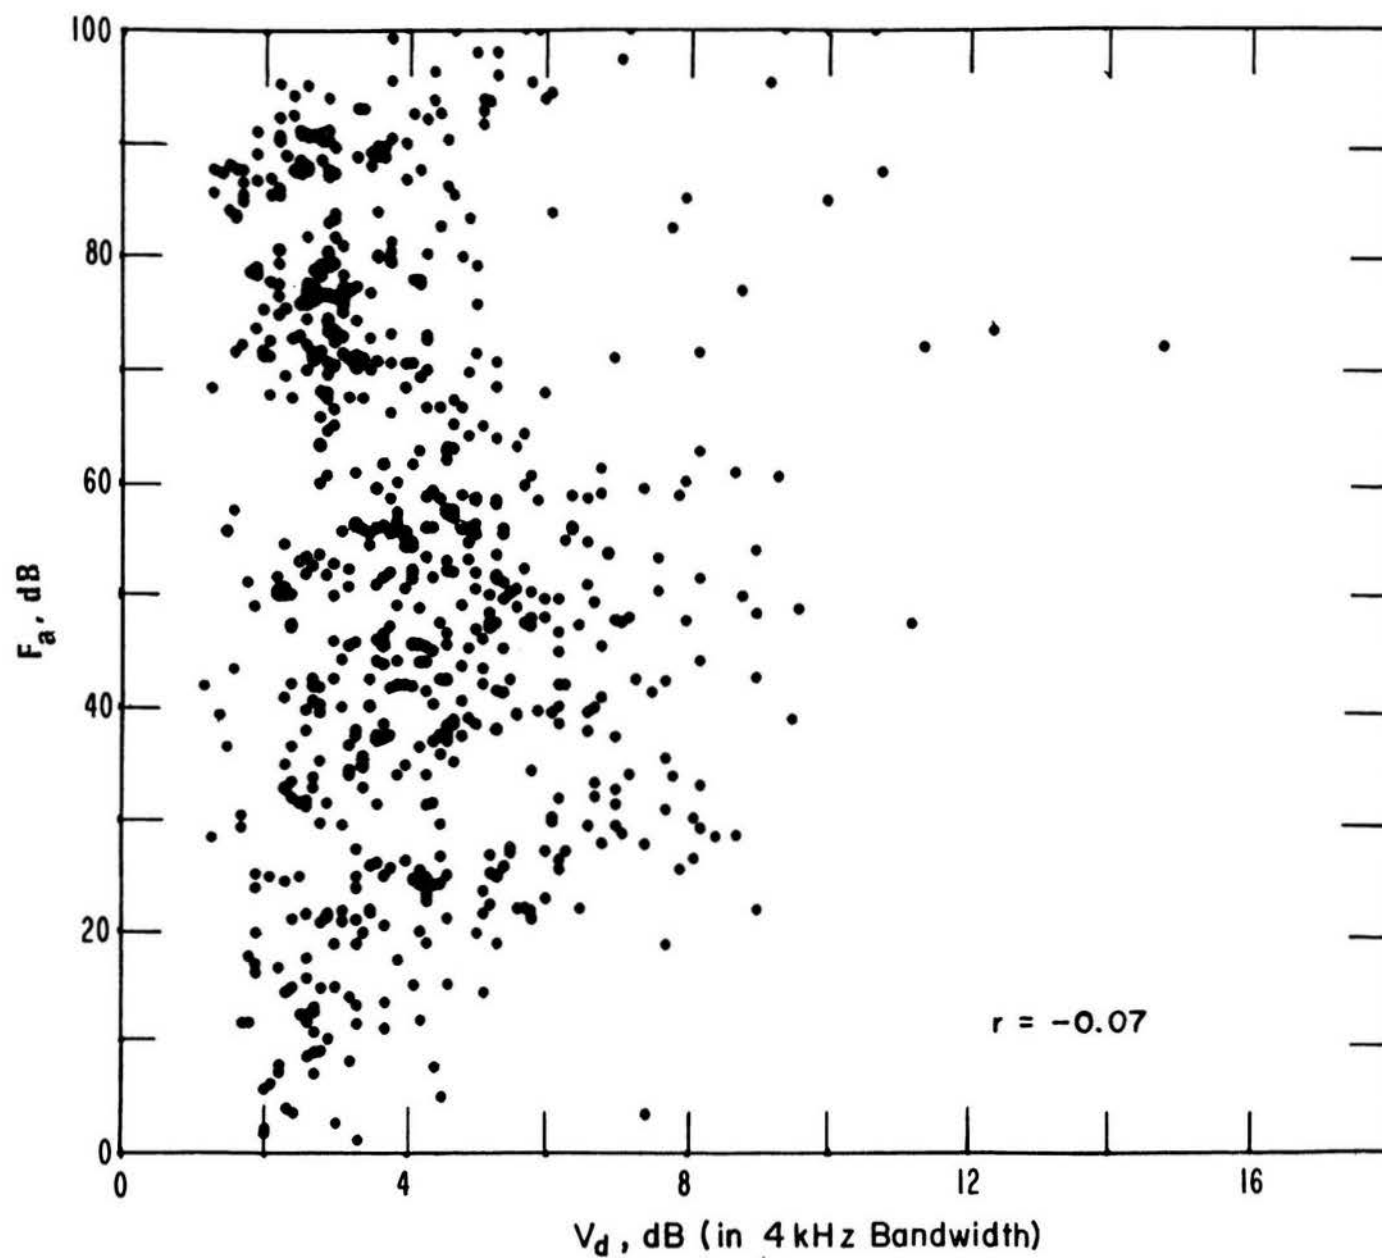


Figure 32. Lack of correlation of F_a and V_d for man-made noise.

4.3 Amplitude and Time Statistics

In order to determine system performance, more detailed statistical information about the received noise waveform is generally required than that given by F_a , V_d , and L_d . Some examples of such detailed statistics of the received waveform are given in this section.

Examples of the noise envelope amplitude probability distribution are given on figures 33-37. The APD's shown are plotted relative to the power moment (in dB relative to the rms envelope voltage). The APD shown in figure 33 was measured in a 4 kHz bandwidth and at a center frequency of 48 MHz. The measurement covered a 5-min period and was made at the intersection of 28th Street and Arapahoe, Boulder, Colorado, during the evening rush hour (1655-1700 LST). The level, because of the high traffic density at the time, is quite high, having been measured at 43.5 dB above kT_0 . This is approximately 1 dB higher than the estimated upper decile value for business areas. The value of V_d for this particular distribution is 5.4 dB. The APD's of the man-made radio noise measured at 102 MHz in a 4 kHz bandwidth at Grand Coulee Dam is shown on figure 34 and at Boulder, Colorado, on 30th Street between Walnut and Peak on figure 35. An APD measured in a rural area in the state of Washington is shown on figure 36. The absence of any nearby, high noise source precludes the occurrence of the very high noise spikes even at the 0.0001 percent point. The range of APD's given here for business areas (figs. 34 and 35) to rural (fig. 36) can be considered typical for this frequency and bandwidth.

The distributions measured along interstate 80 as shown on figure 37 exhibits considerably greater dynamic range than any of the other APD's shown. This principally is caused by the low rural background noise level with the high noise impulses from the traffic on the highway superimposed. This APD was measured at 48 MHz using a 10 kHz

bandwidth. The increase in bandwidth, 4 kHz to 10 kHz, will also increase the dynamic range of the noise envelope voltage.

The APD's are plotted on probability coordinates with an abscissa scale such that a Rayleigh distribution (the envelope distribution for a white Gaussian noise process) plots as a straight line with a slope of $-1/2$. The V_{rms} level of a Rayleigh distribution is approximately at the 36 percent point. A Rayleigh envelope distribution for Gaussian noise is also shown on figure 33. Note that the lower amplitude, higher percentage portions of all the APD's are Rayleigh in character. Even the most impulsive noise will be composed of this Gaussian background with the high noise pulses superimposed upon it. Typical APD's and their variations for residential areas for 2.5, 10, 20, and 48 MHz and a 10-kHz bandwidth have been given by Spaulding et al. (1971).

The radio noise generated internal to the receiving system (antenna circuit losses, receiver noise, etc.) is Gaussian in character and will combine with the external noise. For all the distributions shown, the receiving system noise was well below the man-made noise level. That is, the internally generated noise had no effect on the measured distributions.

A number of 6-min analog tape recordings (see Appendix A) of the pre-detection noise process have been made. The recordings were detected (to obtain the noise envelope), digitized, and computer analyzed to obtain detailed envelope statistics.

Two examples of the analysis of these analog recordings are shown on figures 38-43 and figures 44-51. The first example is for a noise sample recorded in a 4 kHz bandwidth at 250 MHz. The recording was made in a business area in Colorado Springs, Colorado, June 5, 1970, 0857-0903 MST. A randomly selected 200 msec portion of the digitized envelope is shown on figure 38, while figure 39 shows the autocovariance for this 200 msec sample. Note that for short periods of time ($\tau < 100$ msec)

the noise appears to be uncorrelated. This is generally, but not always, the case. The APD for this 6-min recording is shown on figure 40. Also shown by the dashed Rayleigh distribution on figure 40 is the system (receiving, recording, playback, and digitizing) noise level. The average crossing rate characteristic (ACR) is shown on figure 41, while figures 42 and 43 show the pulse duration distributions (PDD) and the pulse spacing distributions (PSD), respectively.

The second example, also in a 4 kHz bandwidth, was recorded at 48 MHz in a Denver, Colorado, residential area. Two randomly selected 200 msec sample of the digitized envelope are shown on figures 44 and 46, and figures 45 and 47 give the corresponding autocovariance functions. Note the low level CW signal present on the second sample (figs. 46 and 47). The APD, ACR, PDD's, PSD's, for the 6-min recording are given on figures 48, 49, 50, and 51, respectively.

The average crossing rate, ACR, is the average number of positive crossings of given levels by the noise envelope. At the higher levels, a positive crossing of a level can be considered to correspond to the occurrence at the receiver input of a noise pulse of amplitude greater than that level. The maximum number of positive crossings depends on the receiver bandpass and noise characteristics. Additional ACR measurements have been given by ACLMRS (1966).

The pulse duration is the time that the noise pulse is above a particular envelope voltage level. That is, at a given level, it is the time between the positive crossing of the level and the next negative crossing. The curves on figures 42 and 50 show the percent (probability $\times 100$) of pulses whose durations at the indicated level are equal to or greater than the time indicated by the ordinate.

The pulse spacing is the time from a negative crossing of a given level by the noise envelope to the next positive crossing of that level. The curves on figures 43 and 51 show the distribution of these times

for various levels. If man-made noise was composed of pulses occurring randomly according to a Poisson distribution, the pulse spacing distributions would be exponential at the higher envelope levels. An exponential distribution plots as a straight line of slope -1 on the coordinates used for figures 42, 43, 50, and 51. As can be seen from figures 43 and 51, the pulse spacing distributions at the higher levels and wider spacings are not exponential. This indicates correlation in the noise process for these longer time periods.

These samples of the various amplitude and time statistics given here are for guidance to provide some insight into the characteristics of the noise process. They are not, however, intended to be estimates of the statistics for all types of man-made radio noise. While these are examples of the statistics that will be found, they are not average values but strictly the results of the analysis of a few samples. The statistics for the various types of man-made radio noise encountered in the environment will vary with time, location, frequency, and the receiving system.

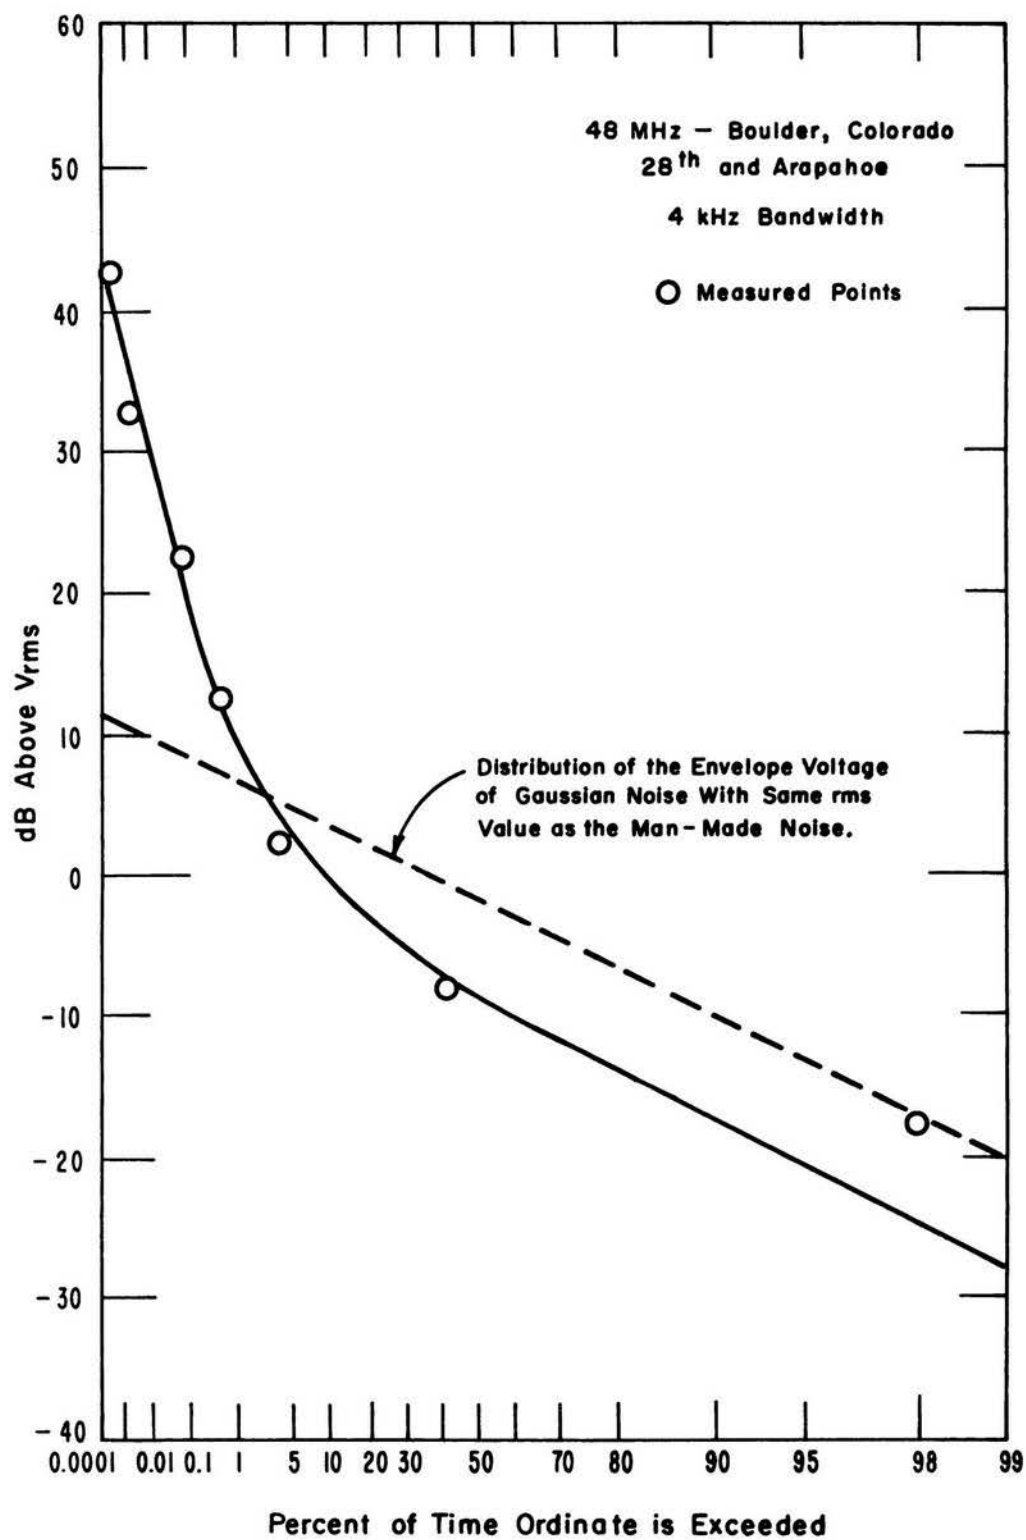


Figure 33. Amplitude probability distribution of envelope of man-made radio noise at 48 MHz.

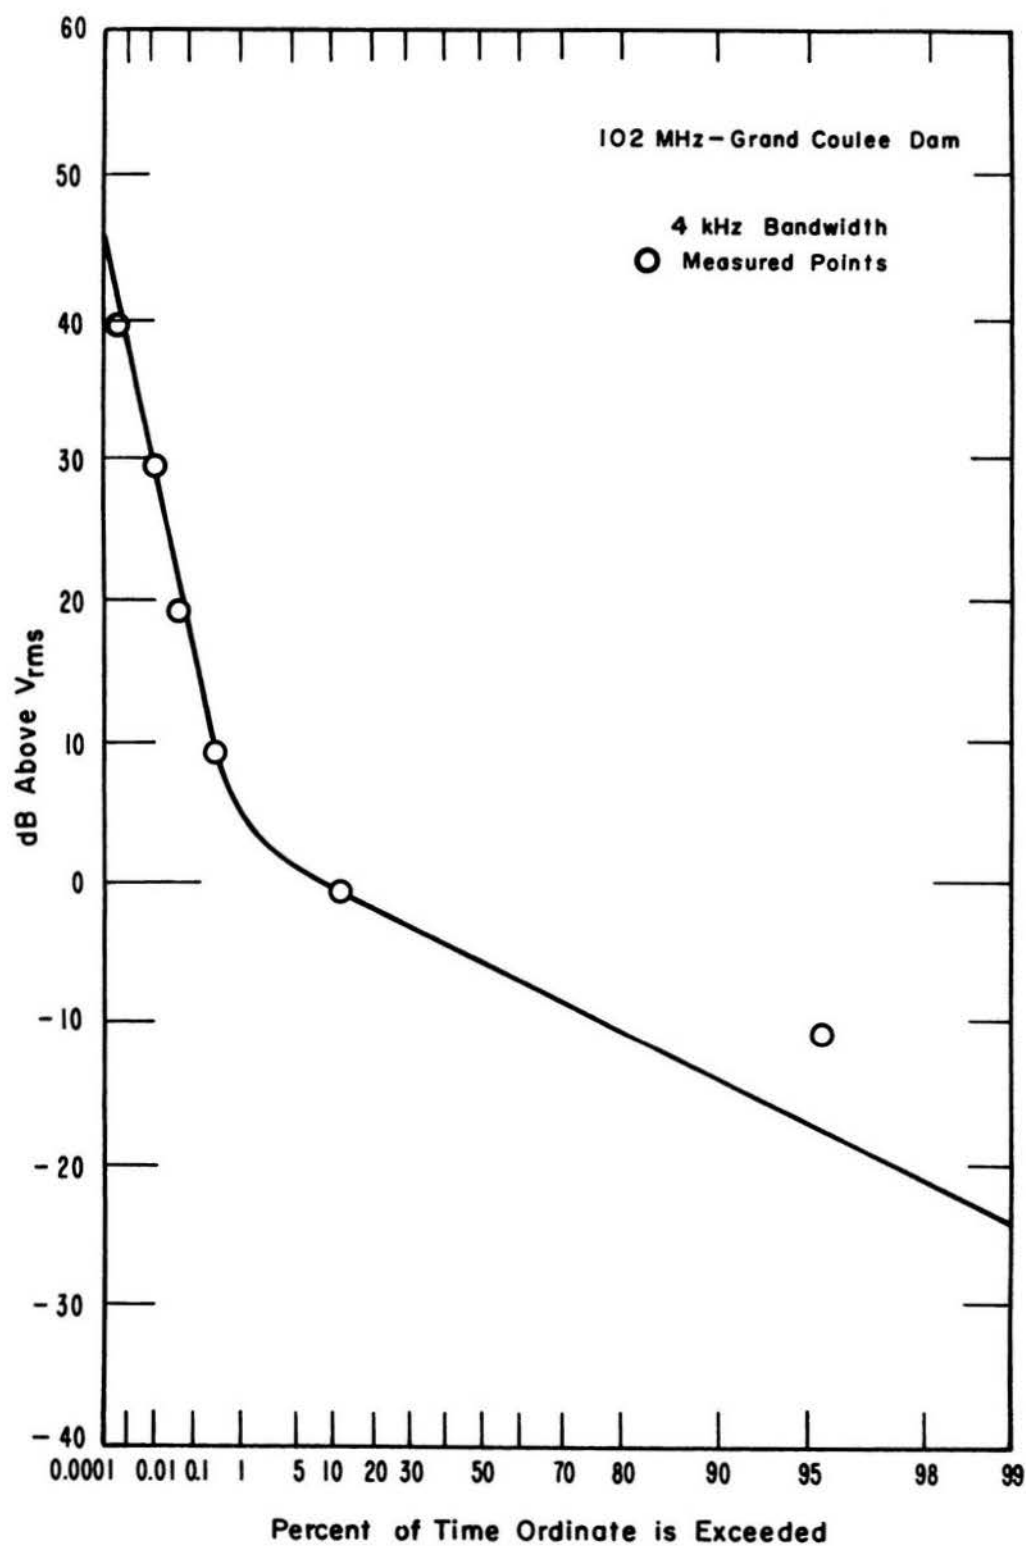


Figure 34. Amplitude probability distribution of man-made noise at 102 MHz.

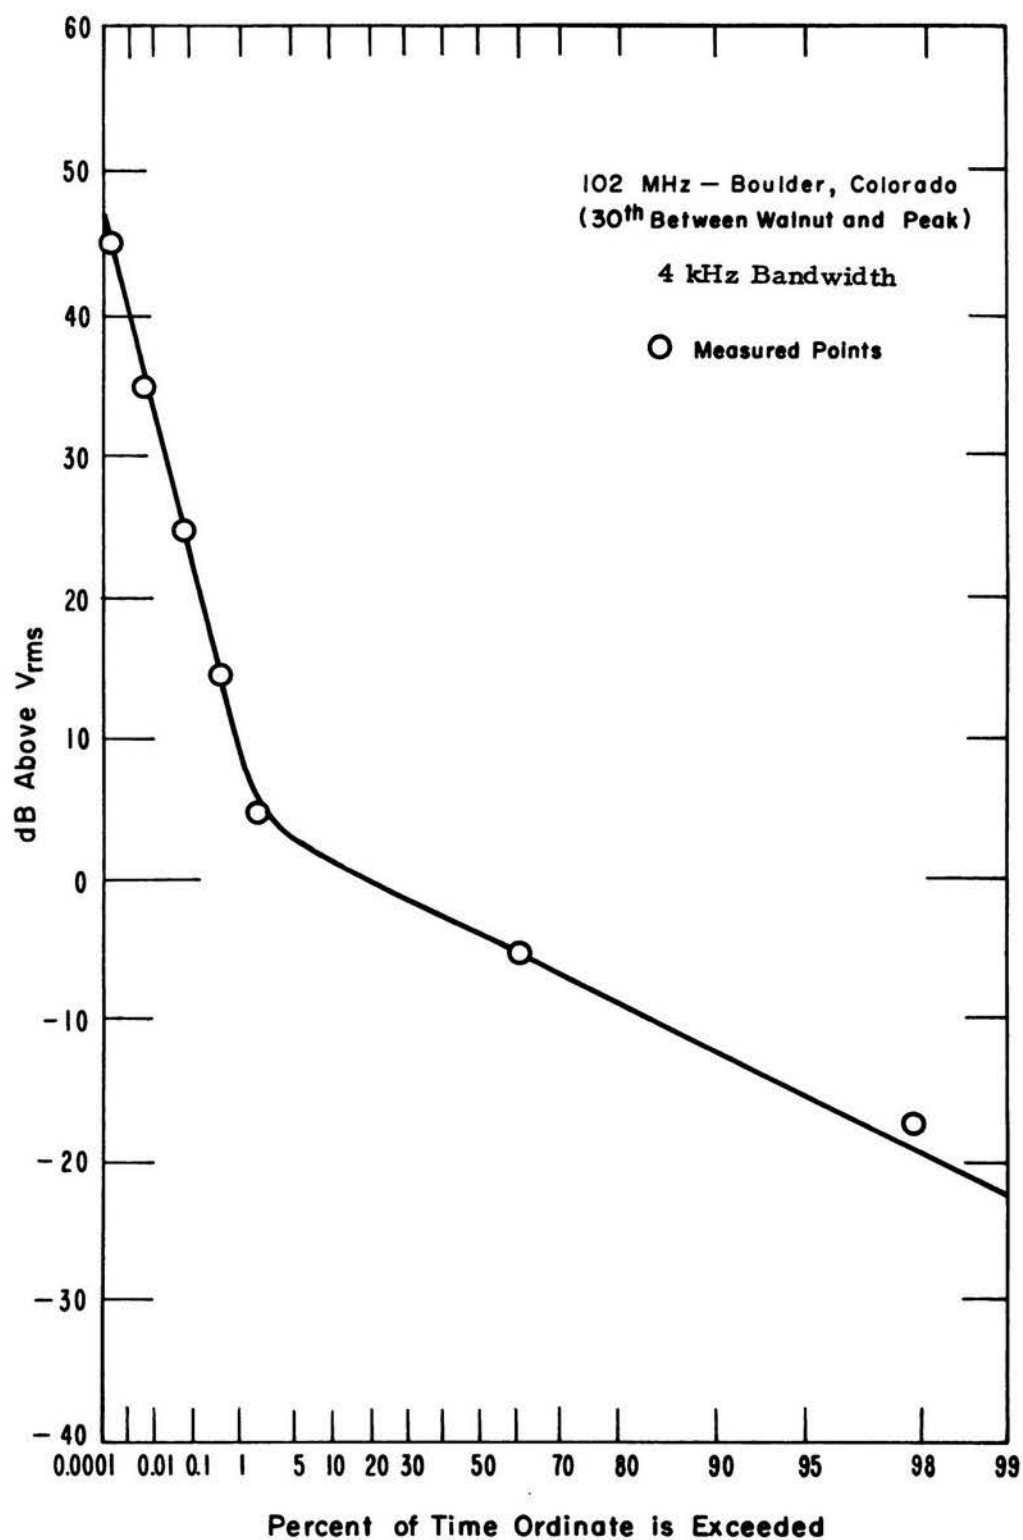


Figure 35. Amplitude probability distribution of man-made noise at 102 MHz.

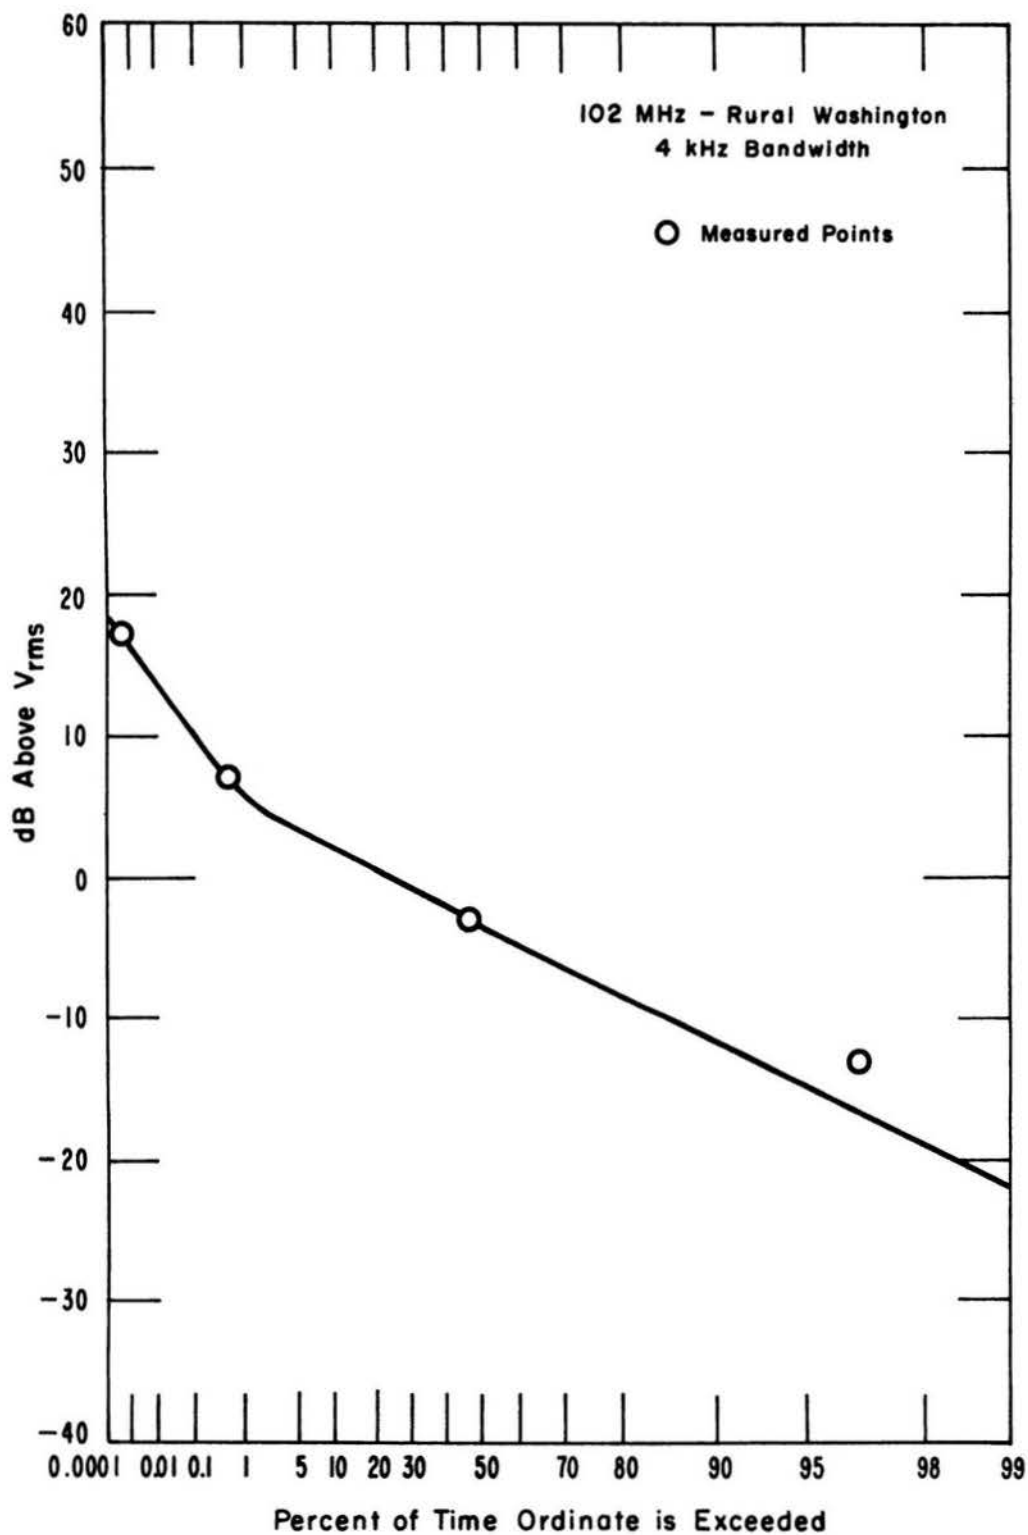


Figure 36. Amplitude probability distribution of man-made noise at 102 MHz.

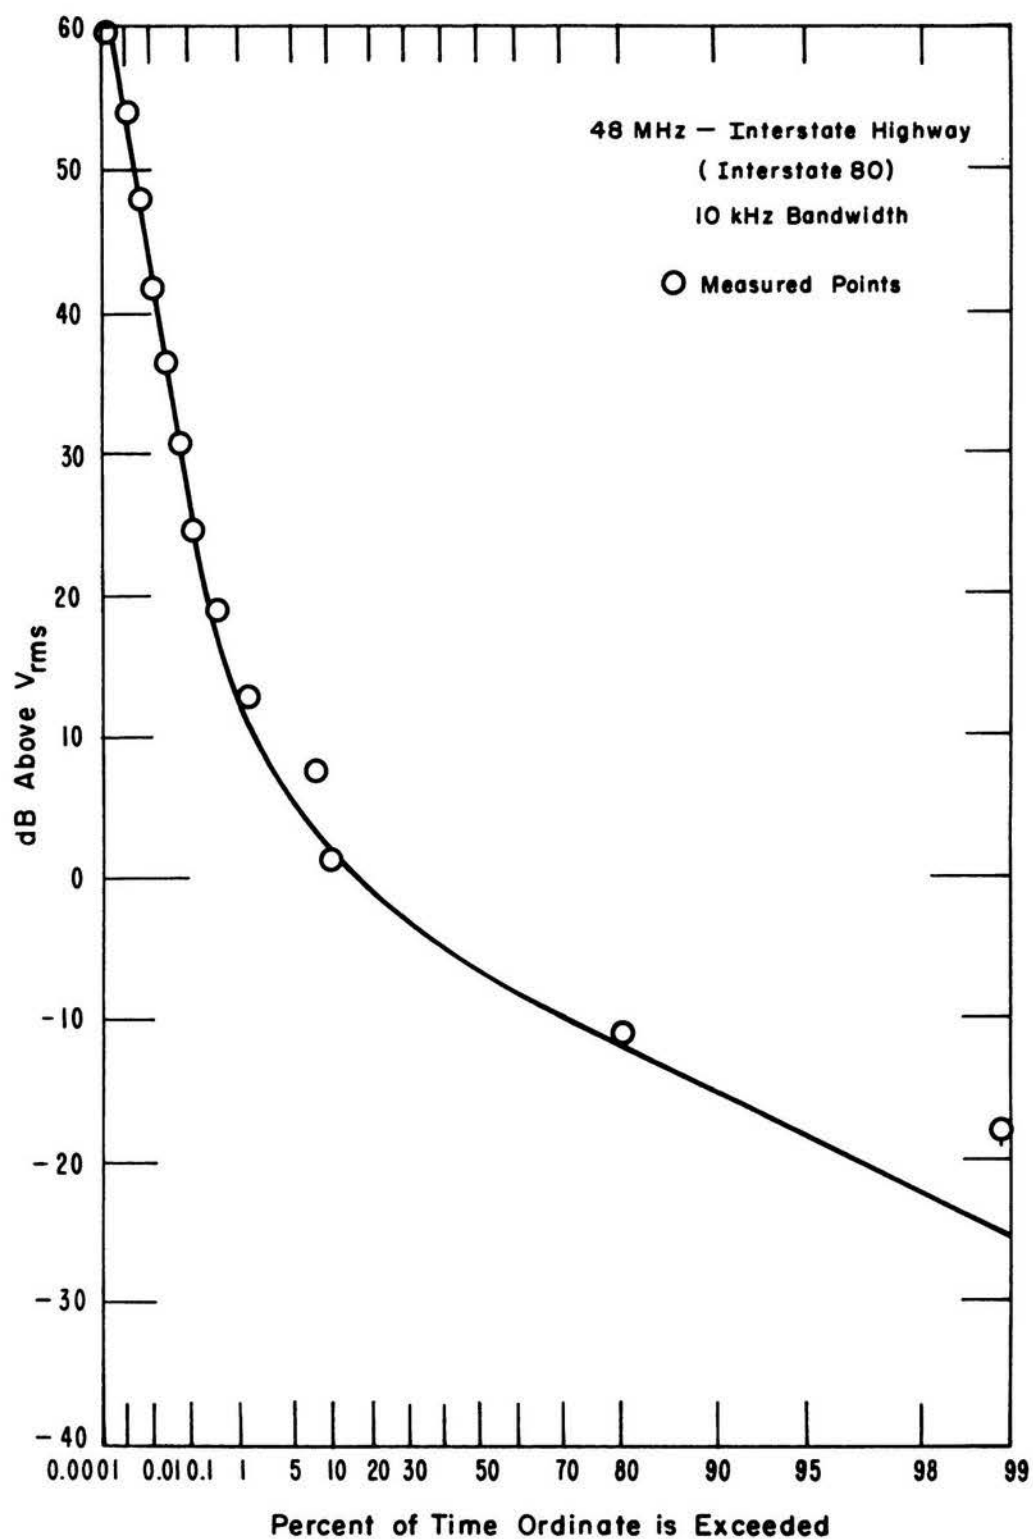


Figure 37. Amplitude probability distribution of man-made noise at 48 MHz, 10 kHz bandwidth.

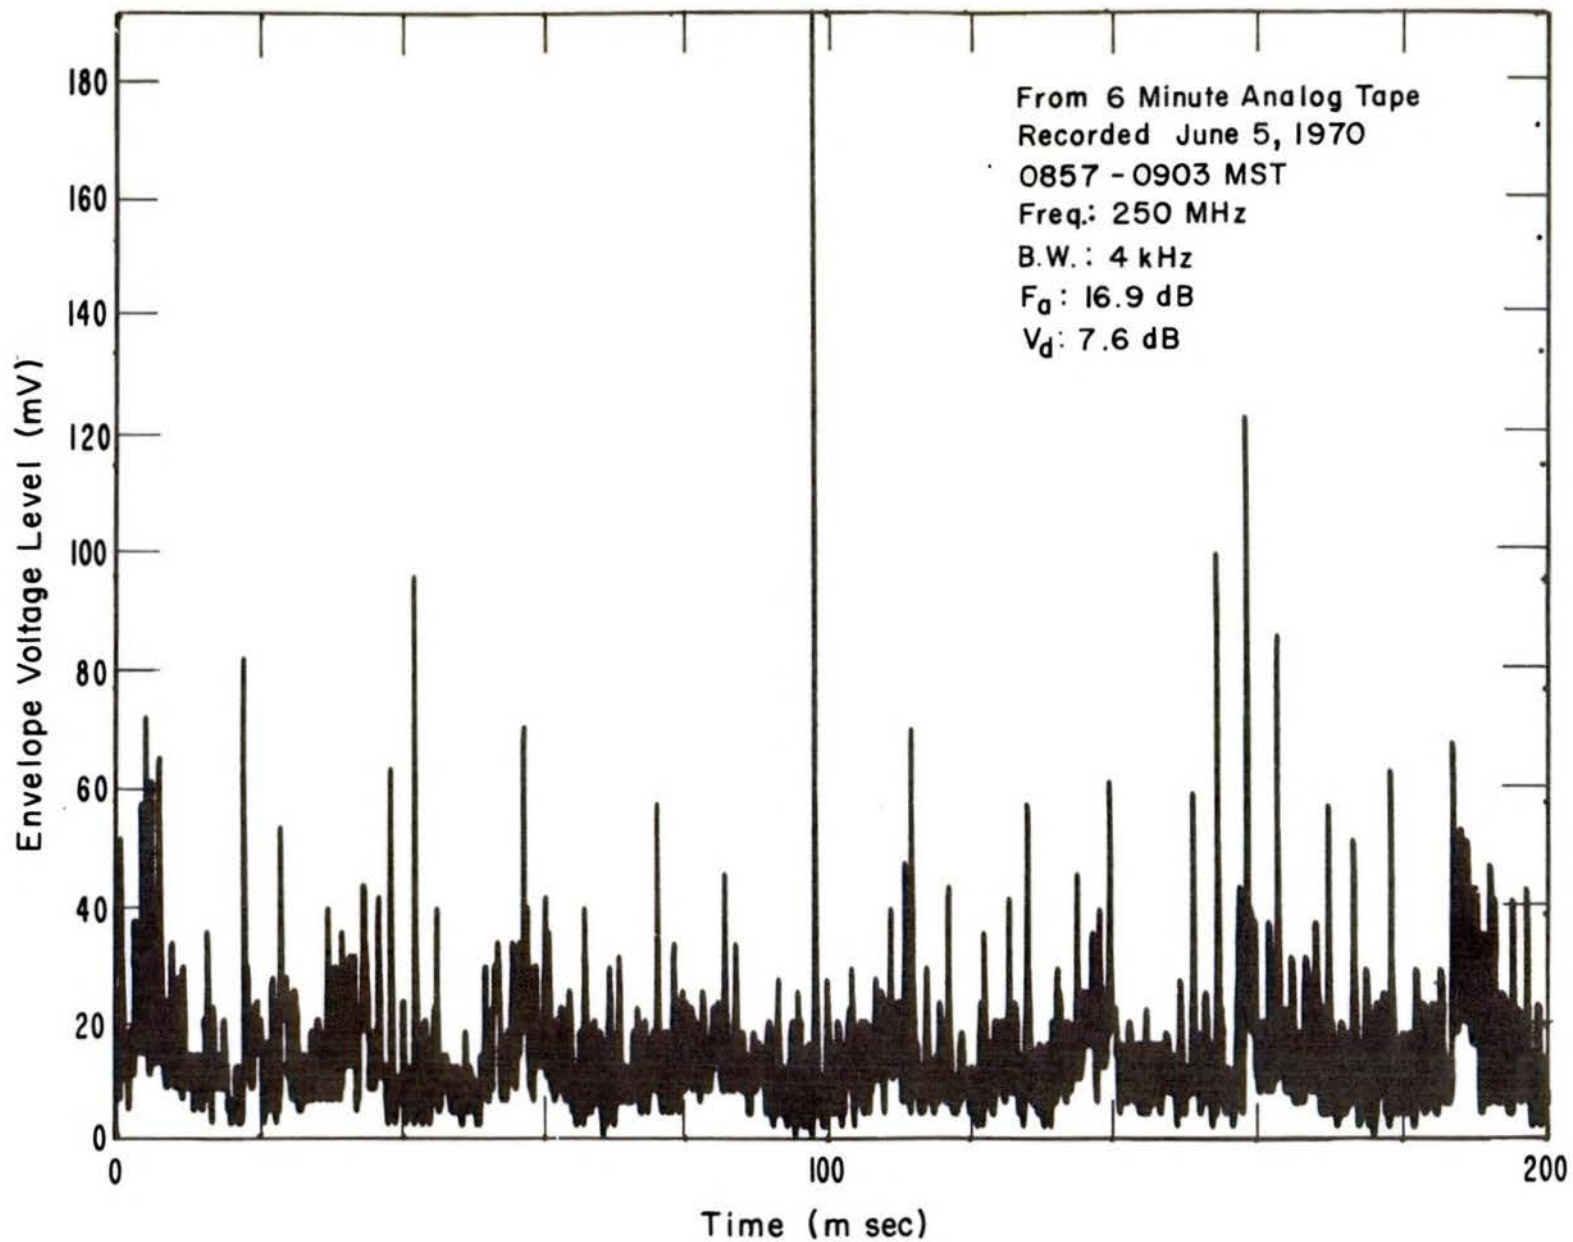


Figure 38. Randomly selected 200 ms sample of noise envelope from a 6-minute, 250 MHz central Colorado Springs recording.

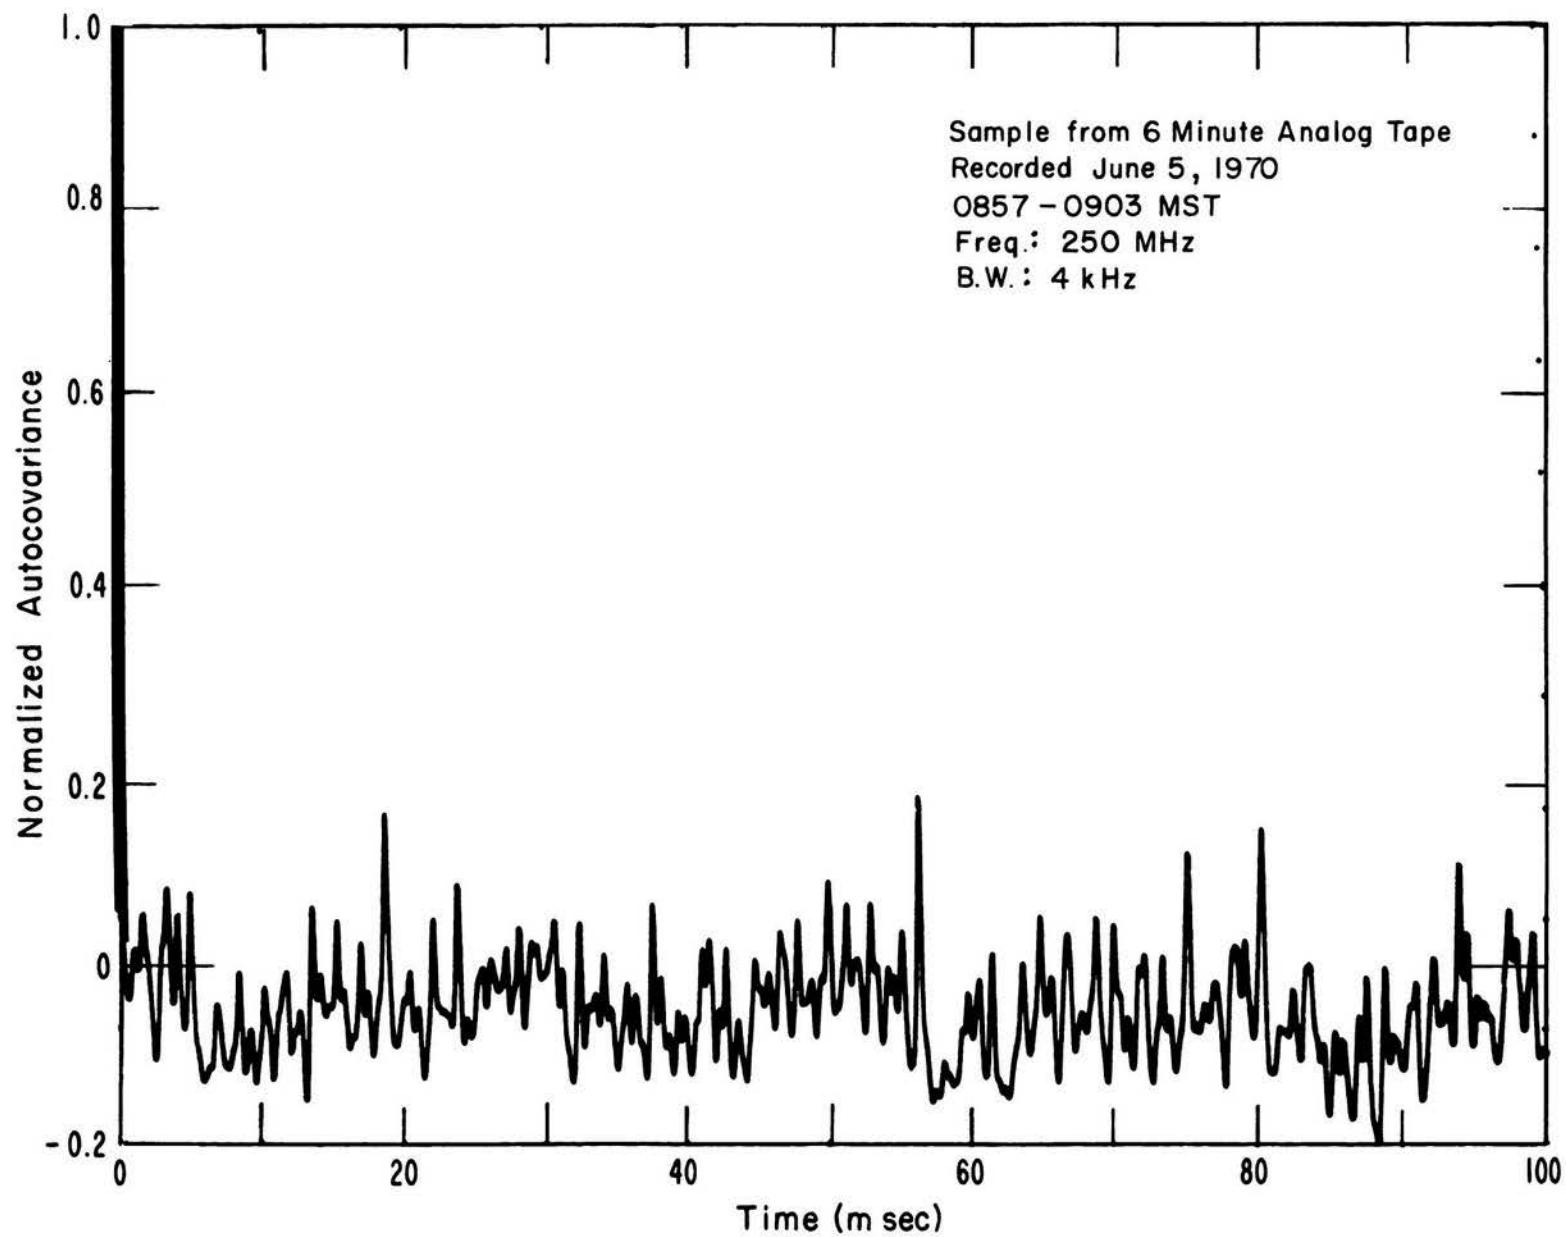


Figure 39. Normalized autocovariance for the noise sample of figure 38.

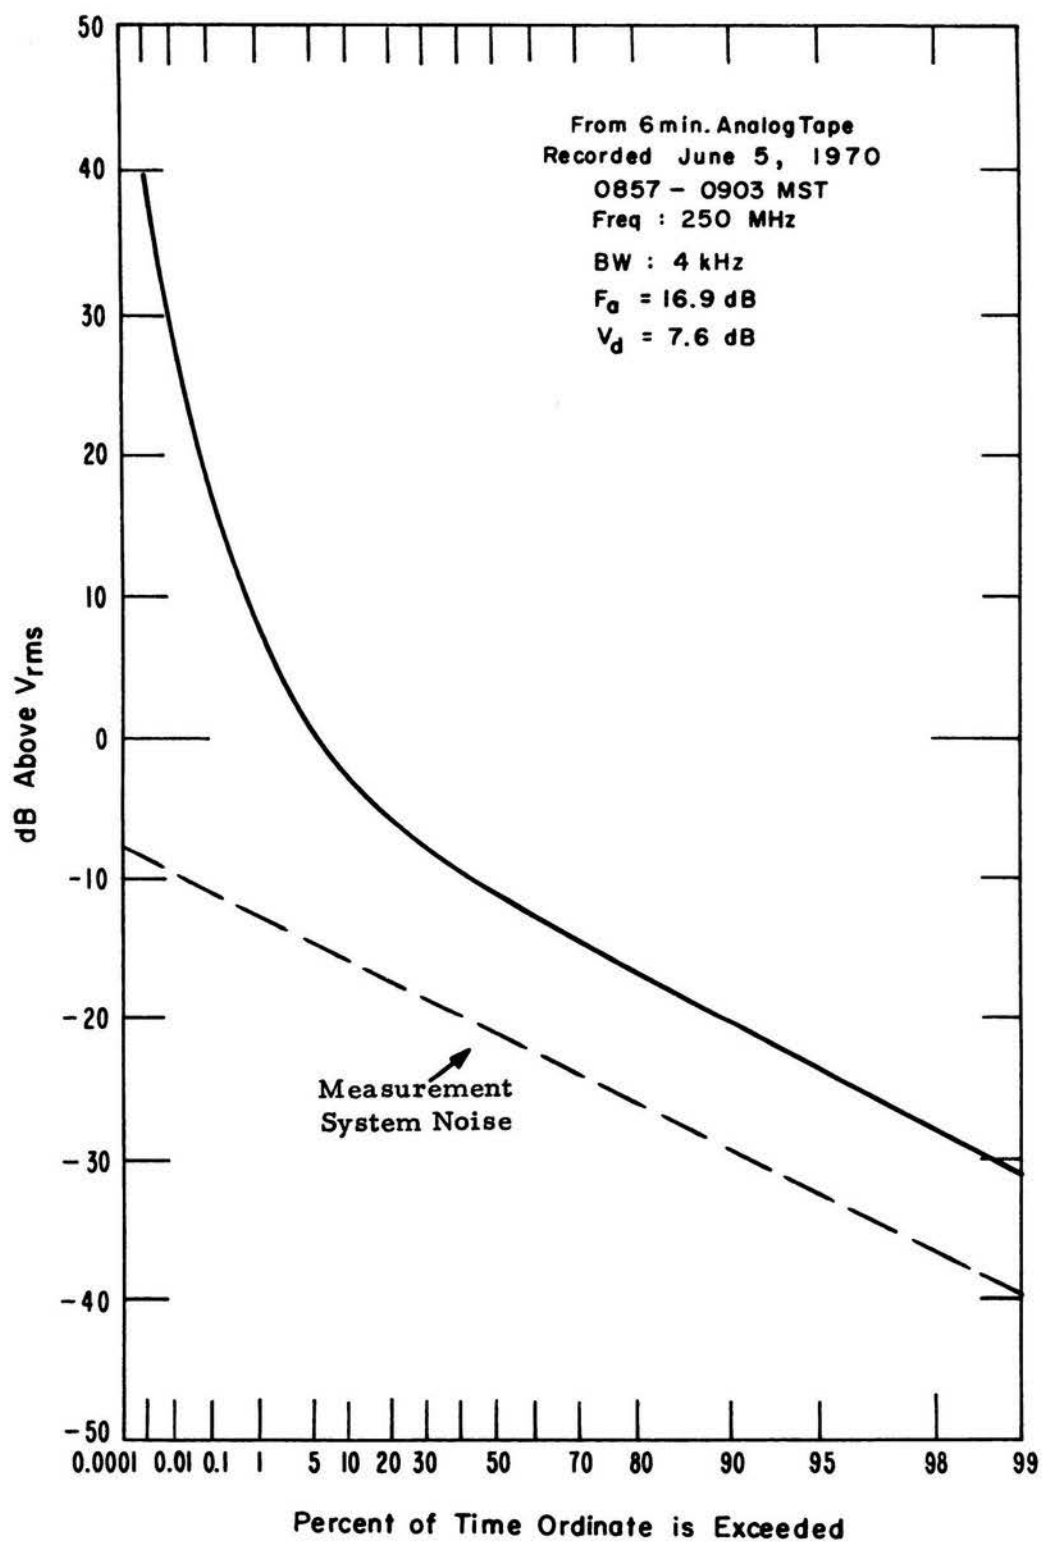


Figure 40. Amplitude probability distribution for a 6-minute sample of noise recorded in central Colorado Springs.

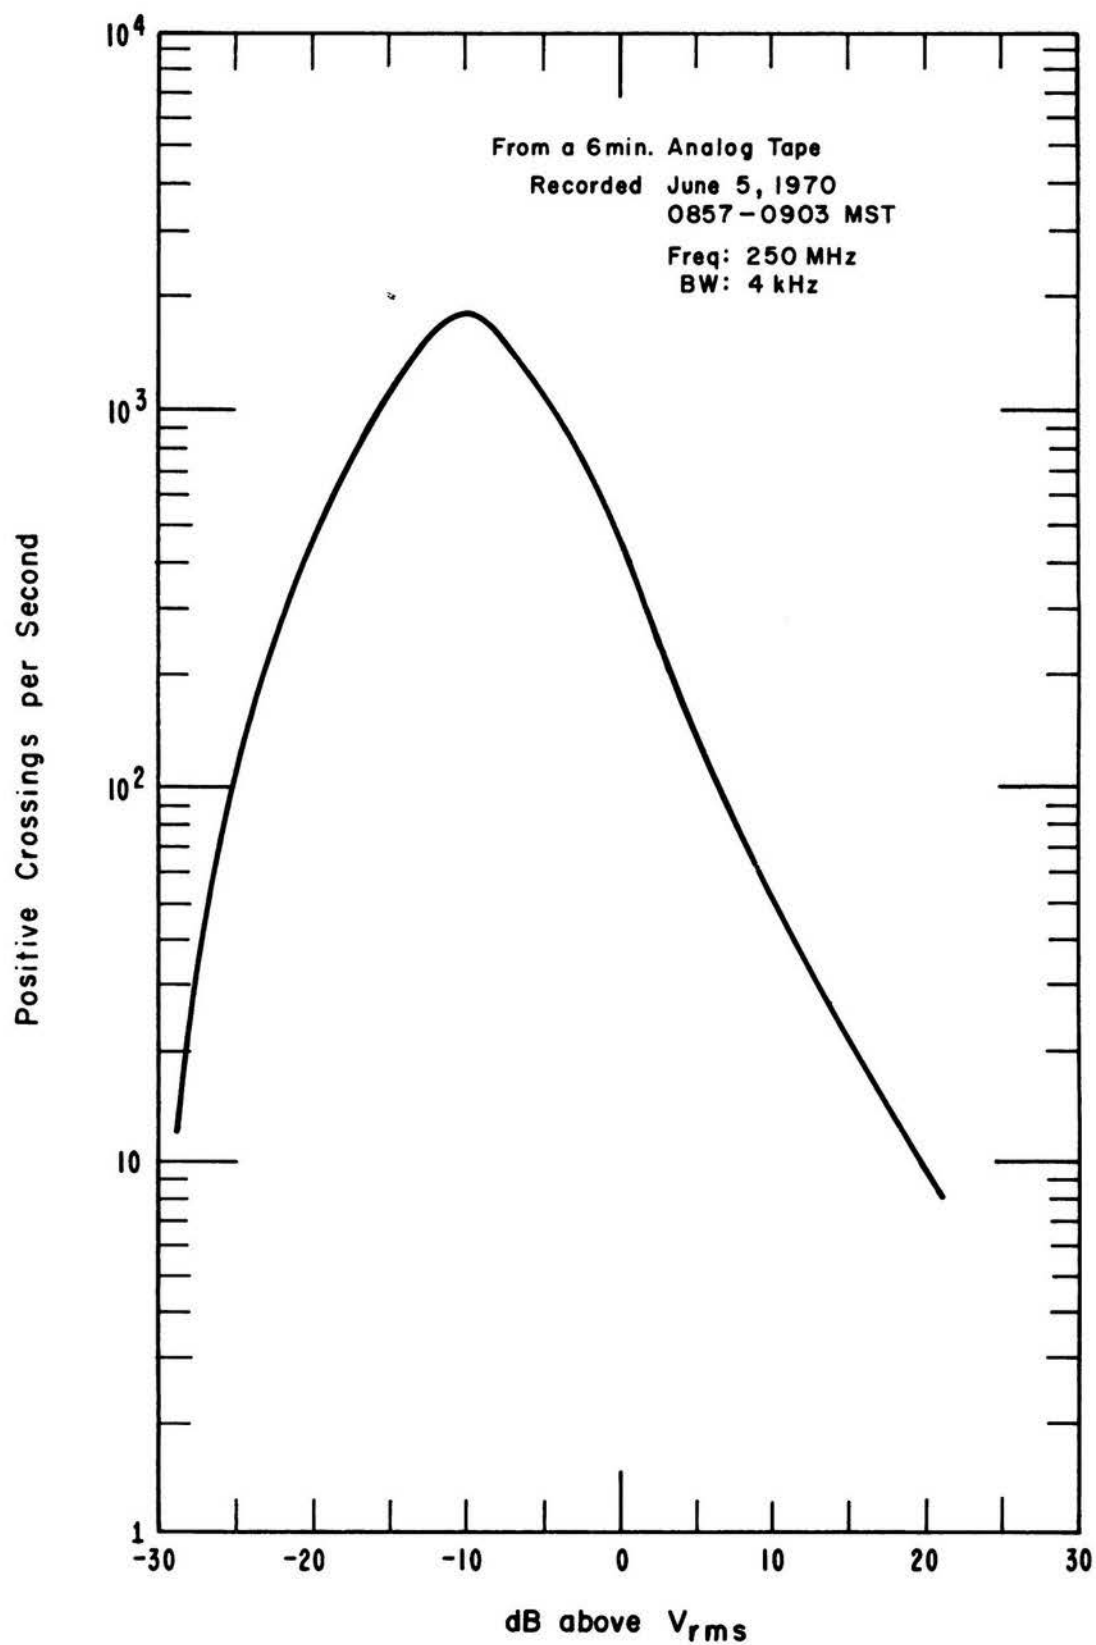


Figure 41. Average positive crossing rate characteristic for the sample of noise of figure 40.

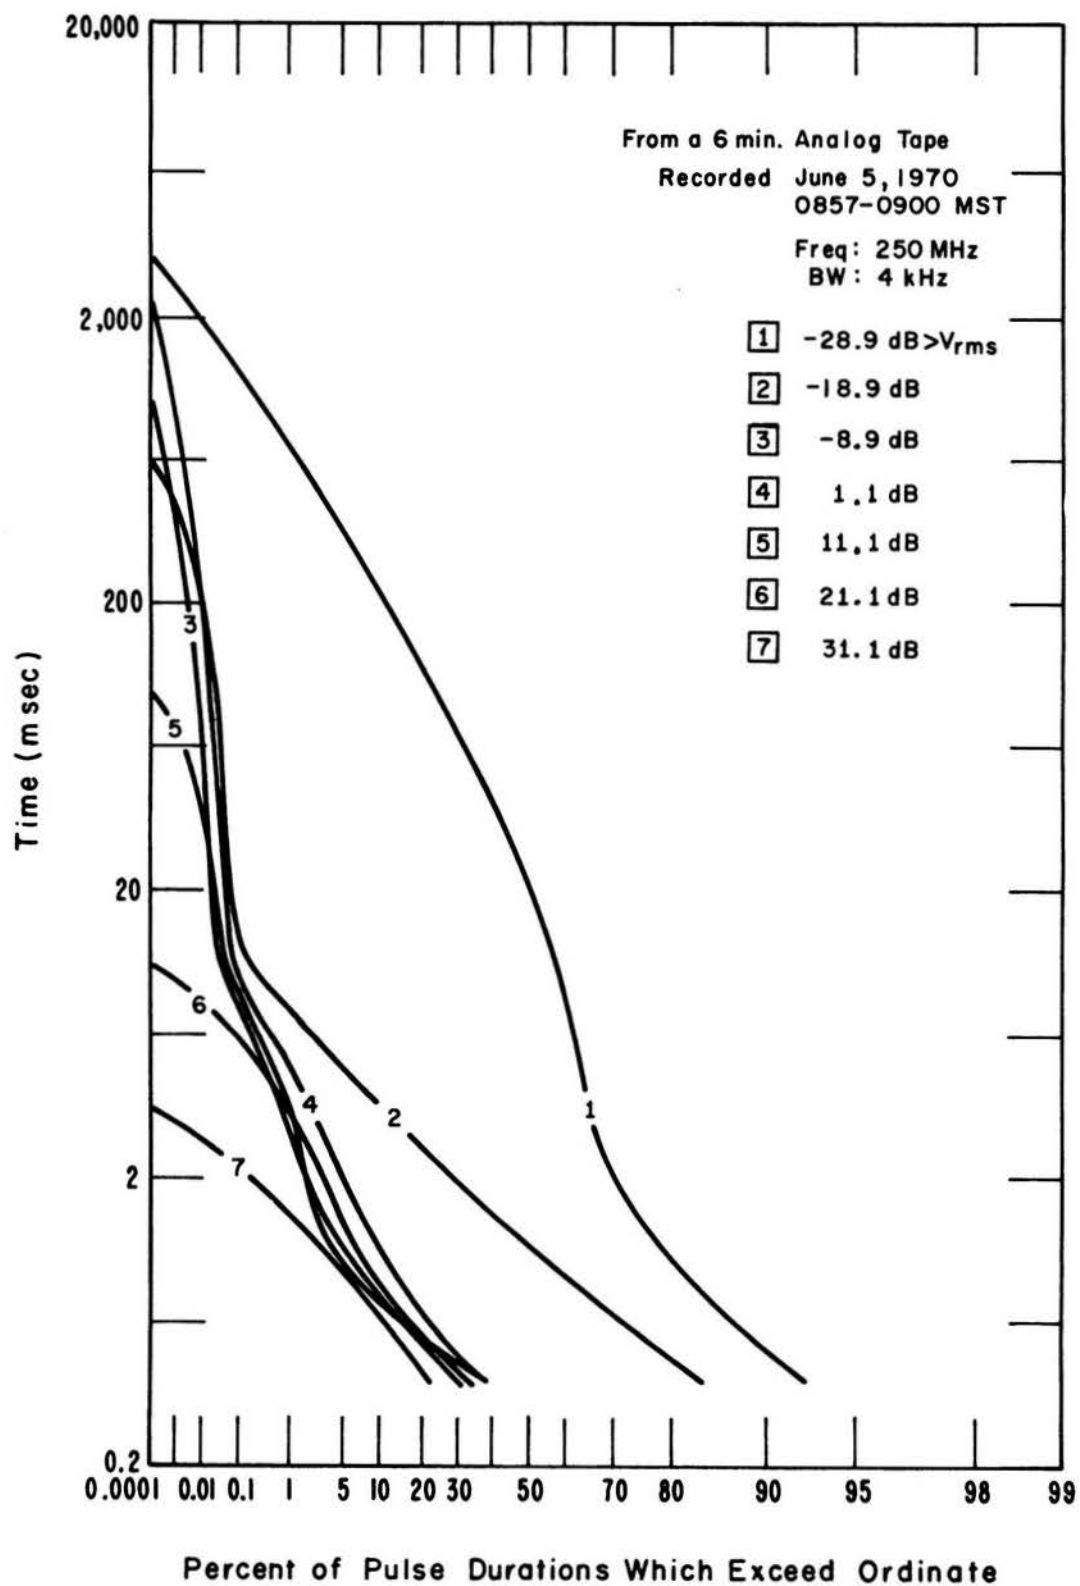


Figure 42. Pulse duration distributions for the sample of noise of figure 40.

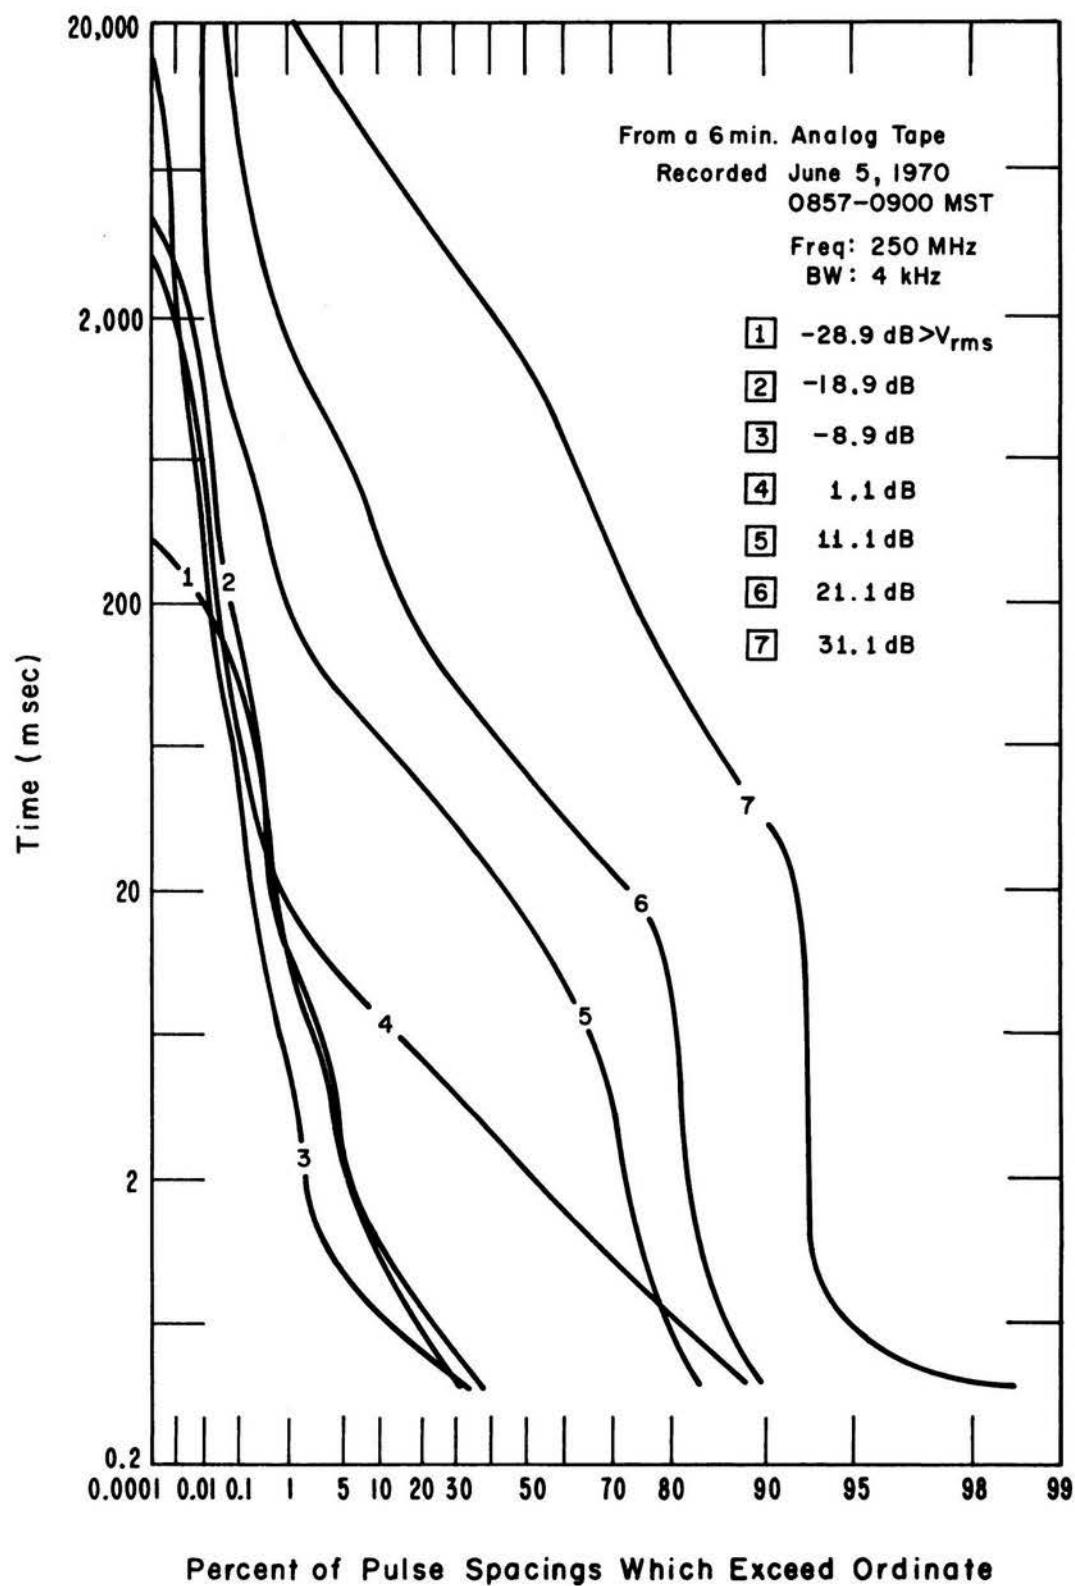


Figure 43. Pulse spacing distributions for the sample of noise of figure 40.

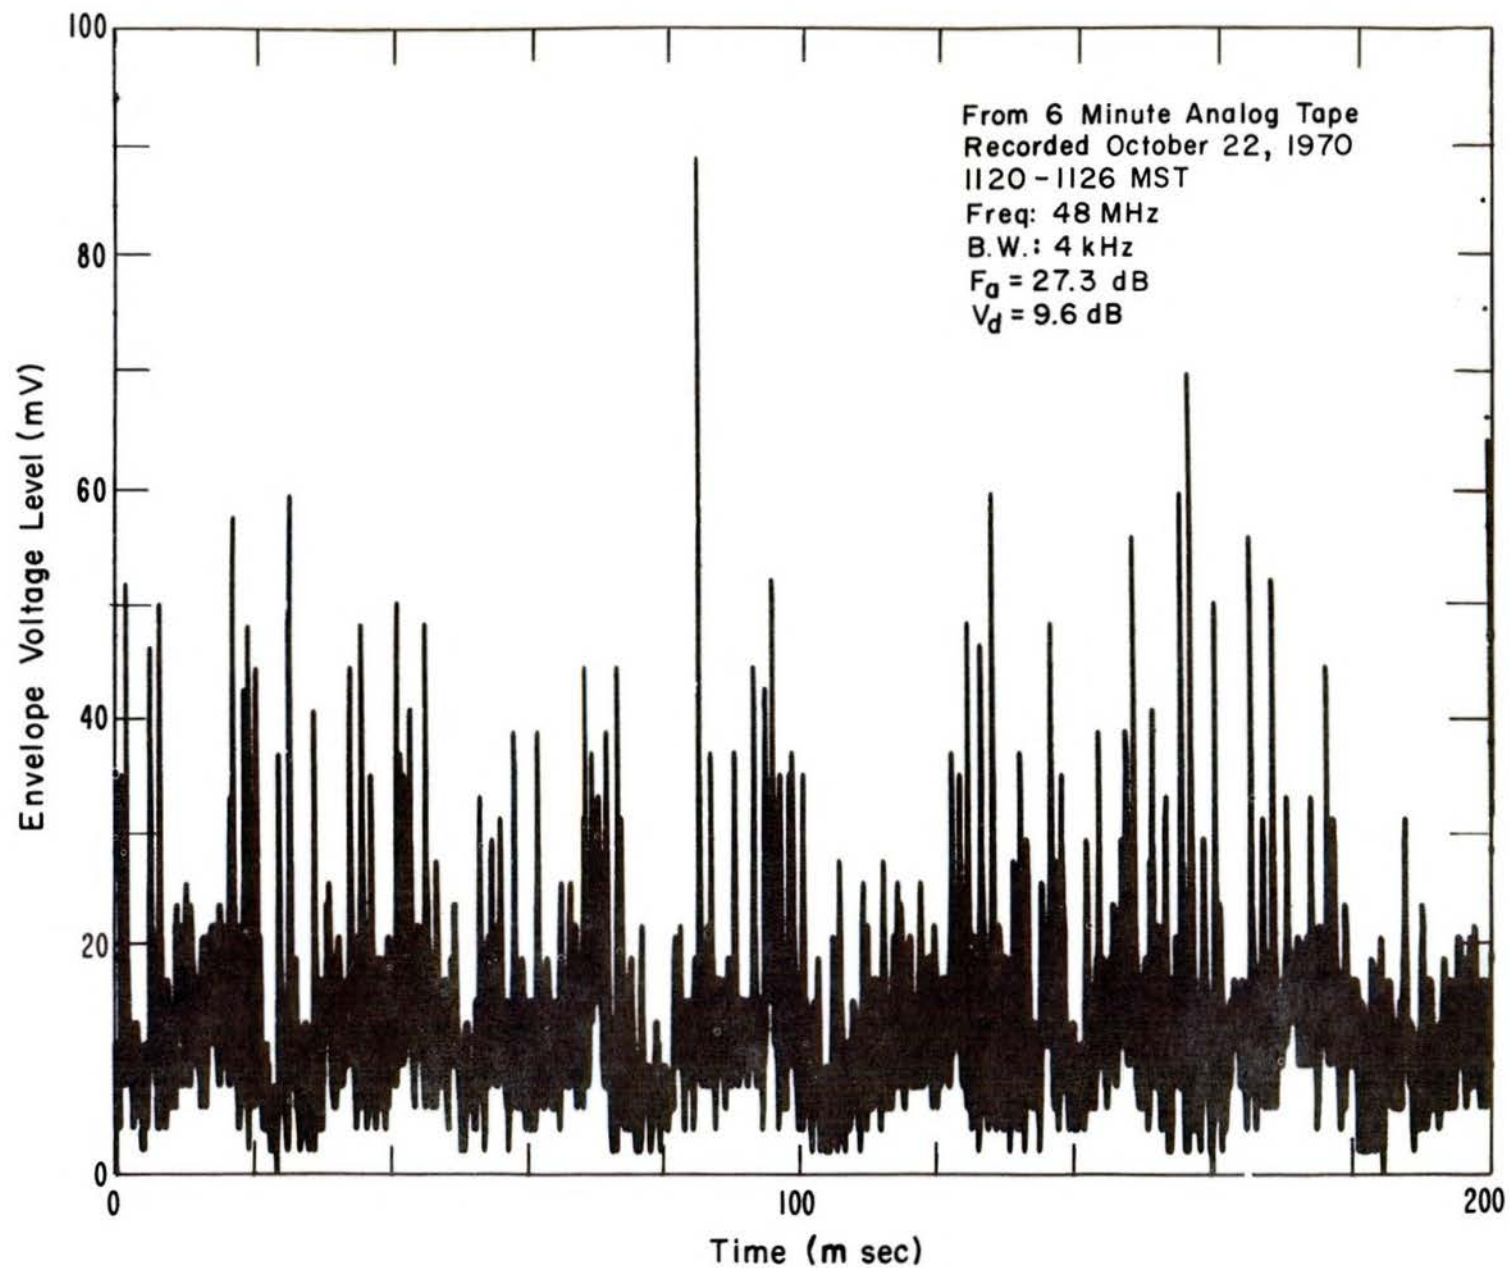


Figure 44. Randomly selected 200 ms sample of noise envelope from a 6-minute, 48 MHz, Denver, Colorado, residential area.

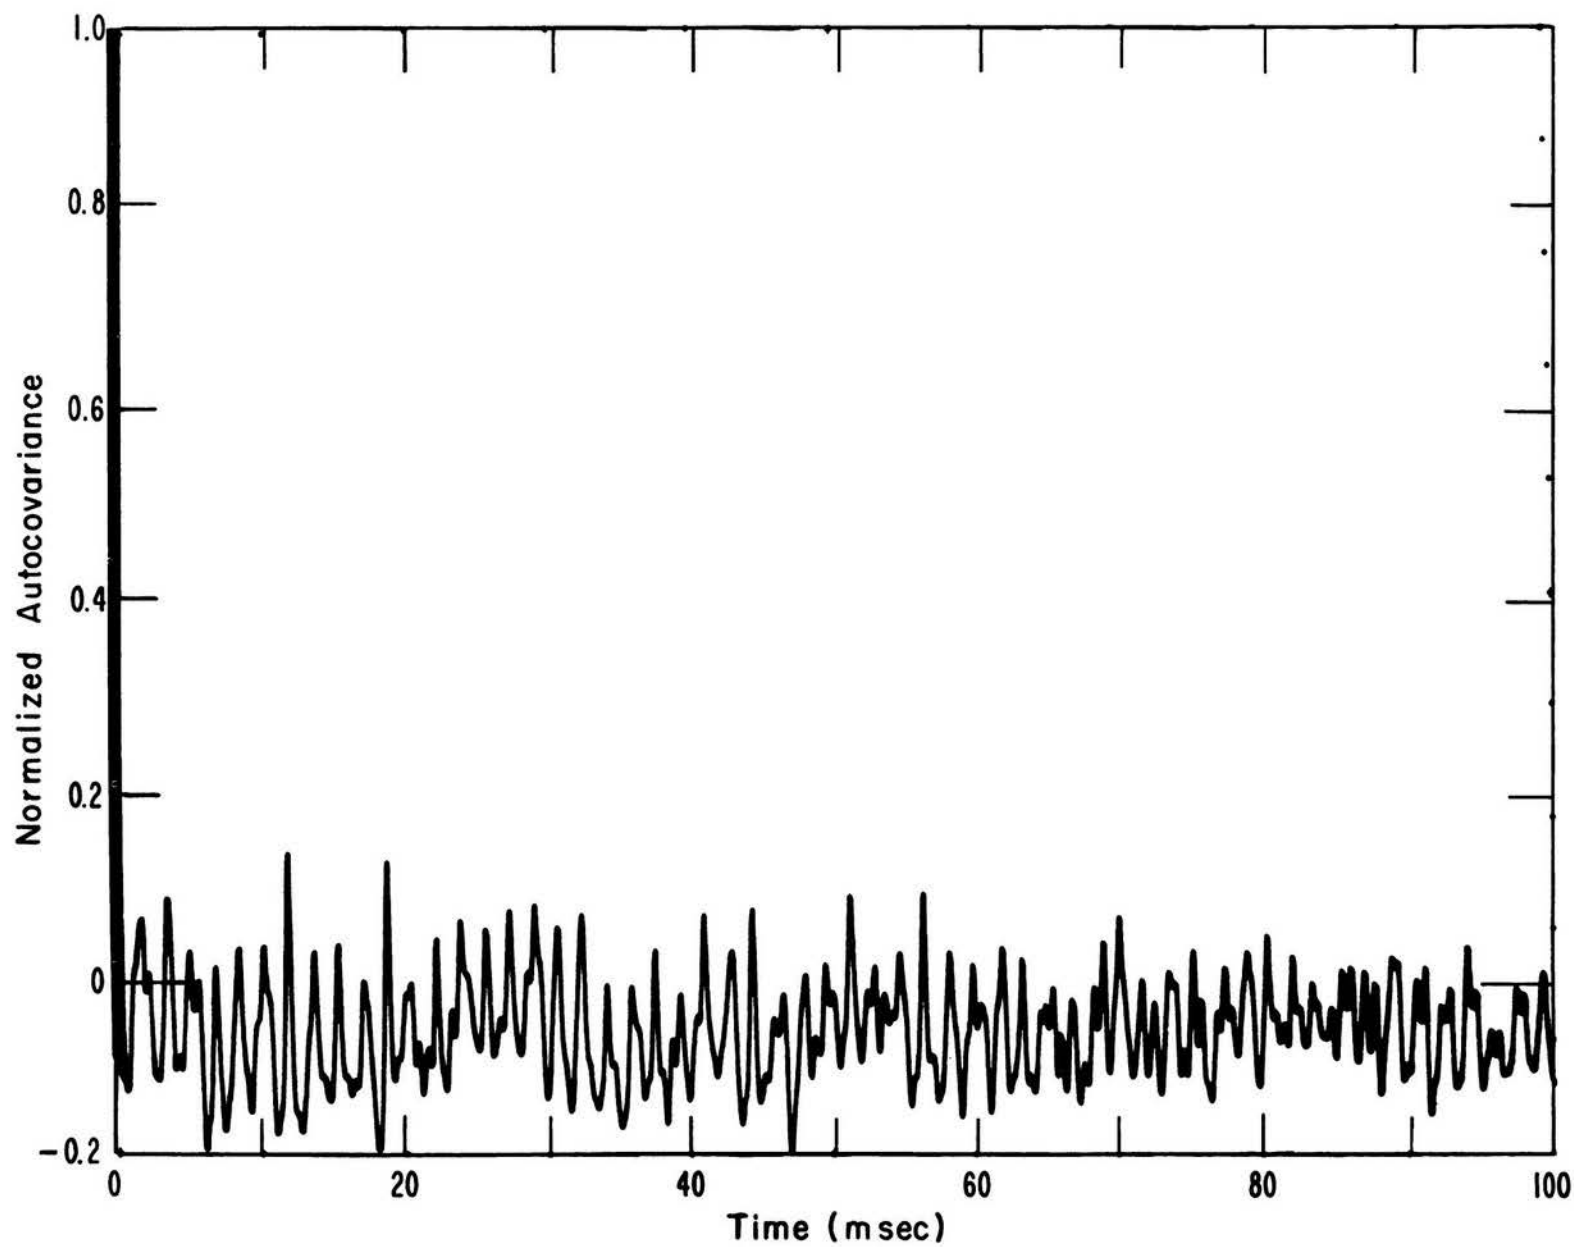


Figure 45. Normalized autocovariance for the noise sample of figure 44.

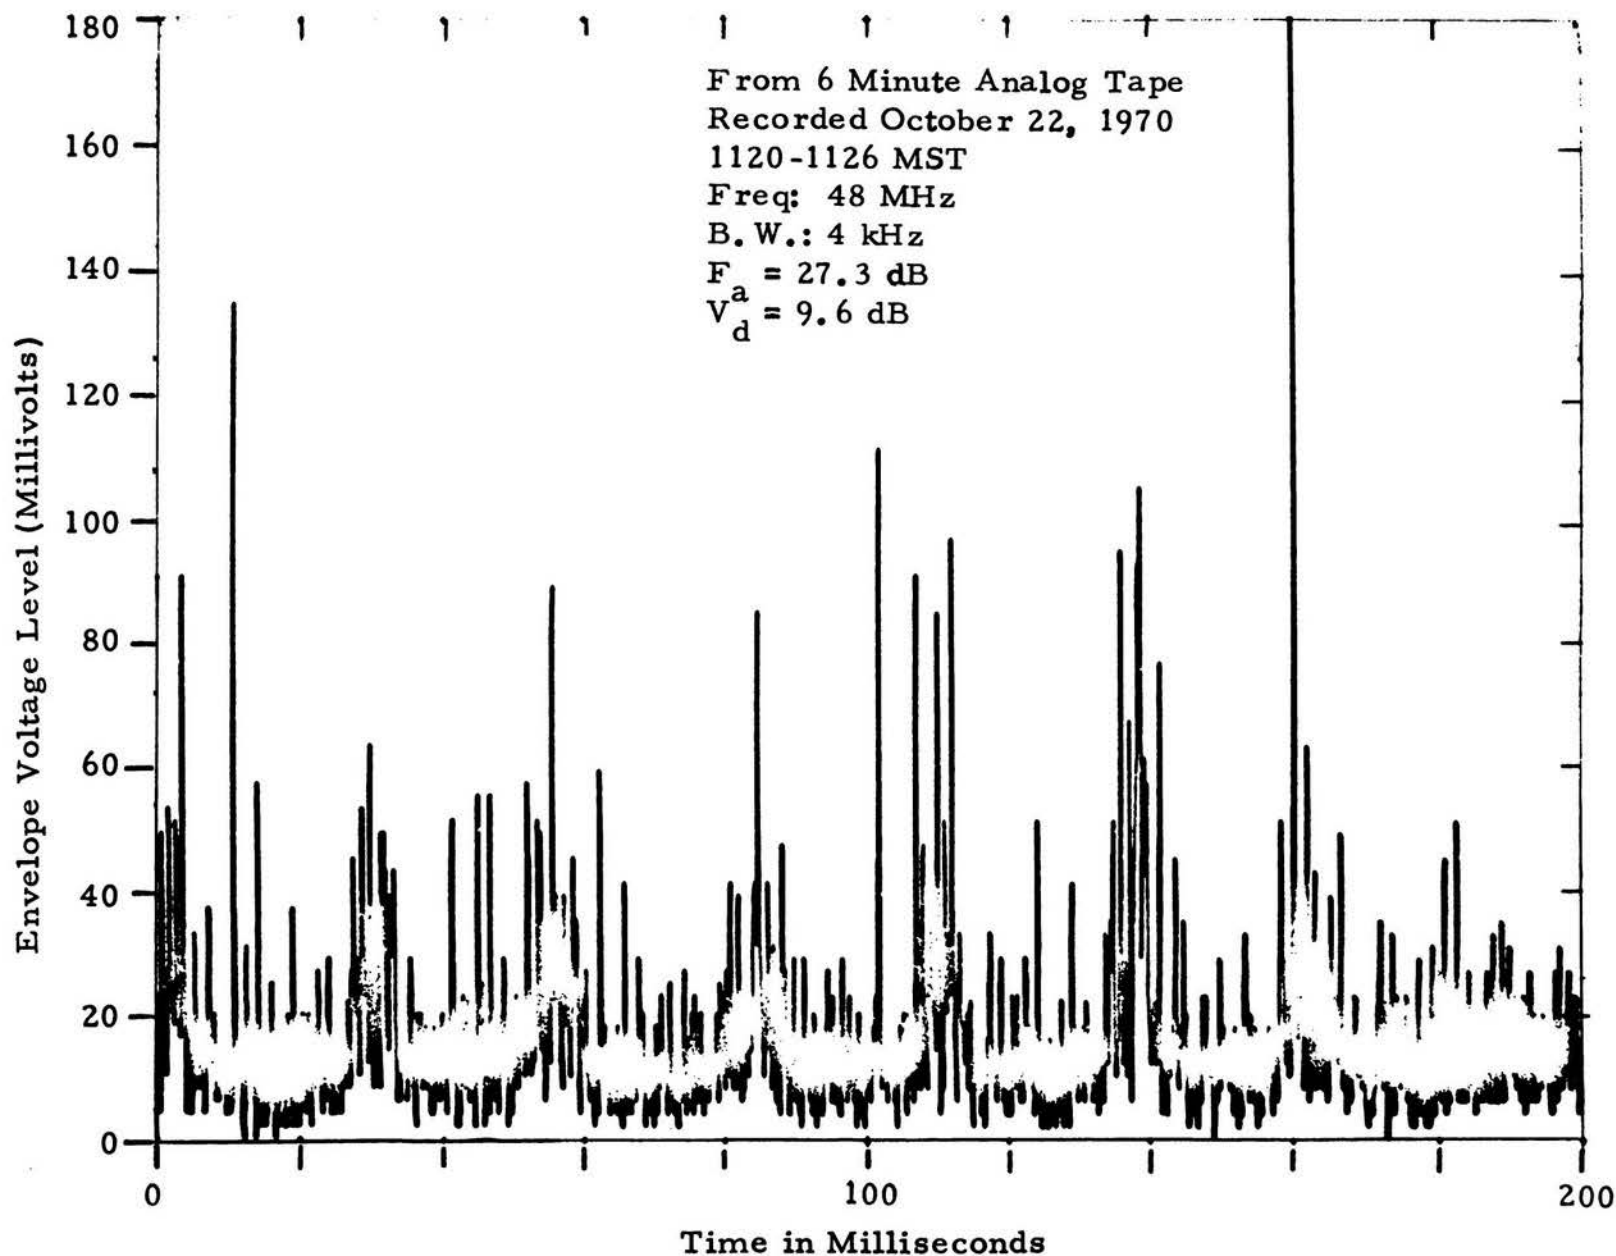


Figure 46. Randomly selected 200 ms sample of noise envelope from a 6-minute, 48 MHz, Denver, Colorado, residential area.

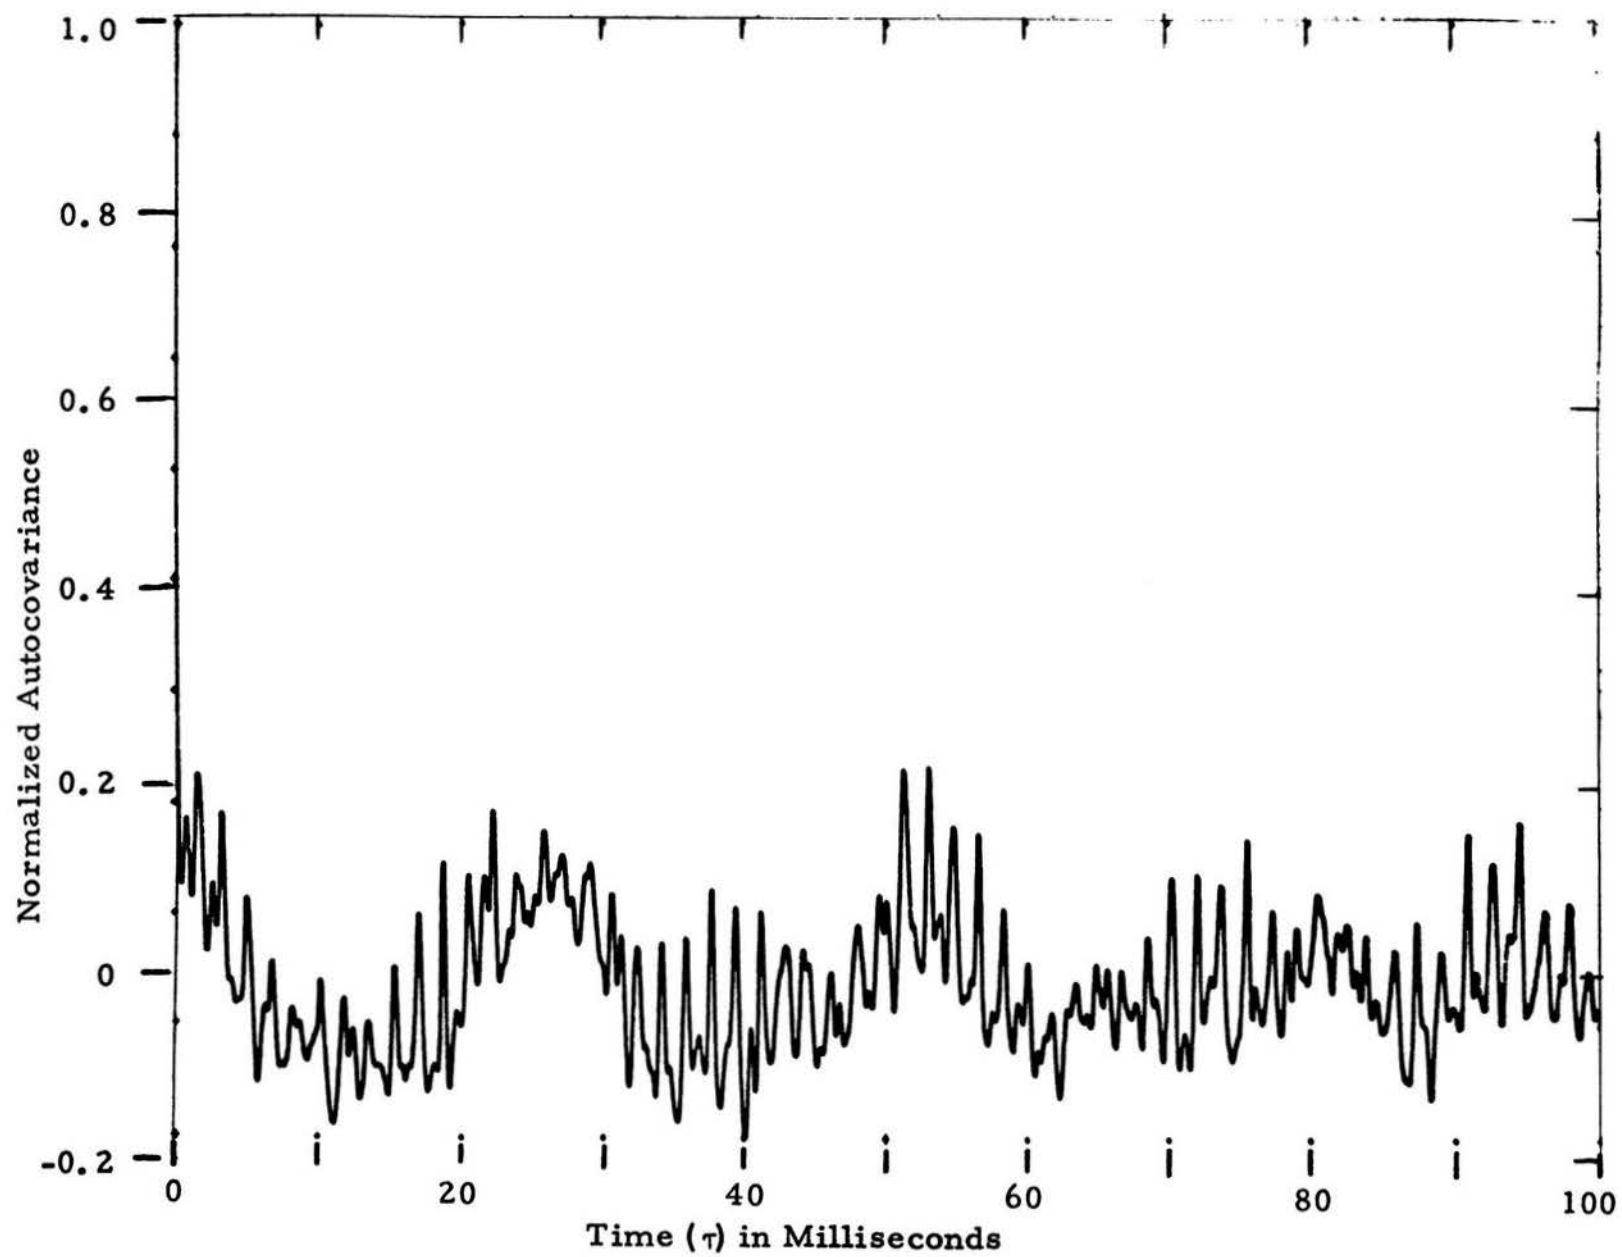


Figure 47. Normalized autocovariance for the noise sample of figure 46.

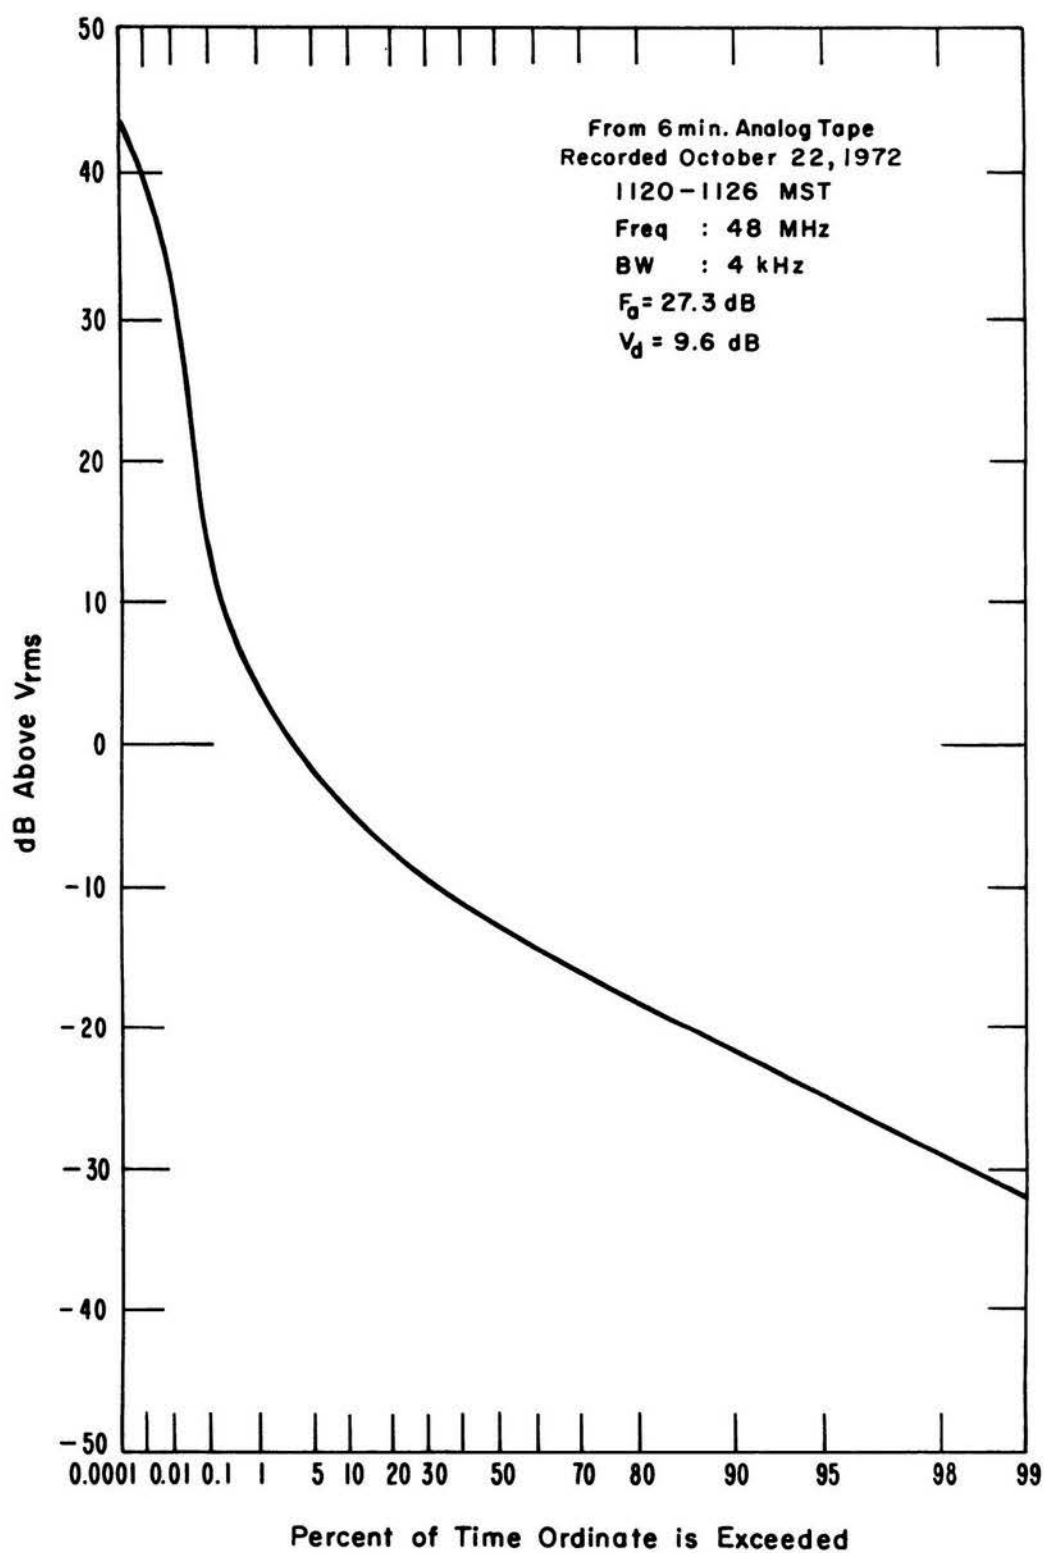


Figure 48. Amplitude probability distribution for a 6-minute sample of noise recorded in a residential area of Denver, Colorado.

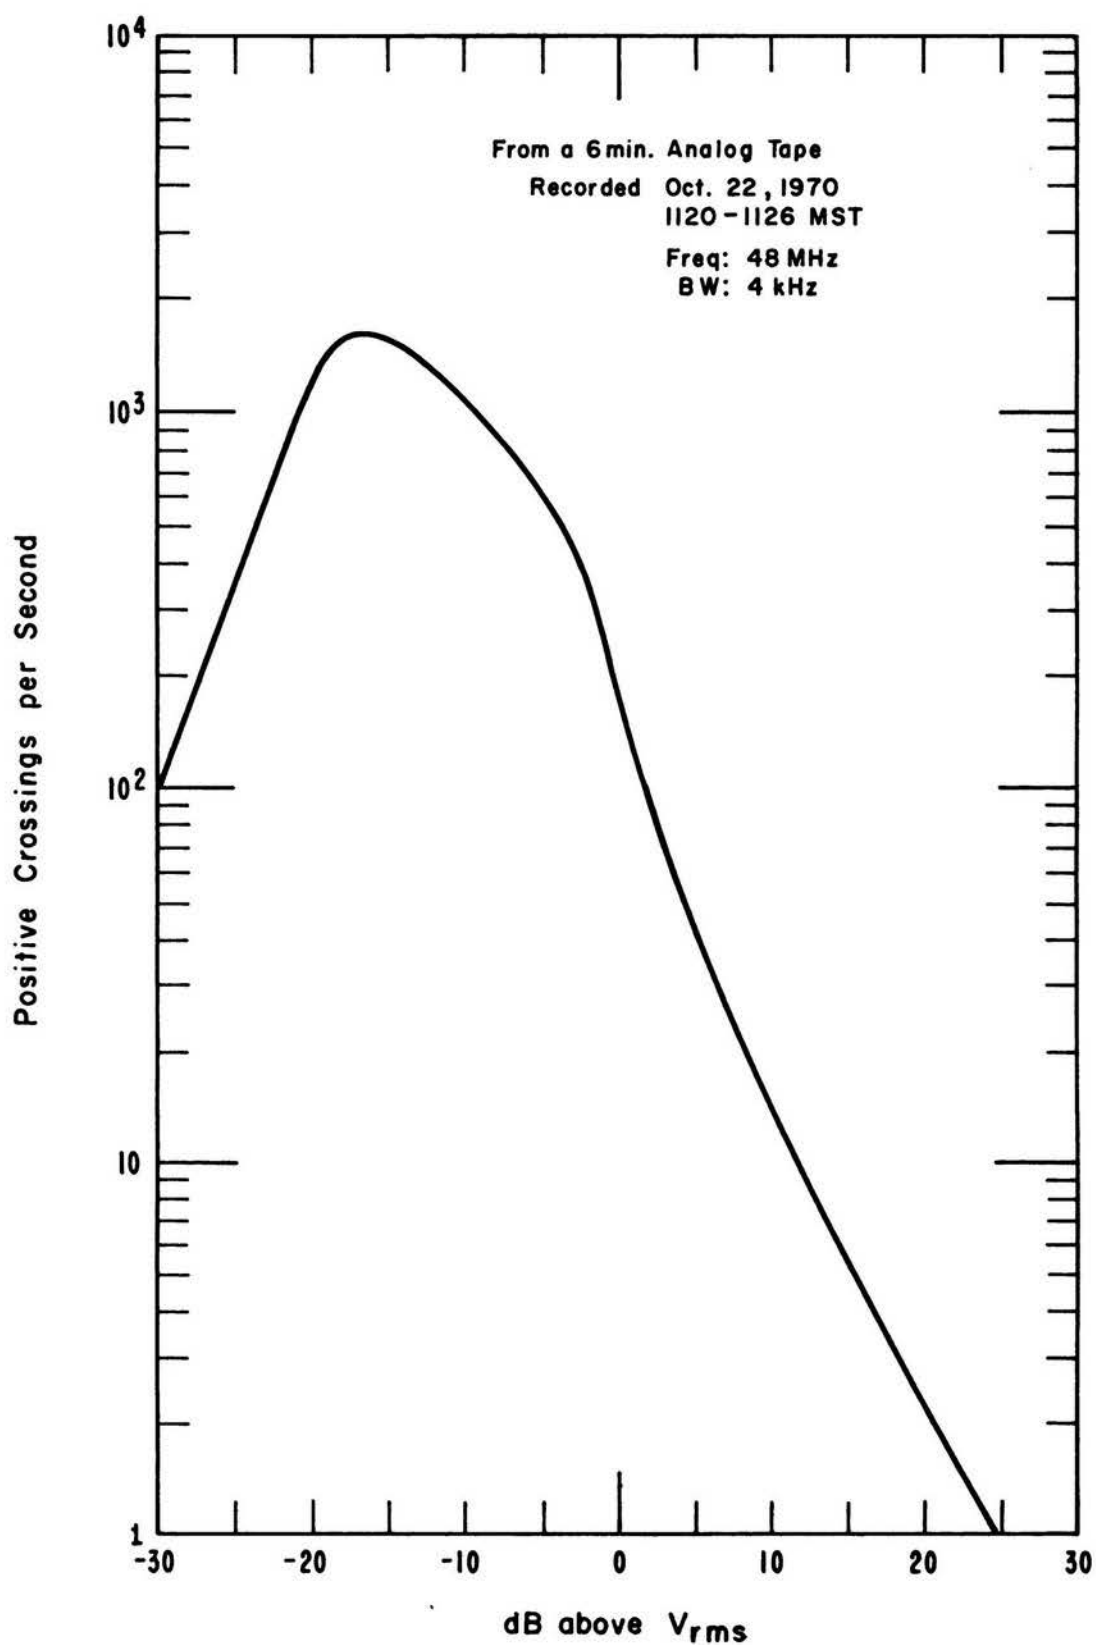


Figure 49. Average positive crossing rate characteristic for the sample of noise of figure 48.

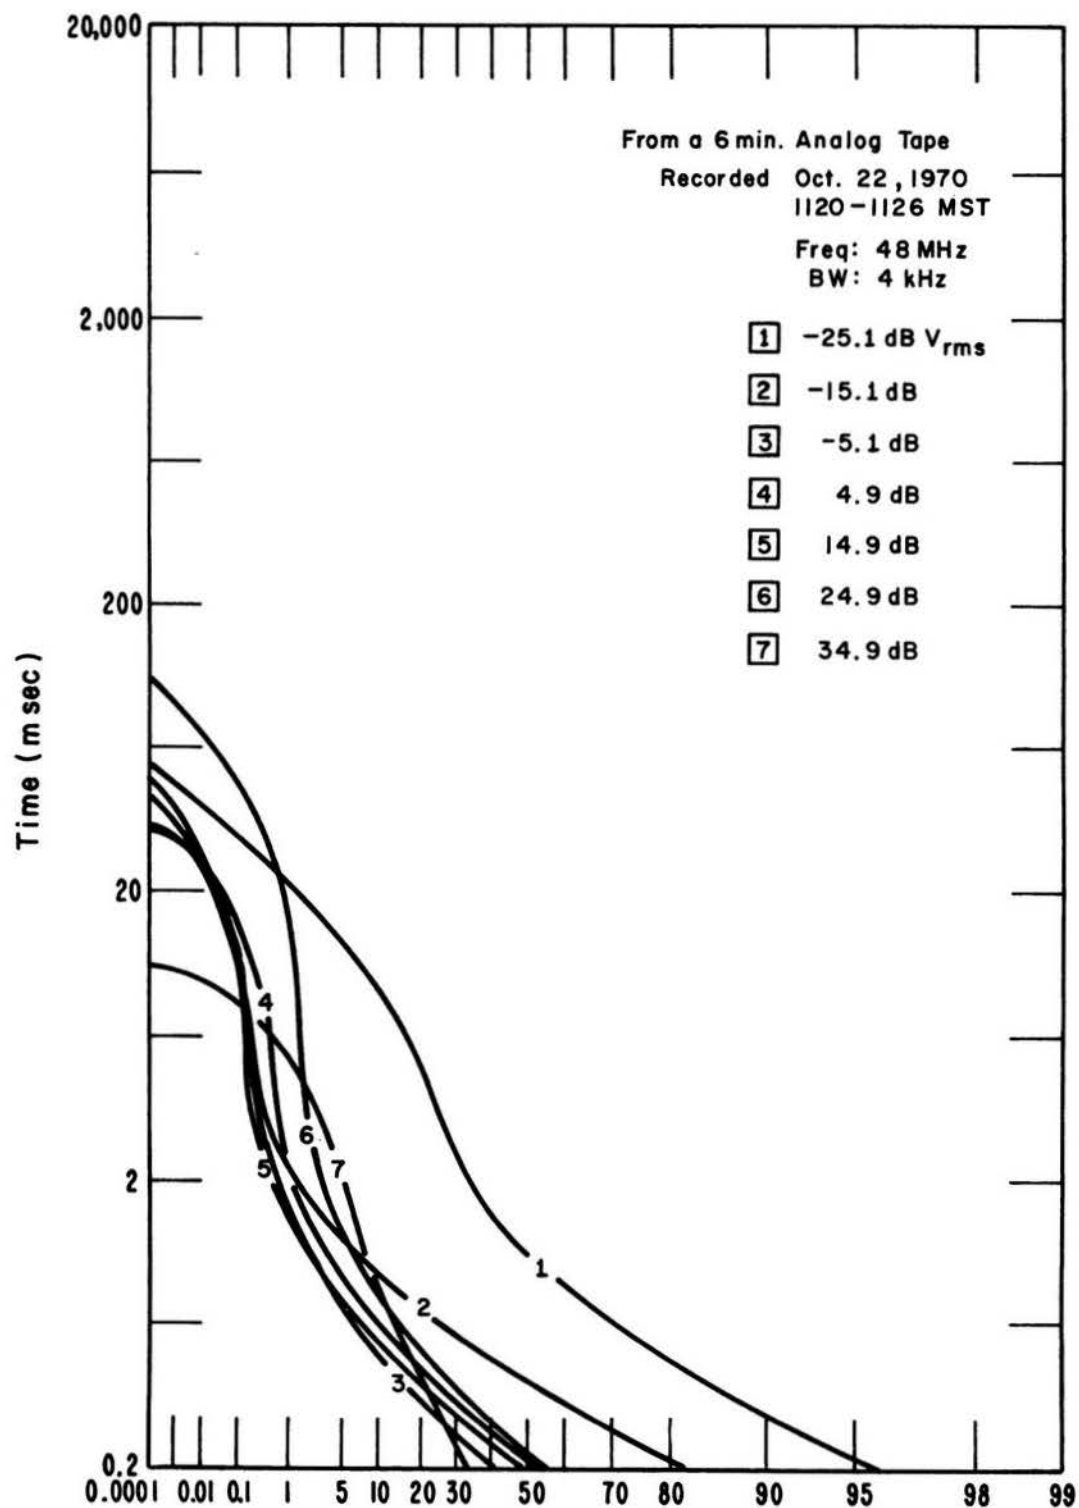


Figure 50. Pulse duration distributions for the sample of noise of figure 48.

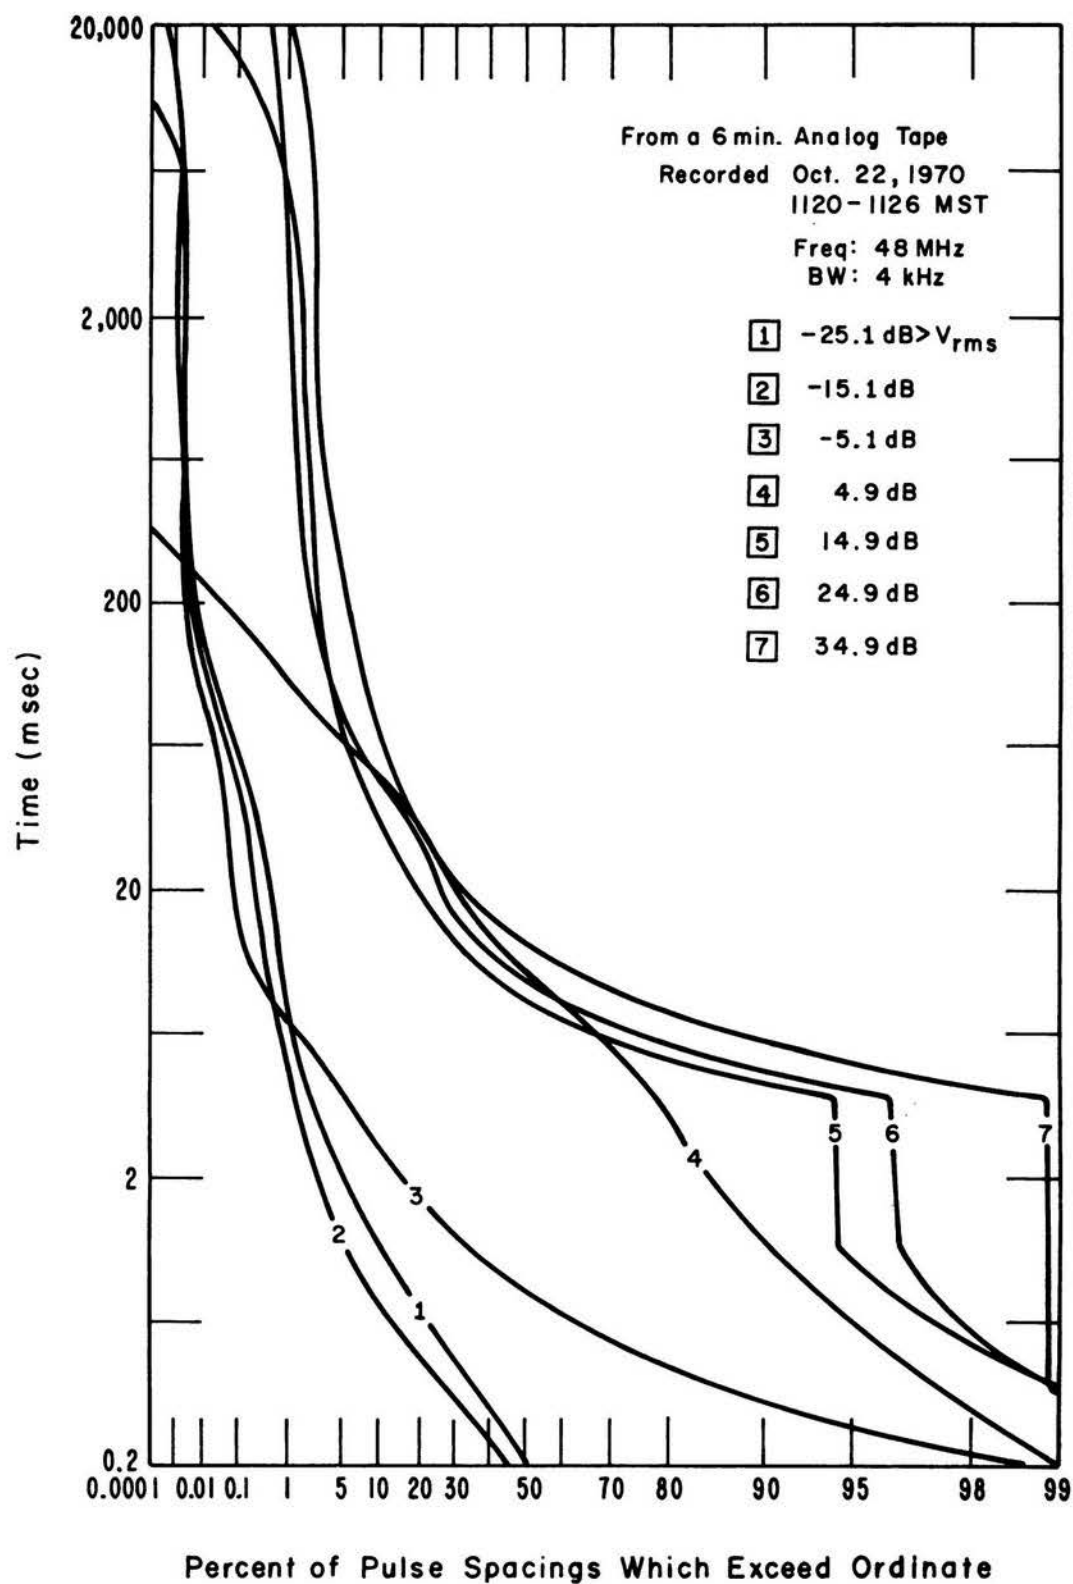


Figure 51. Pulse spacing distributions for the sample of noise of figure 48.

5. USE OF THE MAN-MADE NOISE ESTIMATES IN DETERMINING SYSTEM PERFORMANCE

The usefulness of the man-made radio noise predictions given here will be determined by the degree to which they are applicable to the solution of frequency management or system design problems. We now have a means of estimating the average power, the average envelope voltage, and the average log of the envelope voltage as a function of location, time, and frequency. The question of what can be done with these parameters to provide an estimate of the performance of a system that is going to operate in an environment described by the parameters must be considered.

The first determination that can be made is whether or not the system will be limited by this type of noise and, if so, for what percentage of time this is likely to be the case. There are several limitations that might prevent the system from operating satisfactorily. Let us first consider other types of noise external to the receiving system.¹ At the lower frequencies, that is at HF and below, atmospheric radio noise often will be the limiting type of interference for a fairly large percentage of the time, especially in rural areas. A comparison of the predicted levels of atmospheric radio noise for a given location and for various times as given by CCIR (1964) with the expected man-made noise will determine the choice between these two types of external radio noise to use in the particular design calculations to be made. Since both types of noise have similar characteristics, i.e., impulsive noise spikes superimposed on a white Gaussian noise background, a comparison of the F_a values generally will provide sufficient information on the relative importance of the two. At the higher frequencies where distant sky-wave propagation will not be present, the atmospheric radio noise can almost always be neglected. Only the noise from local activity will interfere under these conditions. In some cases where

high reliability circuits are being considered, it may be necessary to determine the effect of local thunderstorm activity. In general, local activity will have the effect of disrupting the system for several milliseconds anywhere from two to three times a minute to once every 5 min over a period from 15 min to about 2 hrs. In areas of high thunderstorm activity, this intermittent interference may occur as much as 0.5 percent to 1 percent of the year. Since such circuits generally are designed to operate satisfactorily with a time availability of 0.95 (CCIR, 1966), the effect of local thunderstorm activity usually can be neglected at these higher frequencies.

The second type of noise to consider is galactic radio noise. At some locations, this may be the controlling type of noise for a large percentage of the time at any frequency above 20 MHz, but usually the man-made radio noise will be higher than the galactic noise up to some place between 100 to 300 MHz. The predicted curve of galactic radio noise received on a short vertical antenna is shown on figure 1 (from CCIR, 1964). While the variation of this type of noise will be only about ± 2 dB with location and time for this antenna (Crichlow et al., 1955), the level at the terminals of any narrow beam antenna can vary considerably, depending upon the part of the sky within the antenna beam. For an antenna pointing in a fixed direction relative to the earth, the variations of the galactic noise level, if this is the predominant noise, can be measured easily as various parts of the galaxy pass through the antenna beam. Once this pattern has been found for a one-year cycle, it generally will be repeated with only minor variations. The largest variation would be due to the sun passing through the antenna beam if a 0.5° (or less) beamwidth were used. If the galactic noise information is required prior to the installation of a highly directional antenna, the expected levels can be calculated using sky temperature charts and knowing the antenna characteristics. Galactic noise is Gaussian in

character, and this must be considered when comparing it with man-made radio noise. That is, even though the F_a value for the man-made noise may be below the F_a value for the galactic noise, the impulsive nature of the man-made noise can result in noise pulses greatly exceeding the galactic noise level.

If an omnidirectional antenna is used or any type of directional antenna used in a position where the ground is in the antenna beam, thermal noise from the ground, being at reference temperature, must also be considered. However, the only time that this contribution is of any consequence is when the external noise from all other sources is equal to or less than an F_a value of 6 dB. This type noise is also Gaussian in character, and, therefore, the APD is Rayleigh.

Consideration must also be given to the noise factor of the receiving system including antenna circuit losses, transmission line losses, and the noise figure of the receiver, including any preamplifiers or lossy circuits. In general, the receiving system noise figure does not need to be much lower than the expected external noise. If it is much higher than the expected external noise, redesign or improvement in the system noise figure generally will allow improvement in the performance of the communications system. Other factors (signal fading characteristics, intermodulation products, overload characteristics, etc.) may be the limiting factor in the system. If this is the case, equipment or system redesign may decrease these problems.

If it has been established that man-made radio noise will be the limitation to the operation of the system under consideration, the system performance in the predicted environment must be determined. In order to make this determination, a knowledge of how the system will operate in various noise environments is necessary. The required signal-to-noise ratio (SNR) will be dependent on the character of the

additive noise and the characteristics of the system under consideration. When the SNR required to give satisfactory service in the expected type of environment has been determined, the required signal power at the terminals of a lossless receiving antenna (assuming all circuits will affect the signal and noise in the same manner) can be found by

$$P_s = F_a + B + R - 204 \text{ dBW} ,$$

where P_s = the required signal power at the receiving antenna terminals and R = the signal-to-noise ratio, in dB, required for satisfactory service. The value of F_a used here can be the estimated value for some percentage of time based on the median predicted value for the location, the decile value given for that type of location, and an estimate of the expected diurnal variation. This will then provide an estimate of the percentage of time that the required signal-to-noise ratio (and satisfactory service) will be achieved. The difficult part, of course, is determining the required SNR. Some values of required SNR's for certain systems have been established by the International Radio Consultative Committee (CCIR), The Electronics Industries Association (EIA), the Federal Communications Commission (FCC), etc. These values often are given based on the assumption that the interfering noise is Gaussian. Impulsive noise will affect system performance quite differently, and this must be taken into account when using these SNR's. The dashed line on figure 33 is the envelope distribution for Gaussian noise with the same rms value as the impulsive man-made noise sample shown. If the SNR for satisfactory operation in a Gaussian noise environment is used when the actual environment is predominantly man-made noise, an error of several decibels in required signal power could be obtained. For example, consider a binary noncoherent frequency shift keying (NCFSK) system for which a bit error of 10^{-4} or less is required.

For this system, the probability of bit error is given by one half the probability that the instantaneous noise envelope level exceeds the signal level (Montgomery, 1954). Therefore, from figure 33, the required SNR to achieve this performance is 9.5 dB for Gaussian noise, while for man-made impulsive noise (shown on fig. 33) a 29 dB SNR is required to achieve this same performance.

Two examples of methods used to find system performance in atmospheric radio noise are given in CCIR (1964). By using the values of F_a , V_d , and L_d given here, the same type of analysis can be performed for man-made radio noise.

The application of the amplitude statistics of man-made radio noise in determining system performance (i.e., the required SNR) is well documented in Part II, Bibliography, of this report, especially for various types of digital communications systems. Examples of work in this area have been given by Shaver et al. (1972), Gilliland (1972), Bello and Esposito (1969, 1970), Akima et al. (1969), Omura (1969), Halton and Spaulding (1966), Bello (1965), Conda (1965), and Lindenlaub and Chen (1965). These references specify the determination of system performance in impulsive noise.

6. MATHEMATICAL MODELING OF THE NOISE PROCESS

A number of schemes have been developed in the past to improve the operation of various telecommunications systems operating in the presence of noise environments. In the design of optimum detection schemes, the noise usually has been assumed to be Gaussian for lack of a better model that could be handled mathematically. This was the case even though it has long been recognized that the Gaussian model is rarely found unless the limiting noise is due to noise internal to the receiving system or from galactic radio noise. Several methods have been devised for providing better operation in the presence of impulsive

noise. However, all of the more commonly used of these systems, e.g., wideband noise limiting or clipping, hole punching, smear-de-smear, etc., approached the problem by attempting to make the noise less impulsive or more Gaussian in character so that the available detection scheme would be operating in the type of noise for which it was optimized. While these methods do improve system operation under certain conditions, much greater improvement can be obtained by designing the system to match the noise.

For good system design and the determination of the optimum receiving system, more information about the noise is required than generally can be obtained from measurements. Therefore, a mathematical model for the random noise process (as seen by a receiver) must be developed. The problem is to develop a model for the noise that: (1) fits all the available measurements, (2) is physically meaningful when the noise sources, their spatial distribution, etc. are considered, and (3) is simple enough so that the required statistics can be obtained for solving the signal detection problem. In short, the problem is to do for the non-Gaussian man-made noise channel what statistical communications theory has achieved for the Gaussian channel.

Many attempts have been made in the past to model narrowband impulsive noise processes (Furutsu and Ishida, 1960; Bowen, 1963; Beckman, 1964; Galejs, 1966; for example). These models are essentially similar to each other in that they take the received noise to be composed of a sum of filtered impulses whose amplitude and occurrence in time follow various probability distributions. While the above forms are motivated well physically and can be made to fit measured first-order statistics (APD of the noise envelope and ACR, for example), they have several disadvantages as far as the signal detection problem is concerned. For example, these forms generally assume independence in the noise which is not always the case. They are not directly

relatable to the physical characteristics of the noise sources, and the resulting statistics are so mathematically complicated that no attempt has been made to apply them to signal detection problems.

Various empirical models have been developed and related to measurements of impulsive noise (especially for atmospheric noise). These models do not represent the noise process, but only the measured statistics of the process and, therefore, are not, in general, applicable to determining optimum systems for the particular noise under consideration. These models have been used to determine the performance of various suboptimum receivers. Reference to all the above work can be found in the Bibliography, Part II, of this report.

Hall (1968) has developed a different model for impulsive phenomena and applied it to signal detection problems considering LF atmospheric noise. This model, in modified form, also has been shown to be appropriate for HF atmospheric noise and some kinds of man-made noise (Disney and Spaulding, 1970). While optimum receiving structures have been derived and the performance obtained, the Hall model is not easy to relate to the physical environment. Therefore, the proper values of the parameters that specify the model are difficult to obtain. Also, the model has infinite variance for a physically appropriate range of values. Recently, Giordano and Haber (1972) developed an excellent model for atmospheric noise based on the distributions and characteristics of the noise sources, and their approach might be applicable to man-made radio noise problems.

Recent work at OT/ITS has led to the development of a statistical-physical model for man-made noise (Middleton, 1972, 1973, 1974). This model is based on the actual physical parameters of the interference environment (source distributions in space and time, source waveforms, propagation, etc.). Received waveform statistics have been derived for

this model, and they presently are being compared with measurements. Work on the analysis of system performance, deriving of optimal detection schemes, obtaining the performance of these optimal structures, waveform designs, etc. is in progress at OT/ITS using this basic statistical model.

7. CONCLUSIONS AND DISCUSSION

Estimates of the levels of man-made radio noise that will occur at locations and times in the future have been given. These estimates were obtained from the analysis of the OT data base of measurements made over the past several years. A method for obtaining the available noise power at a receiving location from the automotive traffic densities in the vicinity of this location has been developed. Also, measurements showing the noise power to be expected from high voltage transmission lines have been included. Some indication regarding the relationship between the horizontal and vertical components of the noise field has also been given.

Estimates of the average and average logarithm of the noise envelope voltage are given for two bandwidths, 10 kHz and 4 kHz. It has been shown that the parameters V_d and L_d are highly correlated, but that the noise level, F_a , is uncorrelated with the noise impulsiveness (as characterized by V_d). In addition, examples of detailed amplitude and time statistics of the received noise process have been shown.

While the OT/ITS data base is undoubtedly the largest single source of noise data available, it is still a relatively small sample considering the few areas actually investigated. One can ask if the results given are typical of all cities since most of the business and residential area measurements were made in medium or small size metropolitan areas. There appears to be no really good way of relating the man-made noise data to what would be found in a large metropolitan area

such as New York City or Los Angeles until compatible measurements in this type of area are available for comparison. However, the following reasons seem to indicate that, with care, the estimates given here will be applicable: In general, the noise in the business and residential areas seems to be principally due to the noise sources within a fairly short distance of the receiving location. This is evidenced by the substantial changes in noise level that take place within a block when mobile measurements are being taken (Spaulding et al., 1971). A small area within a business area, as large as it is homogeneous, should not have too different characteristics, whether it is in Boulder, Colorado, or New York City. As long as traffic densities, power distribution systems, and other man-made radio noise sources are comparable and the general character of the areas is the same, the number of additional noise sources in the larger population area cannot be increased greatly per block. The only exception might possible be the presence of numerous high-rise office buildings, such as exist in some New York City business areas. In an area where freeways must carry large numbers of vehicles moving at a relatively high speed, the amount of traffic could be considerable higher, as might be the case when comparing Denver with, say, Los Angeles. However, when considering the business areas of these two locations, the street widths and speed limits are comparable; thus, traffic density cannot vary by a large amount, since traffic congestion is found at both places. From these considerations, it seems reasonable to expect the noise estimates to be as valid for New York City as for, say, Albuquerque, New Mexico, even though there is a twenty-to-one population difference.

Most of the rural data were taken in the sparsely populated areas of the western United States. Comparison with data from the few rural areas measured in the eastern United States does not seem to show

significant differences, since these values were within the range of variations found from place to place in the western areas. The presence of nearby power lines, however, should be considered in all areas but especially in rural areas and at frequencies below about 20 MHz.

The analysis in this report indicates that the noise power decreases with increasing frequency at a rate of 27.7 dB/decade. Whether this same trend continues at frequencies above 250 MHz is unknown; in fact the 250 MHz values would suggest that the noise power might not decrease as rapidly, or even decrease at all, with increasing frequency for frequencies above about 100 MHz. There are some contentions that the man-made radio noise from ignition systems will show a peak between 300 and 500 MHz. However, the AMA peak measurements on individual cars do not bear this out, although peak values cannot be related to the received noise power. Also, the 250 MHz OT/ITS values may be high because of the editing process necessitated by the recording system noise factor at this frequency.

The results given in this report can only give estimates of the man-made noise at average or typical locations and at ground level. Any strictly local unusual effects must also be considered. For example, OT/ITS personnel found strong elevator control noise at 1.7 GHz to be the predominant source of interference at the top of an 18-story building, noise from computers and peripheral equipment to be even higher than traffic noise on the highway near the buildings at the old NBS site in Washington, D. C., and that the highest noise source at Pow Main, Alaska, was a beacon light on top of a 200-ft tower.

In 1967 the authors of this report prepared an estimate of the man-made radio noise expected in urban, suburban, and rural locations for JTAC (1968). Since the present estimates show as much as a 10 dB difference from the previous JTAC estimates and since the JTAC estimates have been widely used, a comparison of the two sets of

estimates is in order here and is shown in figure 52. Note the scale change for the three types of areas on this figure to provide separation of the sets of curves. The first noticeable difference is in the shape of the JTAC curves with a break between 10 and 20 MHz. This occurred when data were combined from measurements made by various investigators at different times, locations, and frequencies, with no one set of data covering the whole frequency range. The break seemed not unlikely at the time since between 10 and 20 MHz the predominant noise sources change from those associated with power lines to automotive ignition systems. It appears now, though, that the real cause was due to the time and location variation, the incomplete frequency coverage of the measurements, and the attempt to relate dissimilar parameters.

The next obvious difference is in the nomenclature used to describe the types of areas. The designations of business, residential, and rural were chosen in place of urban, suburban, and rural, since the latter are based more on political divisions than on the uses of the area. For example, urban is within the limits of a city, while suburban is considered to be a fairly populous area surrounding a city but outside the city limits. However, the man-made radio noise is similar for residential areas or for business areas (shopping centers, manufacturing and service locations), whether they are within the political boundaries of a city or in a suburban area. Therefore, the new designations are more definitive and can be better identified and described without the ambiguities arising from using the previous designations.

The analysis of additional data has decreased the difference between the average values for the three types of areas. A good part of this difference results from the fact that the JTAC rural curve below 20 MHz was greatly influenced by the inclusion of the CCIR man-made rural noise data (CCIR, 1964). In the present analysis, these data were not included in the general rural area estimates since the data

were from locations carefully selected in each case to be as free of man-made radio noise as possible. In addition, the data base from these locations far exceeded the amount of data collected at all other rural locations and would give undue influence to an estimate utilizing all rural data in one group. Altogether, a much better estimate of the man-made radio noise and its location and temporal variations should be obtained from the present estimates than from the JTAC values.

8. ACKNOWLEDGMENTS

The authors wish to thank the personnel taking the data in the field and doing the data reduction and preliminary analysis without whose conscientious efforts this report would not be possible. The efforts of Don Zacharisen of ITS, who performed the computer programming and data analysis, and Larry Schultz, who advised in the proper mathematical analysis of the data, are especially appreciated. Special thanks are given to George Hagn of Stanford Research Institute, Ed Skómal of Aerospace Corporation, and A. G. Hubbard of the Department of Defense for their invaluable discussions, comments, and suggestions after reading the first draft.

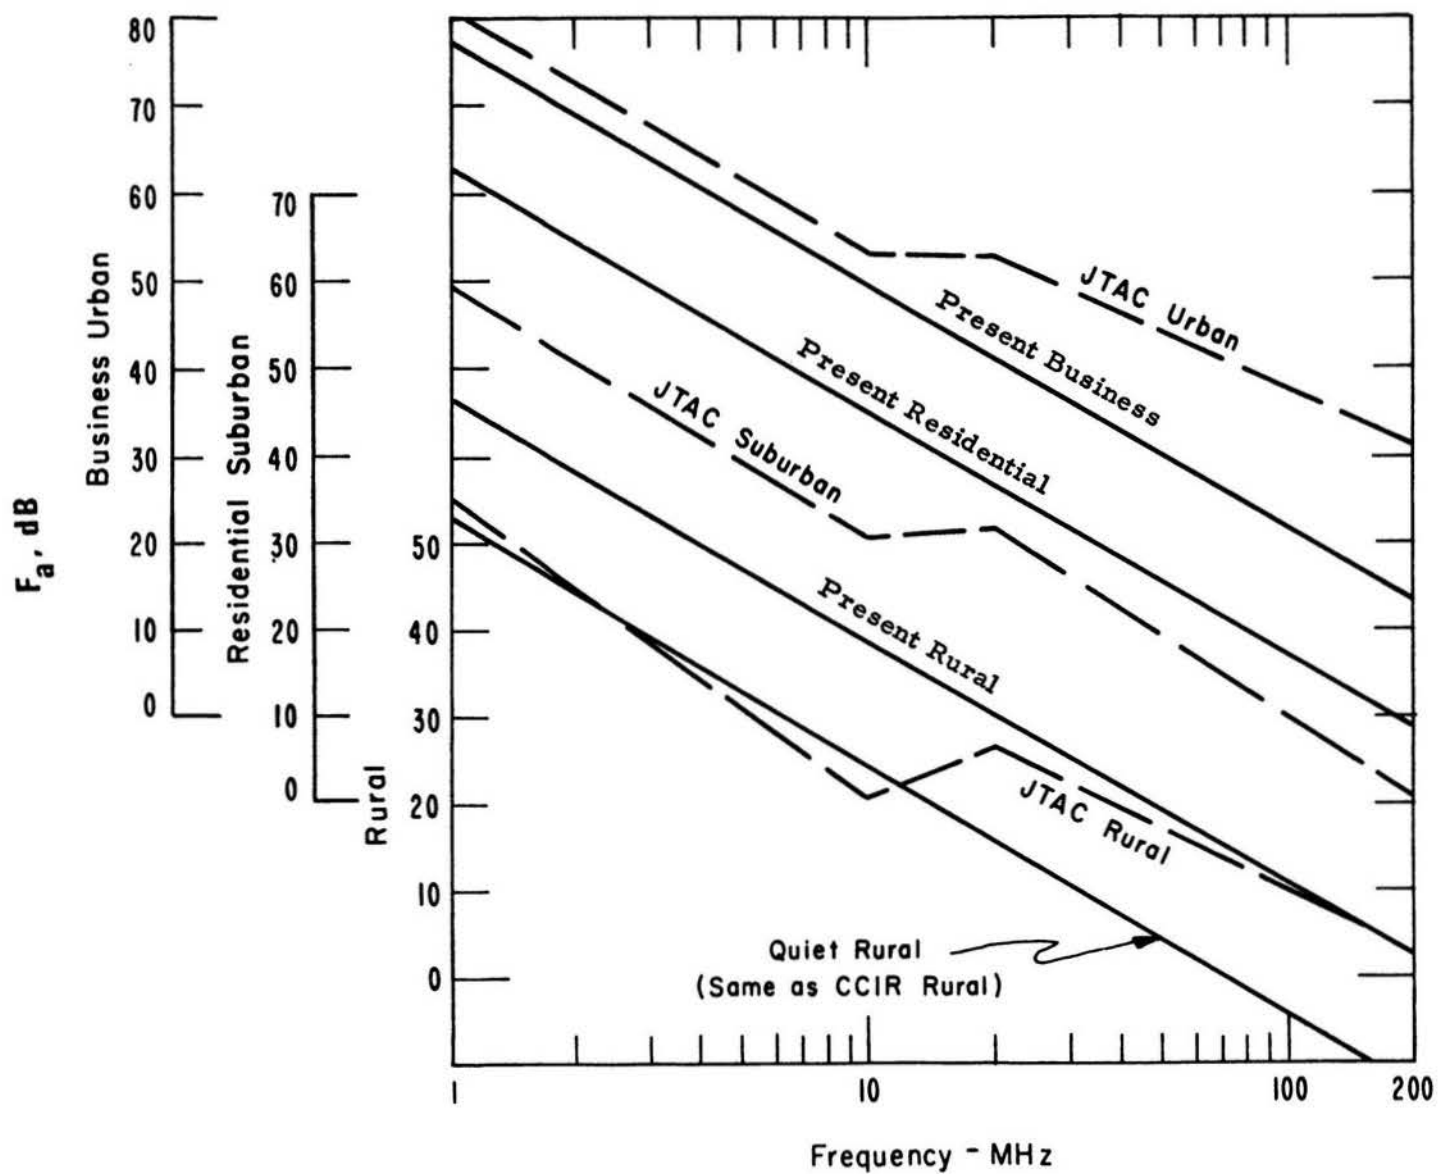


Figure 52. Comparison of present estimates with JTAC (1968) estimates.

9. REFERENCES

- ACLMRS (1966), Man-made noise, Report to the Technical Committee of the Advisory Committee for Land Mobile Radio Services from Working Group 3 (Jules Deitz Chairman), (U.S. Government Printing Office).
- Automobile Manufacturers Association (1971), Data package, Radio Interference Tests, South Lyon, Michigan, June 1417, Automobile Manufacturers Association Inc., Detroit, Michigan.
- Akima, H., G. G. Ax, and W. M. Beery (1969), Required signal-to-noise ratios for HF communications systems, ESSA Technical Report ERL 313-ITS92.
- Beckman, P. (1964), Amplitude probability distributions of atmospheric radio noise, Radio Science, Vol. 68D, No. 6, pp. 723-736.
- Bello, P. A. (1965), Error probabilities due to atmospheric noise and flat fading in HF ionospheric communications systems, IEEE Trans. on Comm. Tech. Vol. 13, No. 3, pp. 266-279.
- Bello, P. A., and R. Esposito (1969), A new method for calculating probabilities of errors due to impulsive noise, IEEE Trans. Communications Technology, Vol. COM-17, pp. 368-379.
- Bello, P. A., and R. Esposito (1970), Error probabilities due to impulsive noise in linear and hard limited DPSK systems, Technical Memorandum No. T-857, Raytheon Co., Research Div., Waltham, Massachusetts.
- Bowen, B. A. (1963), Some analytical techniques for a class of non-Gaussian processes, Queens University Research Report No. 63-3.
- CCIR (1957), Revision of atmospheric radio noise data, Documents of the VIII Plenary Assembly, Report 65, International Telecommunication Union (ITU), Geneva, Switzerland.
- CCIR (1964), World distributions and characteristics of atmospheric radio noise, Documents of the Xth Plenary Assembly, Report 322, ITU, Geneva, Switzerland.

- CCIR (1966), Operating noise-threshold of a radio receiving system, Documents of the XIth Plenery Assembly, Report 413, Oslo, Reports by the International Working Party III/1, ITU, Geneva, Switzerland.
- Crichlow, W. Q., D. F. Smith, R. N. Norton, and W. R. Corliss (1955), Worldwide radio noise levels expected in the frequency band 10 kilocycles to 100 megacycles, National Bureau of Standards Circular 557.
- Crichlow, W. Q., A. D. Spaulding, C. J. Roubique, and R. T. Disney (1960), Amplitude probability distributions for atmospheric radio noise, National Bureau of Standards, Monograph 23.
- Crippen, L. J., O. D. Stewart, and J. W. Engles (1970), Program for controlling the effects of radio noise and improving telecommunications system effectiveness: Bibliography: Statistical parameters of radio noise, Naval Security Engineering Facility, 3801 Nebraska Ave., N.W., Washington, D.C.
- Crippen, L. J. (1971), Investigation of radio frequency interference at Edgell, Scotland, Final Report, Naval Electronic Systems, Test and Evaluation Facility, Project No. 70-157, Serial No. 3, March 13, 1971, Washington, D.C.
- Conda, A. M. (1965), The effect of atmospheric noise on the probability of error for a NCFSK system, IEEE Trans. Communications Technology, Vol. COM-13, pp. 280-283.
- Disney, R. T., and A. D. Spaulding (1970), Amplitude and time statistics of atmospheric and man-made radio noise, ESSA Tech. Report ERL 150-ITS98, ESSA Research Laboratories, Boulder, Colorado.
- Doty, A. C., Jr. (1971), A progress report on the Detroit electromagnetic survey, Automotive Engineering Congress, Detroit, Michigan, January 11-15, 1971, Paper No. 710031, Society of Automotive Engineers.
- Friis, H. T. (1944), Noise figure of radio receivers, Proc. IRE, 32, 419.
- Furutsu, K., and T. Ishida (1960), On the theory of amplitude distributions of impulsive random noise and its application to the atmospheric noise, J. Radio Res. Labs. Japan, Vol. 7, No. 32, pp. 279-307, July.

- Galejs, J. (1966), Amplitude distributions of radio noise at ELF and VLF, *J. Geophys. Res.*, 71, pp. 201-216.
- Gilliland, K. E. (1972), Models of nondiversity digital receiver performance in general noise, No. ESD-TR-72-295, Electromagnetic Compatibility Analysis Center, North Severn, Annapolis, Md.
- Giordano, A. A., and F. Haber (1972), Modeling of atmospheric noise, *Radio Science*, Vol. 7. No. 11, pp. 1011-1023.
- Hall, H. M. (1966), A new model for "impulsive" phenomena: application to atmospheric noise communication channels, Stanford Electronics Laboratories Technical Report No. 3412-8 and No. 7050-7.
- Halton, J. H., and A. D. Spaulding (1966), Error rates in differentially coherent phase systems in non-Gaussian noise, *IEEE Trans. Communications Technology*, Vol. COM-14, pp. 594-601.
- JTAC (1968), Man-made radio noise, Report of Joint Technical Advisory Committee, Subcommittee 63.1.3 (Unintended Radiation), Supplement 9, Spectrum Engineering, the Key to Progress, published by IEEE.
- Lindenlaub, J. C., and K. A. Chen (1965), Performance of matched filter receivers in non-Gaussian noise environments, *IEEE Trans. on Comm. Tech.* Vol. 13, No. 4, pp. 545-547.
- Middleton, D. (1960), Introduction to Statistical Communications Theory (McGraw-Hill Book Co., Inc., New York, N.Y.)
- Middleton, D. (1972), Statistical-physical models of urban radio noise environments - Part I: Foundations, *IEEE Trans. EMC*, Vol. EMC-14, No. 2, pp. 36-56.
- Middleton, D. (1973), Man-made noise in urban environments and transportation systems: Models and measurements, *IEEE Trans. on Communications*, Vol. COM-21, No. 11, pp. 1232-1241.
- Middleton, D. (1974), Statistical-physical models of man-made radio noise, Part I: First-order probability models of instantaneous amplitude (to be published as OT Report).

- Montgomery, G. F. (1954), Comparison of amplitude and angle modulation for narrow-band communication of binary-coded messages in fluctuation noise, Proc. IRE, Vol. 42, pp. 447-454.
- Norton, K. A. (1953), Transmission loss in radio propagation, Proc. IRE, 41, 146.
- Office of Telecommunications Policy (1970), Manual of Regulations and Procedures for Radio Frequency Management, Basic parameter for measurement of radio noise, Chapter 5, pp. 5-35 (sect. 5.8).
- Omura, J. K. (1969), Statistical analysis of LF/VLF communications modems, Special Technical Report 1, SRI project 7045, Stanford Research Institute, Menlo Park, California.
- Shaver, H. N., V. E. Hatfield, and G. H. Hagn (1972), Man-made radio noise parameter identification task, Final Report, SRI Project 1022-2, Stanford Research Institute, Menlo Park, California.
- Spaulding, A. D., W. H. Ahlbeck, and L. R. Espeland (1971), Urban residential man-made radio noise analysis and predictions, OT/ITS Telecommunications Research and Engineering Report 14.
- Spaulding, A. D. (1971), Amplitude and time statistics of urban man made noise, IEEE International Conference on Communications, Conference Record, IEEE Cat. No. 71C28-COM.
- Watt, A. D., R. M. Coon, E. L. Maxwell, and R. W. Plush (1958), Performance of some radio systems in the presence of thermal and atmospheric noise, Proc. IRE, Vol. 46, pp. 1914-1923.
- Wozencraft, J. M., and I. M. Jacobs (1965), Principles of Communications Engineering (New York, Wiley).

APPENDIX A

MEASUREMENT METHODS USED TO OBTAIN THE DATA BASE

Data used in this report were obtained using the OT/ITS mobile radio noise lab. The exclusion of other data was felt justified, not on the basis of the validity of the other data, but because of lack of compatibility with data used in this report. In many instances parameters have been measured (e.g., peak or quasi peak) which by themselves do not provide sufficient information for frequency management or system design considerations and, without further information about the noise process from which the measurements were obtained, cannot be related to other parameters of the radio noise. In general, other measurements provided information at only one or two frequencies, and attempting to combine these measurements with others proved futile since frequency, time, and location statistics were hopelessly intermixed.

Since the entire data base used here came from measurements taken with the OT/ITS mobile radio noise lab, a description of the noise lab and the equipment involved, as well as some information on measurement techniques, may prove helpful in providing a better understanding of the predictions. This appendix is principally a description of this facility and its advantages and limitations for use in obtaining an adequate man-made radio noise data base. The mobile laboratory consists of a tractor and van. The tractor utilizes a full diesel engine and was purchased under the MIL-specifications for a quiet vehicle. Additional noise suppression was added after delivery; e.g., suppression on windshield wiper motor, alternator and controls, wheel bearings, etc. A diesel generator set was installed between the cab and the fifth wheel to provide power for mobile or remote operation. A low-boy type semitrailer van is used so that a two-meter-high vertical antenna on the van roof

will clear power and telephone lines that might be encountered during mobile measurements. The van has an exterior aluminum skin with the roof acting as the ground plane for the receiving antennas. The van is heated and air-conditioned for temperature stability, thus providing for measurement stability after approximately a half-hour equipment warm-up period.

The measuring-recording system is shown in the block diagram figure A1. Any eight of the ten nominal recording frequencies can be used simultaneously. The ten frequencies were chosen with approximately octave spacings between 250 kHz and 250 MHz. As shown on figure A1, these frequencies are 250 and 500 kHz, 1, 2.5, 5, 10, 20, 50, 100, and 250 MHz. Relatively clear channels were used when possible, e.g., the WWV guard bands. Limited frequency adjustment about the nominal frequencies is provided to assist in tuning away from signals in the recording channels. Two receiving antennas are used, 2 meter and 0.5 meter vertical whip antennas. The eight lower frequencies are recorded from the 2-meter antenna, and the two higher frequencies are recorded from the 0.5 meter antenna. Each antenna is connected to a passive coupling unit which provides some preselection and gives 50 Ω outputs for the preamplifiers.

The basic data source in the van is the set of eight noise receivers and metering strips. Each of these measures the rms envelope voltage, the ratio between the rms and the average voltage (V_d), the ratio between the rms and the average of the logarithm of the voltage (L_d), and the ratio between quasi-peak voltage and rms voltage (Q_d). The quasi-peak detector uses a 1 ms charging time constant and a 160 ms discharge time constant. Currently the receivers are modified general purpose superhetrodyne communications receivers, and the metering strips are of a running average type with time constants in the

50-100 sec range. The receivers, as modified, operate with a 4 kHz effective noise bandwidth (the original noise bandwidth was 10 kHz). All channels have preamplifiers such that the system noise figure (excluding antenna losses) is less than 5 dB. The instantaneous dynamic range is approximately 85 dB, 50 dB above and 35 dB below the rms voltage. The recording ranges of the averaged values are 70 dB for the rms voltage, 20 dB for V_d , 30 dB for L_d , and 30 dB for Q_d .

The data recording system consists of an analog multiplexer, an A-D converter, a digital multiplexer, and an IBM-compatible incremental digital tape recorder. Each of the 32 averaged detector outputs (rms, V_d , L_d , and Q_d on each of eight channels) are sampled every 10 sec, and the values are recorded. Time, location, and channel status are also recorded at the 10-sec intervals.

Other equipment available includes a distribution meter (DM-2) which can be used to obtain the APD or the ACR, giving more detailed noise information on any one of the 8 channels. The DM-2 utilizes 15 level detectors spaced at 6 dB intervals. Counters at each level accumulate the time the noise was above each level when measuring the APD or the number of positive crossings at each level when measuring the ACR. When used with the data recording system, the counters are read every 10 sec, and the results are recorded on the incremental tape recorder. The 15 levels can be divided so that part of the 15 channels can be used to obtain APD information and the balance can be used to obtain ACR information. The DM-2 will operate on the output of any of the receivers, but can be used on only one frequency channel at a time. The DM-2 contains built-in calibrators and power supplies, as well as direct visual readouts, and is often used separately in a manual mode for obtaining the APD or ACR for radio noise samples obtained by other recording means.

An FM tape recorder is used with special associated circuitry to provide analog recordings of the predetection noise process. The analog tape system (ATS) is designed to record accurately wide dynamic range electromagnetic noise signals. Up to three noise channels can be recorded simultaneously. The system has a bandwidth of 4 kHz and a dynamic range of 90 dB. The wide dynamic range is achieved by taking the logarithm of the higher levels, thus decreasing the dynamic range of the signal recorded on tape. The lower 30 dB of the dynamic range is handled linearly throughout the system, while the upper 60 dB is log-compressed into an effective 10 dB range. Consequently, the signal recorded on the tape will require only a 40 dB dynamic range. The tape recorder, operating in its FM mode at 60 ips, will adequately handle a 40 dB dynamic range, and most of its accuracy is in the upper part of the dynamic range where it is needed to recover accurately the log-compressed portion of the signal.

The noise to be recorded is obtained from the IF output of a receiver, with a 4 kHz bandwidth, tuned to the desired frequency. The noise signal is translated to zero frequency by two balanced mixers, with local oscillators supplying the sine and cosine components of the IF. This results in two outputs, each of which will have components in the range of d-c to 2 kHz. This mixing scheme gives a bandwidth whose lower limit is d-c, without losing phase information (i. e., without detecting). These outputs are compressed and recorded.

The recorded outputs can be recovered using complimentary circuits (providing the antilog of the log-compressed portion) to obtain the original 90 dB dynamic range of the noise. These two outputs (one created by mixing with the sine component and the other with the cosine component) are mixed with a sine and cosine local oscillator, respectively, and added together. This gives the original noise centered on an IF, which may or may not be the same as the original IF.

The recording and playback system consists of the tape recorder, the auxiliary recording electronics (mixers, local oscillators, log compressors, etc.), and the auxiliary playback electronics (antilog expanders, mixers, local oscillators, etc.). Figure A2 shows a block diagram of the analog recording system.

The advantage of such a system are considerable. Enough dynamic range is available to make accurate recordings of the high amplitude impulses which occur relatively infrequently but still contain most of the energy in the noise process. The noise can be played back at any desired center frequency, with the original phase information retained. This makes it useful for system simulation studies and detailed analysis by computer data systems too large or expensive to be carried in the van. Software has been developed which obtains all of the above-mentioned (section 2) amplitude and time statistics from such recordings. The use of a well-analyzed noise sample in system simulation studies provides an accurate means of comparing theoretical performance with actual performance.

Another available piece of equipment measures the correlation coefficient between two noise envelopes. This equipment has been used to obtain information on spatial and directional correlation, and the correlation between the vertical and horizontal components of the noise. The correlator is a wide dynamic range device with inputs at 455 kHz. It not only provides the product of the two channels, but measures the average voltage and rms voltage in each channel, which is necessary to obtain the correlation coefficient and permits combining 10-sec correlation data to calculate the correlation coefficient for larger time intervals. This equipment accurately handles noise information over a 70 dB instantaneous dynamic range. Automatic gain control and integrate-and-dump circuitry are responsible for the wide dynamic range

performance of this device. The correlation coefficient C_{12} between the two received noise waveforms is

$$C_{12} = \frac{\langle v_1 v_2 \rangle - \langle v_1 \rangle \langle v_2 \rangle}{(\langle v_1^2 \rangle - \langle v_1 \rangle^2)^{\frac{1}{2}} (\langle v_2^2 \rangle - \langle v_2 \rangle^2)^{\frac{1}{2}}} , \quad (A1)$$

where v_1 and v_2 are the detected inputs to the two channels and $\langle \cdot \rangle$ denotes the time average. Many commercial correlators provide only the first term of the numerator. If the noise process is stationary over the proper time period (or if one has a means of continually replaying the same noise samples), the denominator can be measured and system gains set to make the denominator = 1. If the signals are also zero-mean signals, then the correlation coefficient does reduce to one term, $\langle v_1 v_2 \rangle$. Unfortunately, a radio noise envelope is neither zero-mean nor stationary over the proper time period, necessitating measurement of all of the quantities necessary to calculate (A1).

Equation (A1) may be rewritten as

$$C_{12} = \frac{\left(\frac{\langle v_1 v_2 \rangle}{\langle v_1^2 \rangle^{\frac{1}{2}} \langle v_2^2 \rangle^{\frac{1}{2}}} \right) \left(\frac{\langle v_1^2 \rangle^{\frac{1}{2}} \langle v_2^2 \rangle^{\frac{1}{2}}}{\langle v_1 \rangle \langle v_2 \rangle} \right) - 1}{\left(\frac{\langle v_1^2 \rangle}{\langle v_1 \rangle^2} - 1 \right)^{\frac{1}{2}} \left(\frac{\langle v_2^2 \rangle}{\langle v_2 \rangle^2} - 1 \right)^{\frac{1}{2}}} . \quad (A2)$$

Putting this more explicitly in terms of the quantities which the correlator measures (fig. A3), we have

$$C_{12} = \frac{ACE - 1}{[(A^2 - 1)(E^2 - 1)]^{\frac{1}{2}}} = \frac{BCD - BD/AE}{[(B^2 - B^2/A^2)(D^2 - D^2/E^2)]^{\frac{1}{2}}} , \quad (A3)$$

where

$$A = v_{d1} = \frac{\langle v_1^2 \rangle^{\frac{1}{2}}}{\langle v_1 \rangle} ,$$

$$B = v_{rms1} = \langle v_1^2 \rangle^{\frac{1}{2}} ,$$

$$C = \frac{\langle v_1 v_2 \rangle}{v_{rms1} v_{rms2}} , \quad (A4)$$

$$D = v_{rms2} = \langle v_2^2 \rangle^{\frac{1}{2}} ,$$

$$E = v_{d2} = \frac{\langle v_2^2 \rangle^{\frac{1}{2}}}{\langle v_2 \rangle} .$$

Equation (A3) gives the correlation coefficient for a single 10-sec period, based on the quantities measured in that period. The correlation coefficient for any longer time period can be computed from the five values recorded each 10 sec in the following manner. The correlation coefficient, C_{12T} , for some time period, T , consisting of n 10-sec periods is

$$C_{12T} = \frac{\sum_{i=1}^n B_i C_i D_i - \frac{1}{n} \sum_{i=1}^n \frac{B_i}{A_i} \sum_{i=1}^n \frac{D_i}{E_i}}{\left(\left[\sum_{i=1}^n B_i^2 - \frac{1}{n} \left(\sum_{i=1}^n \frac{B_i}{A_i} \right)^2 \right] \left[\sum_{i=1}^n D_i^2 - \frac{1}{n} \left(\sum_{i=1}^n \frac{D_i}{E_i} \right)^2 \right] \right)^{\frac{1}{2}}} . \quad (A5)$$

The calibration equipment completes the normal van installation. The primary calibration relates the rms output to F_a , the equivalent

noise power spectral density available from a short, lossless antenna. All other calibrations are maintained relative to this value. The basic calibration for the rms channels consists of two steps. One step is the calibration of the system from the preamp input to the recorded output by means of a known input from a noise diode. This provides a relationship between the recorded voltage level and F_a , required at the preamp input to give the output reading. Since both the noise process and the calibration source are broad-band phenomena, the calibration with the noise diode eliminates any bandwidth problems in obtaining an accurate calibration. The second step in the basic calibration procedure is to determine the antenna circuit losses up to the preamp. This is accomplished by using a CW generator connected first to a permanently installed calibration stub antenna and then connected to the preamplifier input, where the noise diode calibration signal is injected. By knowing the relation between the two CW inputs, the self-impedance of the antenna and the calibration stub, and the mutual impedance between the two, the antenna circuit losses can be determined (Ahlbeck et al., 1958, "Instruction Book for ARN-2 Radio Noise Recorder," NBS Report 5545). The calibration of the other three moments is accomplished by setting the gains such that, for a CW signal, V_d , L_d , and Q_d are all equal to zero. The DM-2 is calibrated by relating one of the 15 levels relative to a given rms value, which in turn can be related to the available power from a lossless antenna. The same type of calibration is used on the analog tape recording system by recording a CW reference level on the tape which is related to the noise rms level.

Calibration measurements are made at the beginning and end of each run. While the recording equipment has been stabilized as much as possible, some variation in gain may occur over the measurement period. The two calibrations are averaged to find the calibration factors to be used for a block of data.

The accuracy of the recorded data will depend on the precision of the measuring/recording equipment and the calibration accuracy. The overall accuracy of the system is within ± 2 dB for the basic available power measurement. The accuracy of the other measurements is within ± 0.5 dB relative to the power measurement.

The design criteria used in establishing the sensitivity of the recording equipment was based on natural noise levels expected and the lowest values of man-made radio noise expected. A comparison of the system noise factor achieved at each frequency with the design criteria is shown on figure A4. The lowest atmospheric radio noise expected in the United States (CCIR, 1964) occurs during the winter 0800-1200 time block. This is the atmospheric noise curve shown. Also from CCIR (1964), the Galactic radio noise curve and the quiet rural curve for man-made radio noise are shown. Since we obtained this man-made noise curve from data recorded at our world-wide network of atmospheric radio noise recording stations, where each site was carefully chosen to be as free of man-made radio noise as possible, lower levels were not expected to be encountered when using the mobile noise lab. The design criteria, therefore, was the highest of these three curves at each nominal recording frequency. This was fairly well achieved except at 250 MHz, where a 7 dB noise factor was obtained. In some rural areas, the 250 MHz external man-made radio noise was found to be equal to or even less than the system noise factor.

The present radio noise measuring capability is limited in frequency range, with 250 MHz being the highest available channel. Some measurements of man-made radio noise have been made at frequencies up to 2.5 GHz (Automobile Manufacturers Association, 1969, 1970, and 1971; Anzic, 1970). A great deal of information about the various required amplitude and time statistics is needed at these higher frequencies. To

date, even the most basic parameters (such as power spectral density) are little known as to variation with time and location.

Present measurement bandwidths are limited to 4 kHz by the IF band limiting in the receivers. This probably is adequate for frequencies up through the HF band. For measurements at VHF and higher frequencies, considerably wider bandwidths should be used. While the effect of bandwidth reduction on some of the noise statistics can be estimated (Spaulding et al., 1962), extrapolating radio noise statistics measured in a narrower bandwidth to those that would have been present in a wider bandwidth can be questionable since some information on the noise process is lost in bandlimiting. Therefore, bandwidths approximately equal to the widest expected bandwidth used in the various frequency ranges generally should be used for recording the radio noise information. Except for use with the correlator, only vertical monopole antennas have been used. Additional antenna configurations should be employed to obtain direction and polarization information.

Most of the data taken with the radio noise laboratory has been under mobile operating conditions. After selection of an area to be measured, a route was layed out in business or residential areas to include all streets or highways in the area if the whole area was homogeneous. If not, an attempt was made to separate the different types of areas. Once the route was layed out, at least two runs were made, if possible, with the noise laboratory going in opposite directions on the two runs. In some areas this was not possible due to the presence of one-way streets. In the rural areas, only one run was generally made over a given route.

Fixed-location measurements have been made using either self-contained power or commercial power for equipment operation. Additional precautions have been necessary when using commercial power

to insure that the temporary power line is not a source of the recorded noise. When fixed-location measurements are made, the analysis of these data is separated from the analysis of the mobile data.

The choice of frequencies to be used for any given set of measurements and the choice of recordings to be made will depend upon the primary purpose of the measurements. A full set of eight frequencies is used for each measurement run unless a channel is used for the analog tape recorder or the distribution meter recordings which generally will leave only seven channels for the moment measurements. The moments always are measured simultaneously on the channel with the tape recordings or distribution recordings.

REFERENCES, APPENDIX A

- Automobile Manufacturers Association (1969), Ambient electromagnetic survey, Detroit, Michigan, Engineering Report 69-15, Radio Committee, AMA, Detroit, Michigan.
- Automobile Manufacturers Association (1970), Microwave (1-2.5 GHz) radiation from motor vehicles, Engineering Report, Radio Committee, AMA, Detroit, Michigan.
- Automobile Manufacturers Association (1971), Data Package, Radio Interference Tests, South Lyon, Michigan, June 14-17, 1971, AMA, Detroit, Michigan.
- Anzic, G. (1970), Measurements and analysis of radio frequency indigenous noise, IEEE Electromagnetic Compatibility Symposium Record, pp. 183-195.
- CCIR (1964), World distributions and characteristics of atmospheric radio noise, Documents of the Xth Plenary Assembly, Report 322, International Telecommunication Union, Geneva, Switzerland.
- Spaulding, A. D., C. J. Roubique, and W. Q. Crichlow (1962), Conversion of the amplitude probability distribution function for atmospheric radio noise from one bandwidth to another, J. Res. NBS, Vol. 66D, pp. 713-720.

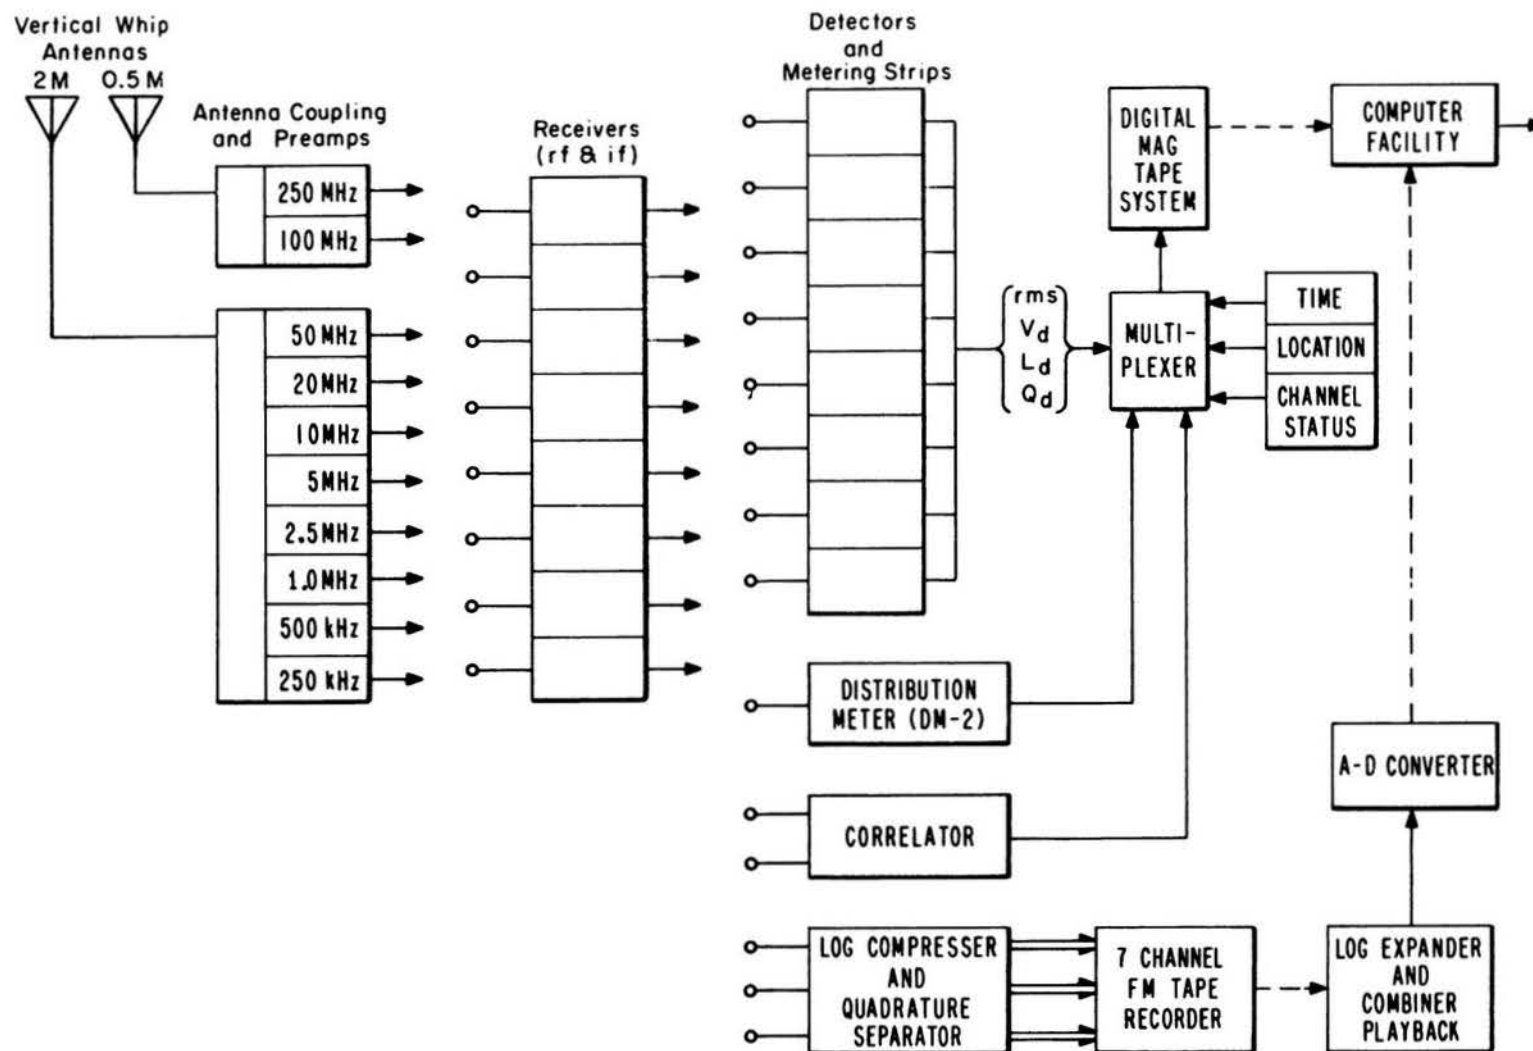


Figure A1. Block diagram of the measuring and recording facilities in the OT/ITS mobile radio noise lab.

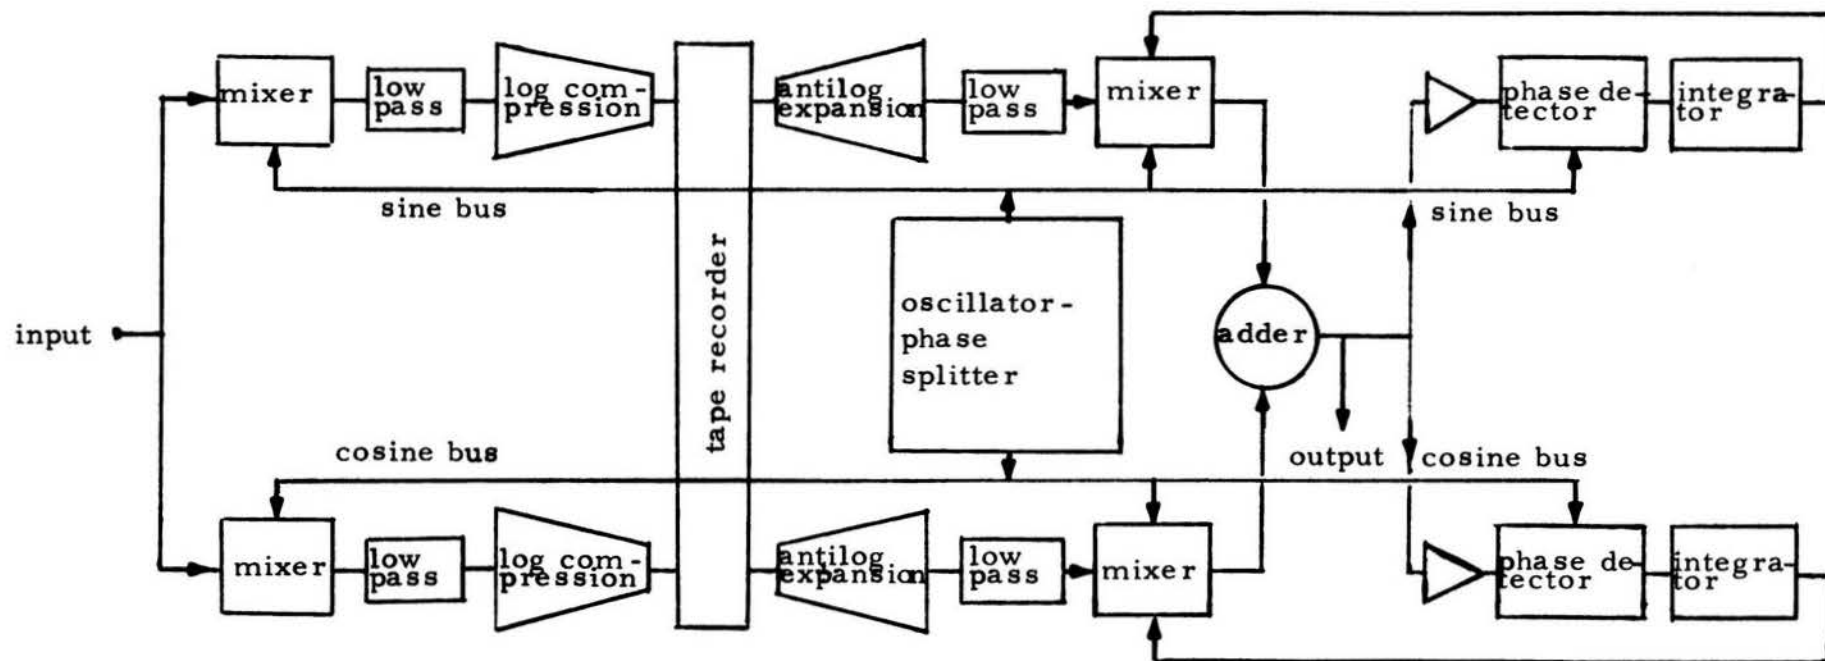


Figure A2. Block diagram of the analog recording-playback system.

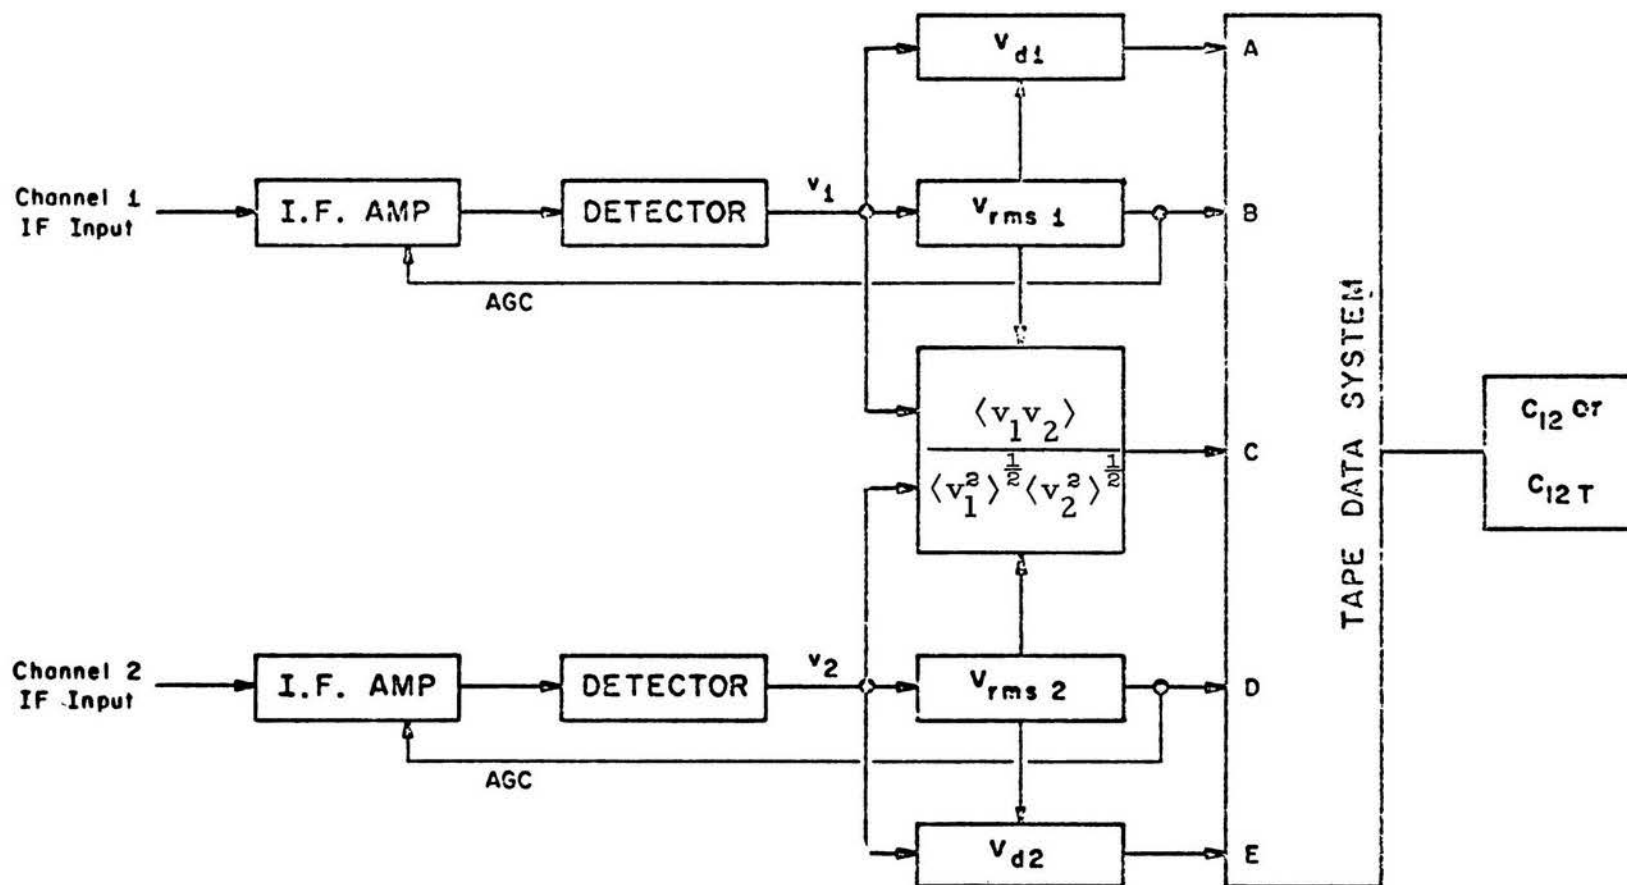


Figure A3. Block diagram of the correlation measurement system.

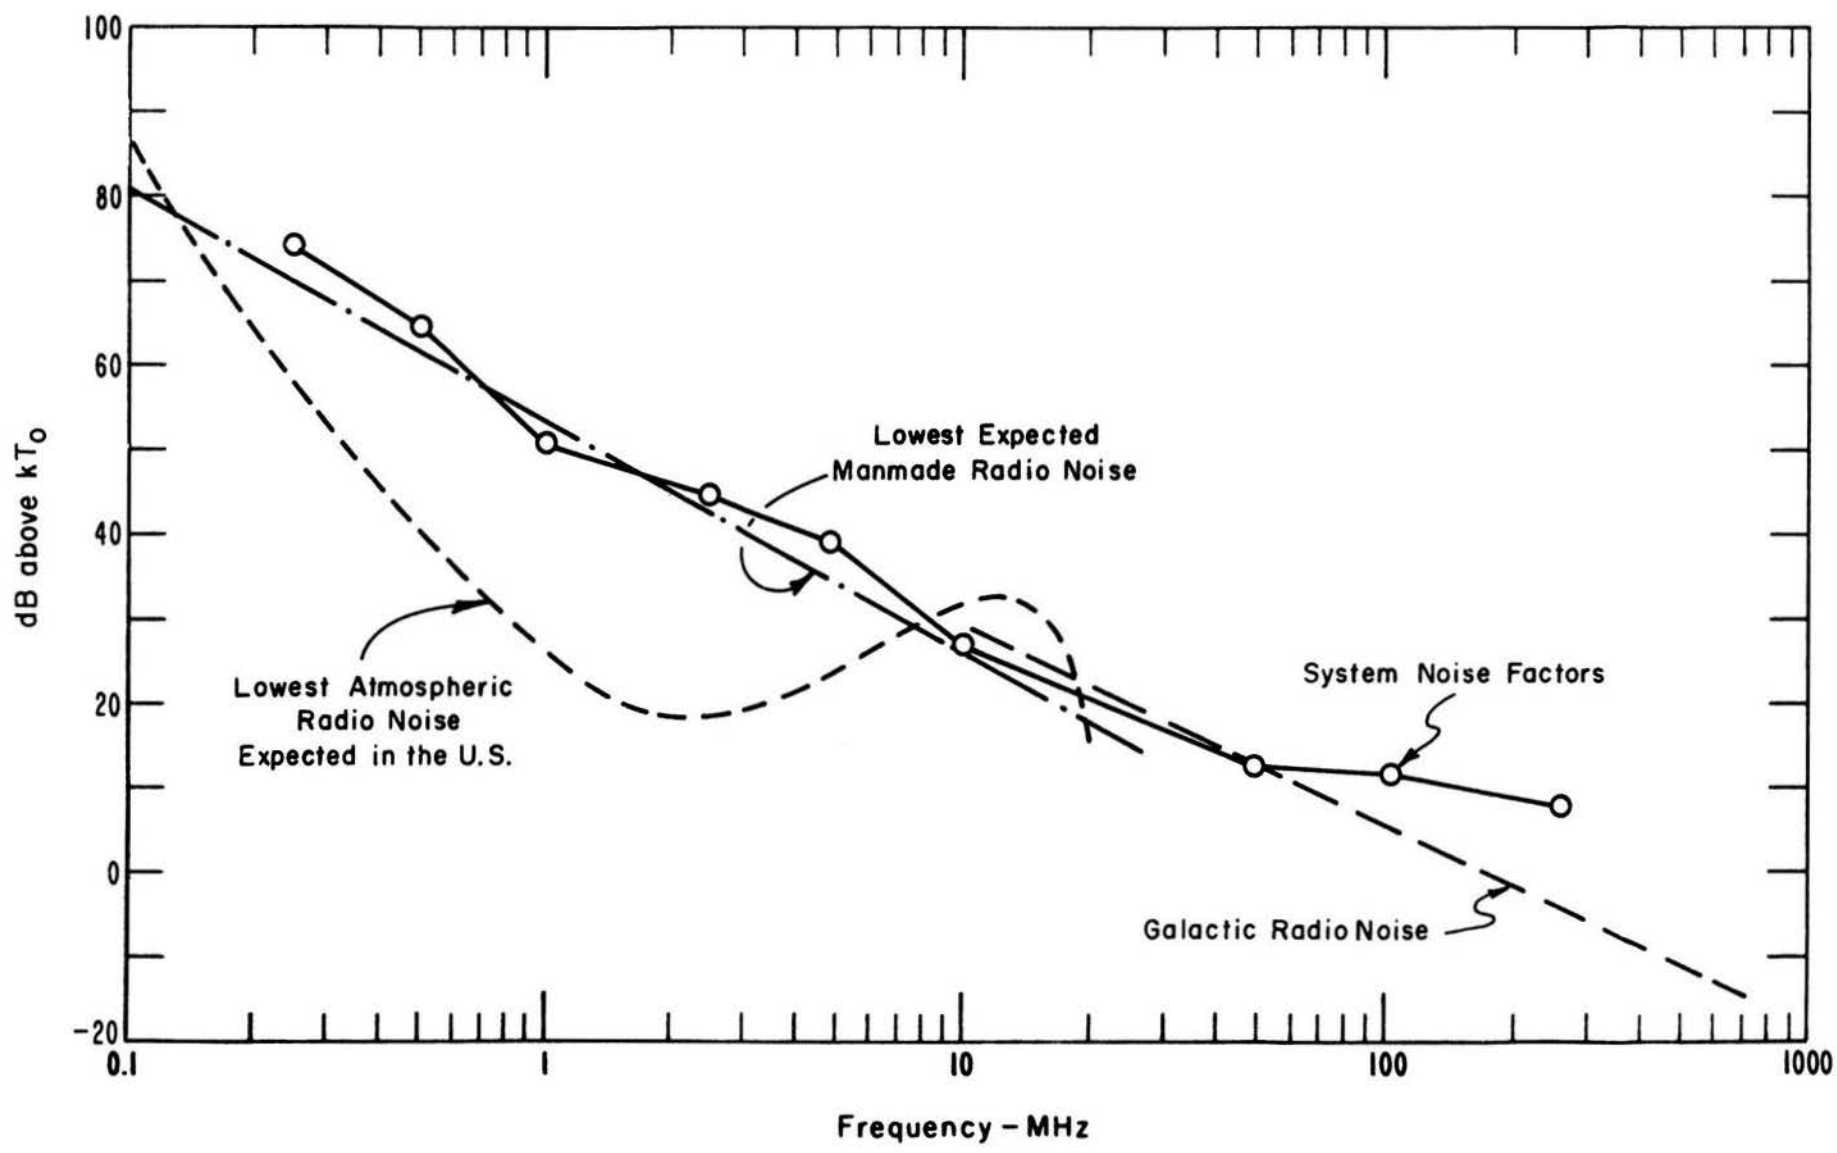


Figure A4. OT/ITS mobile radio-noise lab system noise factors.

APPENDIX B

THE USE OF TRAFFIC DENSITY INFORMATION AS A NOISE PREDICTOR

The levels and other characteristics of man-made radio noise, as has been seen, are quite variable with location and time. It is not feasible to make long-term measurements at all possible locations, and therefore some prediction of the noise is needed for locations where receiving terminals of various communications systems are planned. As has been shown, a general estimate of the noise environment can be obtained by assuming that the characteristics of the noise will be the same as those measured at another place similar in nature to the particular area of interest. If additional information is available for the receiving terminal location on distribution of noise sources and the amount of radiation from these sources, a much better estimate of the radio noise environment could be obtained. Going one step further, a valid estimate of future changes in these sources would give a good estimate of the expected future environment. It is not generally possible to actually catalog all noise sources in a given area that would affect a given system.

In 1968 the Institute for Telecommunication Sciences completed a detailed noise measurement program in San Antonio, Texas. The noise measurements were made under mobile conditions on most of the thoroughfares within specified areas called SLA's (standard location area). The SLA's are areas defined by the Census Bureau for counting population and generally vary between 1 and 5 square miles in area. Various SLA's were chosen to give as wide a range of population density as possible. Figure B1 shows, as an example, the lack of correlation at 5 MHz between the average noise level, $F_{a\mu}$, within an SLA and the population density of that SLA. The $F_{a\mu}$ is the mean of

all F_a values measured within an SLA. Similar results were obtained at the other frequencies of measurement (250 kHz to 48 MHz). Figure B2 shows the linear regression of $F_{a\mu}$ at 48 MHz for 26 thoroughfares with the average hourly traffic count. Here, $F_{a\mu}$ denotes the mean of all F_a values measured along the thoroughfare. The traffic count was obtained by averaging the traffic counts at various locations along the thoroughfares. These counts were obtained from past traffic records. Figure B3 shows the correlation coefficient and its 95 percent confidence bound as a function of frequency for $F_{a\mu}$ versus the average vehicular density for all the measurements taken (Spaulding et al., 1971). More recent measurements have shown the same high correlation at 102 and 250 MHz. Figure B4 also shows the correlation of noise level with traffic density. This figure shows three days of continuous measurements taken 100 ft from the center of Broadway. Broadway is the highway directly to the east of the Department of Commerce, Boulder, Laboratories. Comparing the traffic count (10 log vehicles/hr) with the received noise power, one sees obvious correlation at 20 and 48 MHz and an obvious lack of correlation at 10 MHz. At 10 MHz, the noise is primarily due to power lines in the area. Figure B4 shows the "instantaneous" correlation for a given highway, that is, the traffic density was measured simultaneously with the noise measurements. Figure B3, on the other hand, shows the correlation of the average measured F_a 's along a large number of thoroughfares with the average traffic density on these thoroughfares (for the time of day for which the measurements were taken) obtained from past traffic studies.

Traffic counts for most highways generally are available from traffic or highway engineering departments. Also the expected growth and change in traffic patterns are used for highway planning and are available. Using this information, an estimate of the man-made noise

levels can be obtained for present traffic conditions and for changes due to expected changes in traffic density.

We can make use of the additivity of power to calculate the received noise at a distance, d , from a highway. If many highways, or many lanes of one highway are involved, the total power spectral density can be obtained by adding the contributions from each. Therefore, without loss of generality, we will consider a single highway, straight and infinite in extent. Of course, the automobiles far away (along the highway) from the receiving point of interest contribute negligible power to the total.

To calculate the received noise power spectral density at a distance, d , from a highway, let x be the power spectral density radiated from a single automobile as measured at some distance, d_m . Figures B5 and B6 show the distribution of the radiated power spectral density, F_a , from 958 individual automobiles measured by OT/ITS at 50 ft for frequencies of 20 and 48 MHz. A log normal distribution (dB values normally distributed) is a good approximation for the distribution of x , and figures B5 and B6 show the best fit normal distribution, along with its mean, μ (dB), and standard deviation, σ (dB).

The distribution of y , $y = 10 \log x$, is

$$p(y) = \frac{1}{\sqrt{2\pi}\sigma} \exp \left[-\frac{(y - \mu)^2}{2\sigma^2} \right], \quad -\infty \leq y \leq \infty. \quad (B1)$$

Therefore, the distribution of x is

$$p(x) = \frac{4.343}{x\sigma\sqrt{2\pi}} \exp \left[-\frac{1}{2\sigma^2} (10 \log x - \mu)^2 \right], \quad 0 \leq x \leq \infty, \quad (B2)$$

and the mean value of x , $\bar{x}$, and the variance of x , $\text{Var}[x]$, are given by

$$\bar{x} = 10^{0.1\mu + 0.0115\sigma^2}, \quad (B3)$$

and

$$\text{Var}[x] = \left(10^{0.2\mu + 0.023\sigma^2}\right) \left(10^{0.023\sigma^2} - 1\right) . \quad (\text{B4})$$

Since, for surface wave propagation and for distances and frequencies of primary interest here (above 20 MHz), the received power falls off essentially as distance to the fourth power (Norton, 1959), the power, p_i , received from the i^{th} car along the highway is

$$p_i = \frac{x_i d_m^4}{(d^2 + s_i^2)^2} , \quad (\text{B5})$$

where d is the perpendicular distance from the point of interest to the highway, d_m is the distance (outside the induction field) at which x was measured, and s_i is the distance along the highway to the i^{th} car.

At lower frequencies, the power will fall off as distance squared (Norton, 1959), at least for the closer cars which contribute most of the power. We will, therefore, consider the total receiver power, p_T , to be given by

$$p_T = \sum_{i=-\infty}^{\infty} p_i = \sum_{i=-\infty}^{\infty} x_i \left(\frac{d_m^2}{d^2 + s_i^2} \right)^{\ell} , \quad (\text{B6})$$

where $\ell = 1$ or 2 and the x_i are log normally distributed. Depending on the situation (i.e., car density, distance of interest, etc.), we might expect the total power, p_T , to be approximately normally distributed via the central limit theorem. This approximation will be valid for values of p_T around the mean value of p_T , but obviously cannot be correct very far out on the tails of the actual distribution of p_T . In any case, we want to calculate the mean and variance of p_T .

The spacing between cars will have some distribution. In traffic studies, the car spacings are taken usually to be either equal or exponentially distributed. Which car spacing assumption is best will

depend on the particular traffic situations. We will evaluate the mean and variance of p_T (B6) for both cases, starting with equal car spacing, s ; i.e., $s_i = is$.

The mean and variance of p_T are, therefore, given by

$$\bar{p}_T = \bar{x} \sum_{i=-\infty}^{\infty} \left(\frac{d_m^2}{d^2 + (is)^2} \right)^{\ell} \quad (B7)$$

and

$$\text{Var}[p_T] = \text{Var}[x] \sum_{i=-\infty}^{\infty} \left(\frac{d_m^2}{d^2 + (is)^2} \right)^{2\ell}. \quad (B8)$$

For $\ell = 1$ and 2, the above summations can be evaluated in closed form by the standard methods of contour integration and successive differentiation (see also Wheelon, 1954). The results are

$$\sum_{i=-\infty}^{\infty} \frac{d_m^2}{d^2 + (is)^2} = \frac{\pi d_m^2}{s d} \coth \left(\frac{\pi d}{s} \right), \quad (B9)$$

$$\sum_{i=-\infty}^{\infty} \left(\frac{d_m^2}{d^2 + (is)^2} \right)^2 = \frac{\pi d_m^4}{2s d^3} \coth \left(\frac{\pi d}{s} \right) + \frac{\pi^2 d_m^4}{2s^2 d^2} \text{csch}^2 \left(\frac{\pi d}{s} \right), \quad (B10)$$

$$\begin{aligned} \sum_{i=-\infty}^{\infty} \left(\frac{d_m^2}{d^2 + (is)^2} \right)^3 &= \frac{3\pi d_m^6}{8s d^5} \coth \left(\frac{\pi d}{s} \right) + \frac{3\pi^2 d_m^6}{8s^2 d^4} \text{csch}^2 \left(\frac{\pi d}{s} \right) \\ &+ \frac{\pi^3 d_m^6}{4s^3 d^3} \text{csch}^2 \left(\frac{\pi d}{s} \right), \end{aligned} \quad (B11)$$

and

$$\begin{aligned}
\sum_{i=-\infty}^{\infty} \left(\frac{d_m^2}{d^2 + (i s)^2} \right)^4 &= \frac{5\pi d_m^8}{16s d^7} \coth\left(\frac{\pi d}{s}\right) + \frac{5\pi^2 d_m^8}{16s^2 d^6} \operatorname{csch}^2\left(\frac{\pi d}{s}\right) \\
&\quad + \frac{\pi^3 d_m^8}{4s^3 d^5} \operatorname{csch}^2\left(\frac{\pi d}{s}\right) \coth\left(\frac{\pi d}{s}\right) \\
&\quad + \frac{\pi^4 d_m^8}{24s^4 d^4} \left[\operatorname{csch}^4\left(\frac{\pi d}{s}\right) \right. \\
&\quad \left. + \operatorname{csch}^2\left(\frac{\pi d}{s}\right) \coth^2\left(\frac{\pi d}{s}\right) \right] . \tag{B12}
\end{aligned}$$

Note, now, that for $d/s > 1$, $\coth(\pi d/s) \approx 1$ and $\operatorname{csch}(\pi d/s) \approx 2 \exp(-\pi d/s) \approx 0$, so we obtain the simple results (for the case $d/s > 1$) for (B9):

$$\sum \cong \frac{\pi d_m^2}{s d} ;$$

for (B10):

$$\sum \cong \frac{\pi d_m^4}{2s d^3} ;$$

for (B11):

$$\sum \cong \frac{3\pi d_m^6}{8s d^5} ;$$

and for (B12):

$$\sum \cong \frac{5\pi d_m^8}{16s d^7} . \tag{B13}$$

We can now easily compute $\bar{p}_T$ and $\operatorname{Var}[p_T]$ from the distribution of power radiated from individual vehicles for whichever propagation law ($\ell = 1, 2$) is appropriate.

As an example during quiet hours, consider (fig. B4) 48 MHz at 0300, Thursday. The traffic count was about 31.6 vehicles per hour. The speed limit on Broadway, where the measurements were taken, is 35 mph; therefore,

$$s = \frac{5280 \times 35}{31.6} = 5850 \text{ ft/vehicle} .$$

Since the distance at which the measurements were made (100 ft) is less than s , we cannot use the approximation (B13) and must use (B10). From figure 6 we have, for 48 MHz, $\mu = 20.2$ dB and $\sigma = 10.8$ dB. So from (B3),

$$\bar{x} = 10^{3.36} = 2170 \text{ kT}_o \left(1 \text{ kT}_o = 3.97 \times 10^{-21} \frac{\text{watts}}{\text{Hz}} \right) .$$

From (A10), with $d = 100$ ft, $d_m = 50$ ft, $s = 5850$ ft, we obtain

$$\sum_{i=-\infty}^{\infty} \left(\frac{d_m^2}{d^2 + (i s)^2} \right)^2 = 0.0627 .$$

Therefore,

$$\bar{P}_T = 2170 \times 0.0627 = 136 \text{ kT}_o$$

$$\bar{P}_T = 21.3 \text{ dB} > \text{kT}_o .$$

The actual measured value was 18 dB $> \text{kT}_o$. Likewise, at 0300, Thursday, for 20 MHz, we obtain $\bar{P}_T = 30.6$ dB $> \text{kT}_o$, while the measured value was 31 dB $> \text{kT}_o$.

If we now consider 48 MHz, 0800, Thursday, we obtain from (B10) (with $\bar{x} = 2170 \text{ kT}_o$, $d = 100$ ft, $d_m = 50$ ft, $s = 185$ ft) that $\bar{P}_T = 21.8$ dB $> \text{kT}_o$, while the measured value was 26.5 dB. The $\bar{P}_T$ plus one standard deviation [from (B12)] is 28.5 dB.

In general, the lower measured values are matched quite well by the calculated values, but the calculated values are substantially lower (up to 8 dB) than the measured values during the busiest portions of the day. This is due, in part at least, to noise contributions from the many noise sources other than the automobile present on the laboratory grounds during the working day. There are also many other considerations which we will discuss later.

We will now evaluate the mean of p_T (B6) when the car spacings are exponentially distributed. The distribution of s_i is (Parzen, 1962)

$$p(s_i) = \frac{s_i^{i-1}}{s^i (i-1)!} e^{-s_i/s}, \quad (B14)$$

and the mean value of s_i is given by $i s$. Then, with E denoting the mean value operation,

$$\begin{aligned} \bar{p}_T &= E[p_T] = E \sum_{i=1}^{\infty} x_i \left(\frac{d_m^2}{d^2 + s_i^2} \right)^\ell \\ &= d_m^{2\ell} E[x] \left\{ \frac{1}{d^{2\ell}} + 2 \sum_{i=1}^{\infty} E \left[\left(\frac{1}{d^2 + s_i^2} \right)^\ell \right] \right\}. \end{aligned} \quad (B15)$$

Now

$$\sum_{i=1}^{\infty} E \left[\left(\frac{1}{d^2 + s_i^2} \right)^\ell \right] = \sum_{i=1}^{\infty} \int_0^{\infty} \frac{1}{(d^2 + z^2)^\ell} \frac{z^{i-1}}{s^i (i-1)!} e^{-z/s} dz. \quad (B16)$$

Interchanging summation and integration, we obtain the general result from (B15) and (B16),

$$\bar{p}_T = \bar{x} \left[\frac{d_m^{2\ell}}{d^{2\ell}} + \frac{d_m^{2\ell} (2\ell - 2)! \pi}{s^{2\ell-2} (\ell - 1)! (\ell - 1)! d^{2\ell-1}} \right]. \quad (B17)$$

Note, that, with the exception of the term $d_m^{2\ell}/d^{2\ell}$, (B17) is identical to (B13). The term $d_m^{2\ell}/d^{2\ell}$, however, as we will discuss later, often dominates. While the above (B17) gives the mean value of p_T , the variance appears to be much more difficult to calculate and is not done here.

On figure B4, again, equation B17, with $\ell = 2$, gives an average value of F_a of 21.5 dB compared with the previous value of 21.3 dB $> kT_o$ for 0300, Thursday, 48 MHz. Likewise, (B17) gives 30.8 dB $> kT_o$ compared with the previous 30.6 dB for 0300, Thursday, 20 MHz. For 48 MHz, 0800, Thursday, (B17) gives 24 dB $> kT_o$ compared with the previous 21.8 dB. With the very limited measurements available, it would appear that (B17) gives a somewhat more accurate prediction of the mean value of p_T for high traffic density.

In the above analysis, there are a number of points to consider. First, we note that the results are heavily dependent on the propagation. Results have been given for $\ell = 1$ and 2, i.e., inverse distance squared and inverse distance to the fourth power. We would expect $\ell = 1$ to apply for low frequencies and $\ell = 2$ to apply at the higher frequencies for the distances of interest, but recent measurements (Shafer et al., 1972) at 900 MHz by RCA have indicated that, in an urban area, ℓ can vary anywhere between 0.75 and 2.25 for the distances of interest. Once one decides what propagation law fits his situation, good approximations probably can be made by interpolating between the results given here for integer values of ℓ .

In spite of the close fit between the lowest measured noise values and the predicted values, the results are based on the assumption that there is essentially always one automobile at a distance, d , from the receiver. This is the $d_m^{2\ell}/d^{2\ell}$ terms in (B17) and is also inherent in (B9) through (B12). The result is that this term dominates, giving

essentially the same $\bar{p}_T$ for any traffic density between 10 and 200 vehicles/hour (at normal speeds). For proper consideration of very low traffic densities, this assumption would need to be modified. The analysis gives results [(B13) and (B17)] which should be valid for relatively high traffic densities.

In order to use the above results, knowledge of the power radiated from individual automobiles is required. From (B3) the mean and standard deviations of F_a are required for any particular frequency of interest. There appears to be very little such information (other than that given here) available. Measurements of individual automobiles have been made by the Automobile Manufacturers Association (AMA, 1969, 1970, 1971), but, in general, parameters other than power were measured; in any case, a very limited number of individual vehicles were measured. Detailed measurements of individual vehicles were recently made by Stanford Research Institute (Shepherd et al., 1973). References to some earlier measurements can be found in the bibliographies (Part II of this report and Thompson, 1971).

In general, the simple results given here can be used to obtain good approximations of the noise at a receiver site due to automotive traffic in the area. As with any such prediction method, however, the proper input statistics must be available. Here, the requirement is for only the mean and variance of the power spectral density (in dB at some measurement distance) radiated from individual vehicles for the frequency of interest. The traffic density (cars/hr) and the average speed must, of course, also be known.

Finally, it should be noted that all the measurements referred to here were made with vertical monopole antennas. For other antennas the basic expression (B6) can be modified by the antenna gain pattern. When this is done, the analysis can be carried through exactly as before, but, except for special cases, the resulting summations (and integrations) require numerical evaluation.

REFERENCES, APPENDIX B

- Automobile Manufacturers Association (1969), Ambient electromagnetic survey, Detroit, Michigan, Engineering Report 69-15, Radio Committee, AMA, Detroit, Michigan.
- Automobile Manufacturers Association (1970), Microwave (1-2.5 GHz) radiation from motor vehicles, Engineering Report, Radio Committee, AMA, Detroit, Michigan.
- Automobile Manufacturers Association (1971), Data Package, Radio Interference Tests, South Lyon, Michigan, June 14-17, 1971, AMA, Detroit, Michigan.
- Norton, K. A. (1959), Transmission loss in radio propagation II, National Bureau of Standards Technical Note 12.
- Parzen, E. (1962), Stochastic Processes, Holden-Day, Inc., p. 134.
- Shafer, J., C. S. Haplan, and S. N. Honicknan (1972), Mobile radio propagation statistics at 900 MHz in New York City, RCA Laboratories, Princeton, N.J. -- talk given at the Microwave Mobile Radio Symposium, Department of Commerce Laboratories, Boulder, Colorado, March 1-3, 1972.
- Shepherd, R. A., J. C. Gaddie, V. E. Hatfield, and G. H. Hagn (1973), Measurement of automobile ignition noise at HF, Final Report, Contract No. 0039-71-A-0223, Delivery Order 0003, Stanford Research Institute, Menlo Park, California 94025.
- Spaulding, A. D., W. H. Ahlbeck, and L. R. Espeland (1971), Urban residential man-made radio noise analysis and predictions, OT/ITS Telecommunications Research and Engineering Report 14.
- Thompson, W. I., III (1971), Bibliography on ground vehicle communications and control: A KWIC index, Urban Mass Transportation Administration, U.S. Department of Transportation, Washington, D.C., Report No. DOT-UMTA-71-3.
- Wheelon, A. D. (1954), A short table of summable series, The Ramo-Wooldridge Corporation, Los Angeles, California.

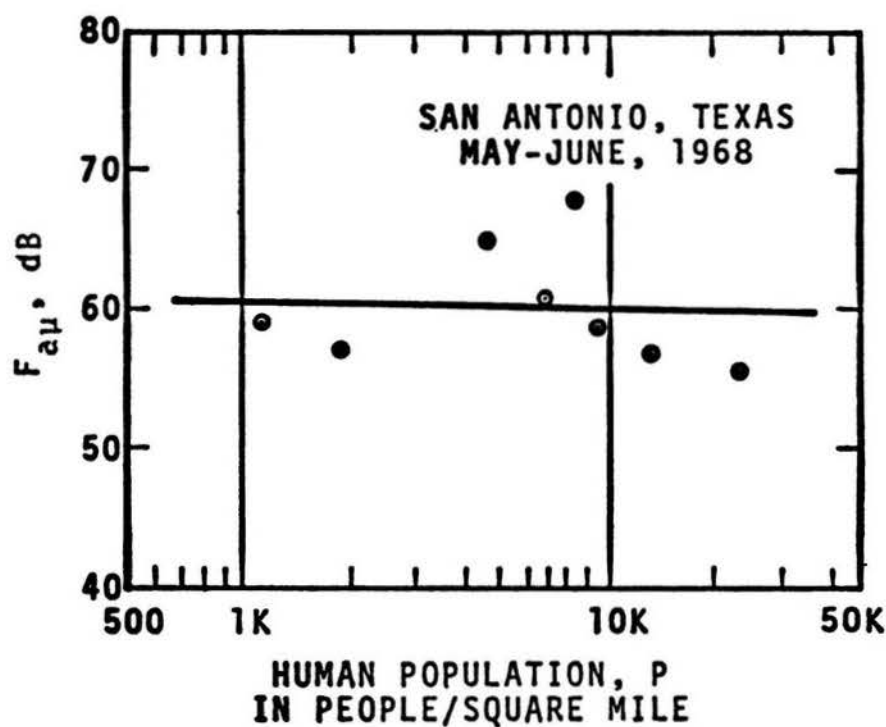


Figure B1. Regression of 5.0 MHz F_{au} with log population density of SLA's.

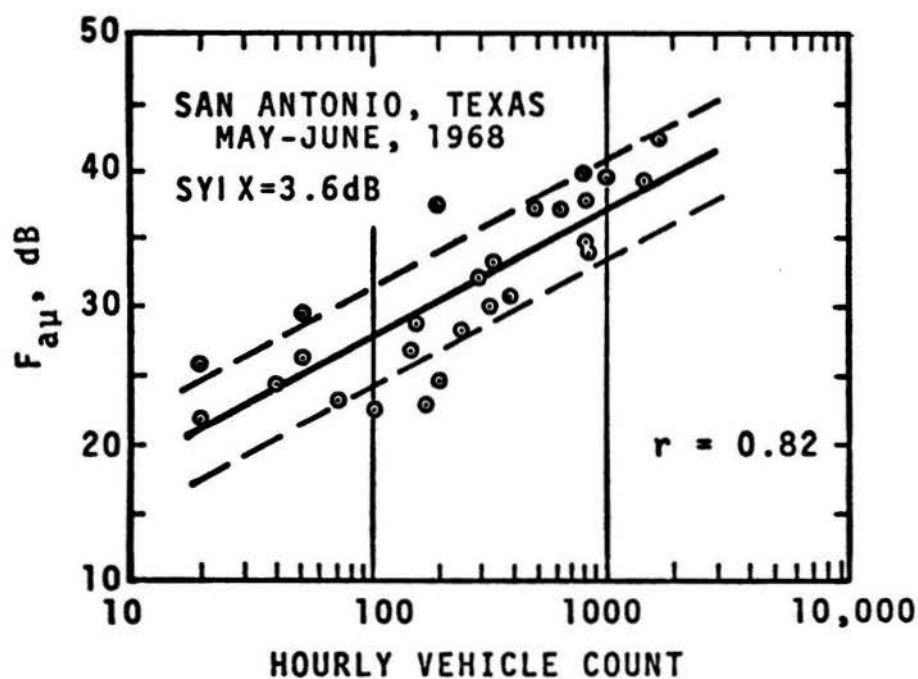


Figure B2. Linear regression of F_{au} vs. log hourly traffic count along 26 thoroughfares at 48 MHz.

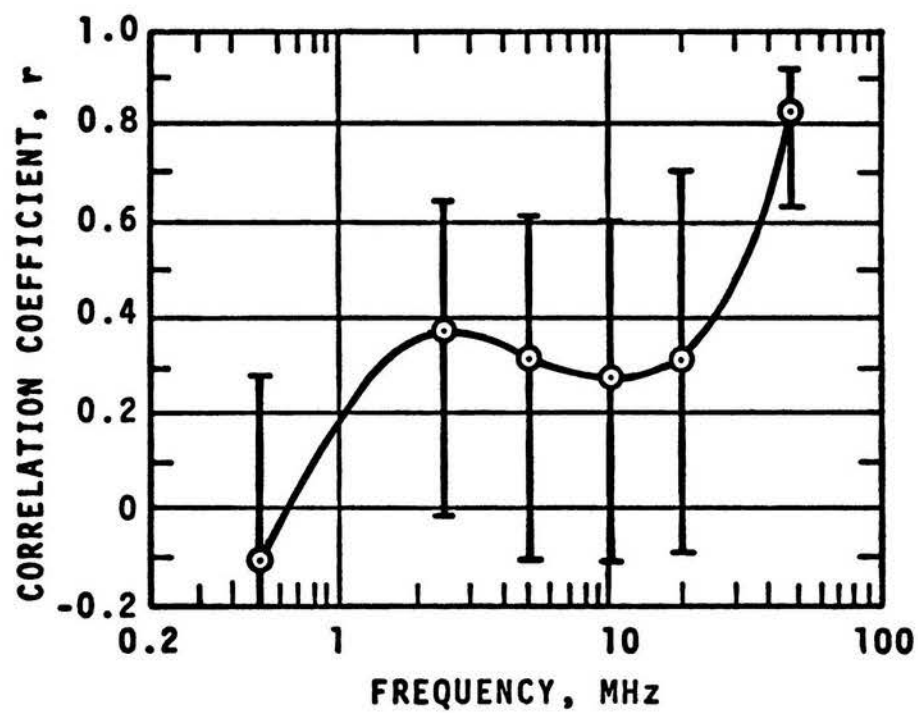


Figure B3. Correlation coefficients along with the 95 percent confidence limits for each of the measurement frequencies, $F_{a\mu}$ vs. log hourly traffic count.

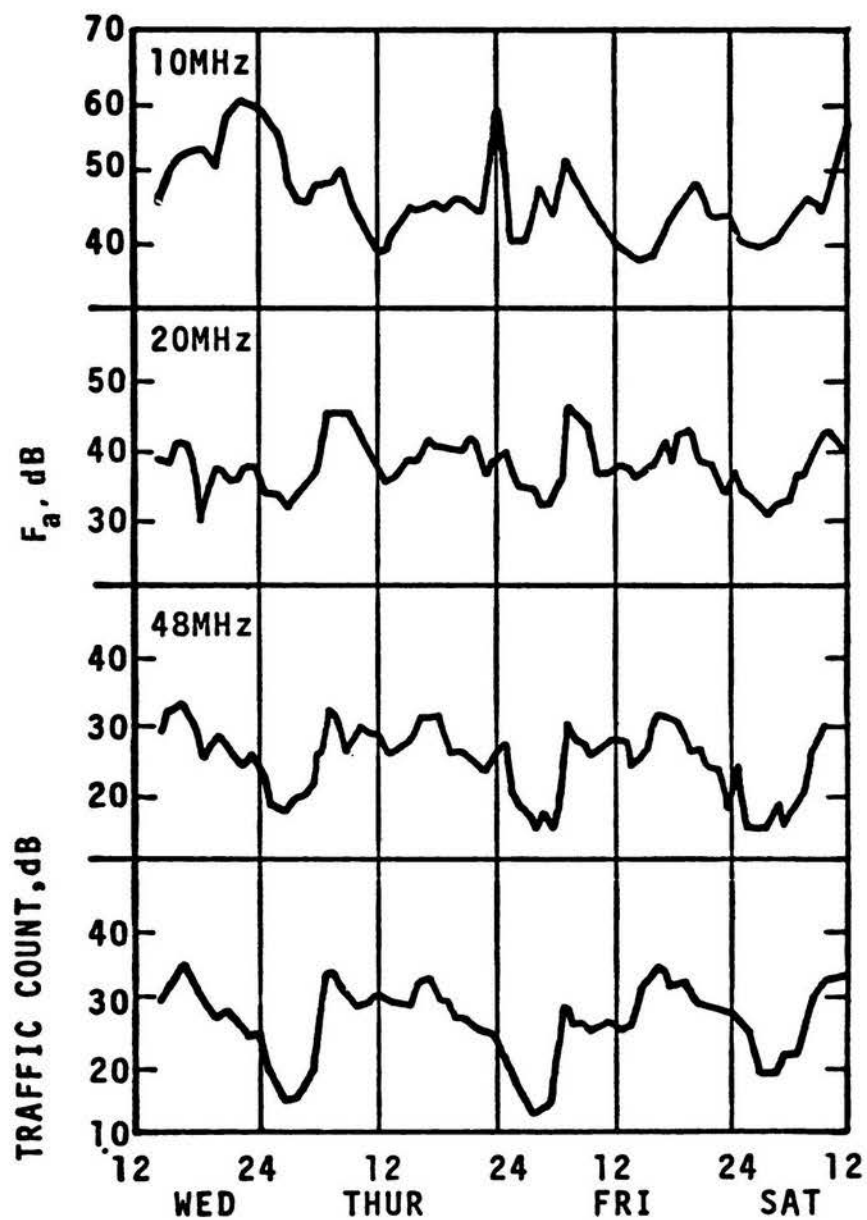


Figure B4. Hourly median values of radio noise power and hourly traffic count. Broadway, Boulder, Colorado, October 25-27, 1967, noise values recorded 100 ft west of highway center.

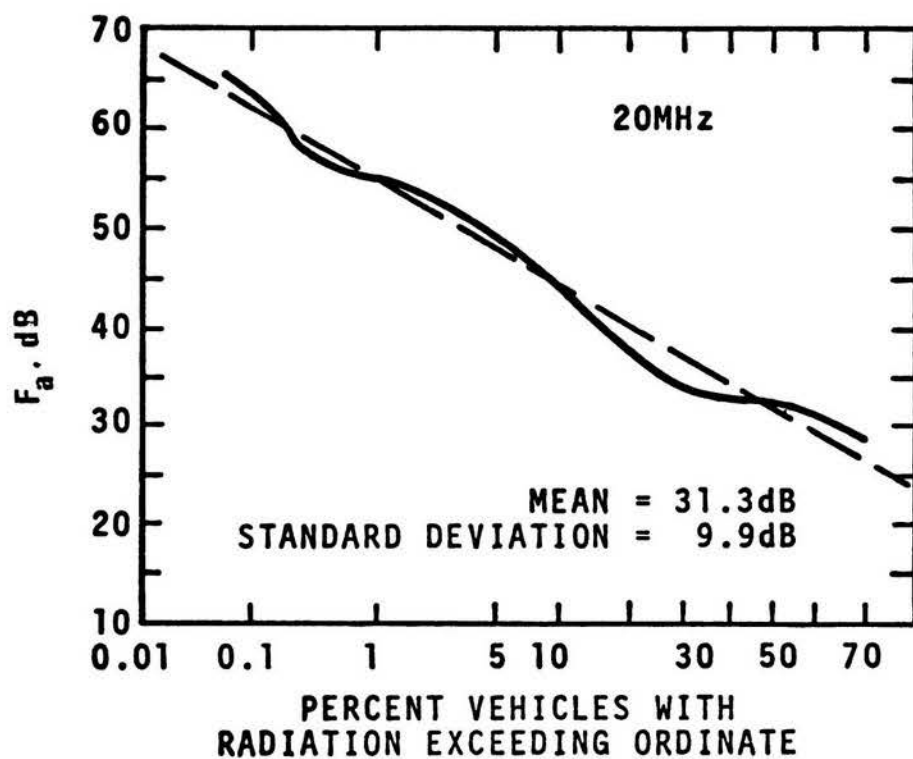


Figure B5. Distribution of radio noise power at 20 MHz radiated from 958 individual vehicles, values measured at 50 ft from vehicle.

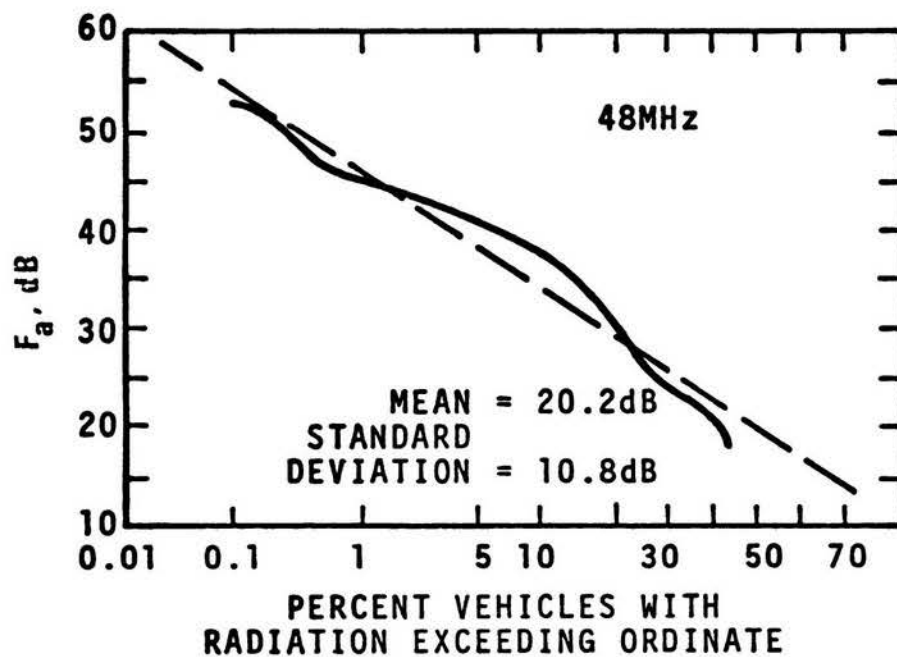


Figure B6. Distribution of radio noise power at 48 MHz radiated from 958 individual vehicles, values measured at 50 ft from vehicle.

BIBLIOGRAPHIC DATA SHEET

1. PUBLICATION OR REPORT NO. OTR 74-38		2. Gov't Accession No.	3. Recipient's Accession No.
4. TITLE AND SUBTITLE Man-Made Radio Noise Part 1: Estimates for Business, Residential, and Rural Areas		5. Publication Date June, 1974	
		6. Performing Organization Code OT/ITS	
7. AUTHOR(S) Arthur D. Spaulding and Robert T. Disney		9. Project/Task/Work Unit No.	
8. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Department of Commerce Office of Telecommunications Institute for Telecommunication Sciences 325 Broadway, Boulder, Colorado 80302		10. Contract/Grant No.	
		12. Type of Report and Period Covered	
11. Sponsoring Organization Name and Address U.S. Department of Commerce Office of Telecommunications 1325 G Street, N.W. Washington, D.C. 20005		13.	
14. SUPPLEMENTARY NOTES			
15. ABSTRACT (A 200-word or less factual summary of most significant information. If document includes a significant bibliography or literature survey, mention it here.) The Office of Telecommunications, Institute for Telecommunication Sciences (OT/ITS), over the past several years, has accumulated a data base of man-made radio noise measurements in the frequency range from 250 kHz through 250 MHz taken in a number of geographical areas. This data base has been analyzed to provide estimates of the expected characteristics of man-made radio noise in business, residential, and rural areas. The parameters used are the average available power spectral density, the ratio of the rms to the average voltage of the noise envelope, and the ratio of the rms to the average logarithm of the envelope voltage. The variation of these parameters as a function of frequency, location, and time are shown and discussed. Examples of amplitude and time statistics of the received man-made radio noise process also are shown and discussed. The use of the estimates is shown (principally by references in Pt. II, Bibliography) in the solution of problems encountered in frequency management & telecommunication system design.			
16. Key words (Alphabetical order, separated by semicolons) Impulsive noise; man-made radio noise; noise characteristics; noise levels; non-Gaussian noise; system performance.			
17. AVAILABILITY STATEMENT ☒ UNLIMITED. ☐ FOR OFFICIAL DISTRIBUTION.		18. Security Class (This report) Unclassified	20. Number of pages 133
		19. Security Class (This page) Unclassified	21. Price:

MAN-MADE RADIO NOISE

PART II:

BIBLIOGRAPHY OF MEASUREMENT DATA, APPLICATIONS, AND MEASUREMENT METHODS



OT

U.S. DEPARTMENT OF COMMERCE / Office of Telecommunications

MAN-MADE RADIO NOISE

PART II: BIBLIOGRAPHY OF MEASUREMENT DATA, APPLICATIONS, AND MEASUREMENT METHODS

A.D. SPAULDING
R.T. DISNEY
A.G. HUBBARD



U.S. DEPARTMENT OF COMMERCE
Rogers C.B. Morton, Secretary

Betsy Ancker-Johnson, Ph. D.
Assistant Secretary for Science and Technology

OFFICE OF TELECOMMUNICATIONS
John M. Richardson, Acting Director



May 1975

**UNITED STATES DEPARTMENT OF COMMERCE
OFFICE OF TELECOMMUNICATIONS
STATEMENT OF MISSION**

The mission of the Office of Telecommunications in the Department of Commerce is to assist the Department in fostering, serving, and promoting the nation's economic development and technological advancement by improving man's comprehension of telecommunication science and by assuring effective use and growth of the nation's telecommunication resources.

In carrying out this mission, the Office

- Conducts research needed in the evaluation and development of policy as required by the Department of Commerce
- Assists other government agencies in the use of telecommunications
- Conducts research, engineering, and analysis in the general field of telecommunication science to meet government needs
- Acquires, analyzes, synthesizes, and disseminates information for the efficient use of the nation's telecommunication resources.
- Performs analysis, engineering, and related administrative functions responsive to the needs of the Director of the Office of Telecommunications Policy, Executive Office of the President, in the performance of his responsibilities for the management of the radio spectrum
- Conducts research needed in the evaluation and development of telecommunication policy as required by the Office of Telecommunications Policy, pursuant to Executive Order 11556

USCOMM - EARL

TABLE OF CONTENTS

	<u>Page</u>
ABSTRACT	1
INTRODUCTION	1
I. MAN-MADE RADIO NOISE MEASUREMENTS AND DATA	5
II. APPLICATIONS OF RADIO NOISE DATA TO SYSTEMS ANALYSIS, MATHEMATICAL MODELING OF RADIO NOISE PROCESSES, AND ENVIRONMENTAL MODELING	41
III. RADIO NOISE MEASUREMENT EQUIPMENT AND METHODS	71
IV. MAN-MADE RADIO NOISE - GENERAL	85
V. ATMOSPHERIC RADIO NOISE, GENERAL CONSIDERA- TIONS RELATED TO MAN-MADE RADIO NOISE	99

MAN-MADE RADIO NOISE
PART II: BIBLIOGRAPHY OF MEASUREMENT DATA,
APPLICATIONS, AND MEASUREMENT METHODS

A. D. Spaulding¹, R. T. Disney¹, A. G. Hubbard²

The Office of Telecommunications, Institute for Telecommunication Sciences (OT/ITS), over the past several years, has accumulated a data base of man-made radio noise measurements in the frequency range from 250 kHz to 250 MHz taken in a number of geographical areas. Man-Made Radio Noise, Part I (OT Report 74-38) gives the results of the analysis of this base and provides estimates of the man-made noise levels and characteristics to be expected in typical locations. This part of the report (Part II) is a compilation of references relating to man-made radio noise. This bibliography is divided into five sections: Section I, Measurements and Data; Section II, Applications to Systems and Mathematical Modeling; Section III, Measurement Experiments and Methods; Section IV, General, and Section V, Atmospheric Radio Noise.

Key words: Man-made radio noise, noise characteristics, impulsive noise, system performance, noise measurement, atmospheric radio noise

INTRODUCTION

The previously published report (Man-made radio noise, Part I: Estimates for business, residential, and rural areas, OT Report 74-38, June, 1974) is composed of the results of the analysis of the OT/ITS man-made radio noise data base. The measurements used in that analysis were those taken with the OT/ITS mobile radio noise laboratory over a period of approximately 6 years. Limiting the data, as was done, assured uniformity of the measured parameters, frequency coverage, bandwidth used, data acquisition equipment and methods, and analysis methods

¹ These authors are with the Institute for Telecommunication Sciences Office of Telecommunications, U.S. Dept. of Commerce, Boulder, Colo.

² This author is with the Department of the Army, USAECOM, P & P Directorate, Maryland Procurement Office, 9800 Savage Road, Fort G.G. Meade, Md. (AMSEL-PP-CN-R53).

for all locations from which data were available. At the same time, this limited spectrum coverage to the frequency range between 250 kHz and 250 MHz and the geographical coverage to 103 locations in six states and the District of Columbia.

Since additional information is useful for comparison with the estimates given in OTR 74-38, a compilation of references related to man-made noise has been made. This bibliography gives references to other measurements and data so that frequencies outside the range covered by OTR 74-38 can be investigated. These references are given in section I, "Man-made Radio Noise Measurements and Data." Unfortunately, the majority of the measurement data referenced were taken using peak or quasi-peak measuring equipment. Neither of these parameters can be compared directly, nor converted, to the parameters given in OTR 74-38. Peak and quasi-peak measurement data cannot be used either, in using modern communications theory for system design and analysis. Since such data is the only information available for some locations and frequency ranges, it should provide some general guidance in estimating the man-made radio noise that can be expected.

OTR 74-38 gives some guidance in using the noise estimates in determining system performance. Section II of this bibliography, "Applications of Radio Noise Data to Systems Analysis, Mathematical Modeling of Radio Noise Processes and Environmental Modeling," gives references that give further guidance in system design and analysis in impulsive noise environments.

Section III of the bibliography, "Radio Noise Measurement Equipment and Methods," contains references related to techniques and measurement devices for measuring high dynamic range impulsive phenomena.

There are a number of reports that deal with man-made noise in a general way and which do not logically fit under sections I, II, or III. These include a number of general-interest papers, talks, and articles on the topic of man-made radio noise and its effect on telecommunications, its control from both suppression and legislative standpoints, and general comments on its growth. These references are given in section IV, "Man-made Radio Noise - General."

Since atmospheric noise is, in a statistical sense, similar to many forms of man-made noise, section V, "Atmospheric Radio Noise, General Considerations Related to Man-made Radio Noise," is included. Section IV contains references concerning various aspects of atmospheric noise, but which are directly applicable to man-made noise, or if not directly applicable, closely related to the general questions concerning man-made radio noise.

The references are given alphabetically by first author. They are divided into the above five categories. In many cases, a particular reference could have been put in two or more of these categories. To eliminate duplication, the reference was put in the category in which we felt it probably would prove most useful. To find any particular reference, therefore, all five sections should be checked.

The references given here are not purported to be a complete listing of all the important work on man-made radio noise. If the reader has other references which have not been included, it would be appreciated if he would send them to one of the authors so that they may be included in any future printings of this bibliography.

No attempt has been made to classify information in terms of "good, bad, or indifferent", thus, any discrimination is left to the reader. We have attempted to be complete as possible in compiling these lists; if any references have been left out-and no doubt many have been-this was due to either an oversight or ignorance of their existence. It is hoped that this bibliography will prove useful and that addenda or future revisions can be made to include those references missed this time, and future references as they become available.

In the bibliography, reference is made to OT/ITS Technical Memoranda, ESSA Technical Memoranda, and NBS reports. These publications are of limited distribution and not generally available. They may be available from the respective authors.

Section I.

MAN-MADE RADIO NOISE MEASUREMENTS AND DATA

- Adam, M. (1937), Le vie congres national de protection radio electrique, Paris, Ganie Civil III, No. 2884, 430-432 (Nov. 20).
- Adams, G.E. (1955), Voltage gradients on high voltage transmission lines, Pt. III, AIEE Trans. 74, 5-11 (April).
- Adams, G.E. (1956a), An analysis of the radio-interference characteristics of bundled conductors, Pt. III, AIEE Trans. 75, 1569-1583.
- Adams, G.E. (1966b), The calculation of the radio interference level of transmission lines caused by corona discharges, Pt. III, Power Apparatus and Systems, AIEE Trans. 75, 417-419 (June).
- Adams, G.E., and L.O. Barthold (1960), The calculation of attenuation constants for radio noise analysis of overhead lines, Pt. III, Power Apparatus and Systems, AIEE Trans. 79, No. 51, 975-981.
- Aggers, C.V., and W.E. Pakala (1934), Radio interference from synchronous converters, Elec. J. 31, No. 3, 121-122.
- Aiya, S.V.C., and K.R. Phadke (1955), Atmospheric noise interference to broadcasting in the 3 Mc/s band at Poona, J. Atmosph. Terr. Phys. 7, 254-277.
- Allen, E.W. (1960), Man-made radio noise, the Radio Noise Spectrum, D.H. Menzel, ed. (Harvard Univ. Press, Cambridge, Mass.).
- Amamiya, Y. (1960), Research on radio noises in medium and high frequency regions generated by electric cars, Japanese Natl. Railways, Railway Tech Res. Inst. Quart. Rept. 1, No. 3, 9-19.
- Anzic, G. (1970a), Aerial RF noise measurement in urban areas at UHF frequencies, NASA Lewis Res. Center Doc. N-70-32673.
- Anzic, G. (1970b), Measurements and analysis of radio frequency indigenous noise, IEEE EMC Symposium Record, pp. 183-195.

- Anzic, G. (1970c), Radio frequency noise measurements in urban areas at 480 and 950 MHz, NASA Tech. Memo. TM-X-1972, (March).
- Anzic, G., and C. May (1971), Results and analysis of a combined aerial and ground ultrahigh frequency noise survey in an urban area, NASA Tech. Memo TMX-2244 (April).
- Arima, I., and S. Nagata (1969), Effect of raindrops on DC corona noise, *Denki Gakkai Zasshi (Japan)*, 89, No. 4, pp. 100-107 (April).
- Arthur, M.G. (1967), High frequency noise as related to voltage measurements, Natl. Bur. of Standards, Boulder, Colo. 80302.
- Automobile Manufacturers Assoc. (AMA), (1969a), Detroit electro-magnetic survey, Data package, Appendix through 7, Prepared by White Electromagnetics, Inc., for the Radio Committee, AMA (Oct.).
- Automobile Manufacturers Assoc. (AMA), (1969b), Ambient electro-magnetic survey in Detroit, Mich., Engineering Rept. prepared by White Electromagnetics, Inc., for the Radio Committee, AMA (Oct.).
- Automobile Manufacturers Assoc. (AMA), (1970), Microwave (1-2.5 GHz) radiation from motor vehicles, Rept. prepared by the Radio Committee, AMA (Sept.).
- Automobile Manufacturers Assoc. (AMA), (1971), Radio interference tests, Data package, South Lyon, Mass. (June 14-17).
- Bachmann, H., and W. Mosch (1967), Die messung der hochfrequenzstoerspannung bei hoechsten spannungen, *Elektrie Journal* 21, No. 7, 243-244 (July).
- Ball, A.H., and W. Nethercot (1961), Radio interference from ignition systems, *IEE* 108, Pt. B, No. 39, 273-278 (May); also: The British Elec. and Allied Industries Res. Assoc., Ref. M/T138 (May, 1960).
- Barnard, C.R.W. (1967), VHF noise levels over large towns, Roy. Aircraft Establish. Tech. Rept. 67213(AD 827, 640), (Aug.).

- Bartenstein, R., and Lesch (1956), Measurements of corona losses and interference levels at the 400 kv research station in Mannheim-Rhenau with special reference to bundle conductors, Internatl. Conf. on Large Electric Systems III, Rept. No. 402.
- Belwanz, W.W., and J.P. Weston (1962), The prediction of rocket exhaust interference with radio signals, NRL, Presented at Ions in Flames and Rocket Exhaust Conf., Oct. 10-12, Palm Springs, Calif.
- Beverage, H.H., E.A. La Port, and L.C. Simpson (1955), System parameter using tropospheric scatter propagation, RCA Rev., pp. 432-457 (Sept.).
- Bond, C.R., W.E. Pakala, R.E. Graham, and J.E. O'Neil (1963), Experimental comparisons of radio influence fields from short and long transmission lines, IEEE Trans. Power Apparatus and Systems 82, 175-185 (April).
- Borquist, W., and A. Vrenthem (1948), Swedish 380 kv system, Paper No. 12, Internatl. Conf. on Large High-Voltage Electric Systems, Paris, France, (June 24-July 3).
- Braillard, R. (1931), Les troubles causes occasionellement par les reseaux electriques a haute tension a la reception des emissions radiophoniques, Conf. Internationale des grand Reseau Electriques A Haute Tension, Compte Rendu des Traveaux de la Sixieme Session 2, pp. 609-611 (Juin 18-27).
- Braillard, R. (1933), Contribution a l'etude des perturbations radiophoniques par les installations a haute tension, Conf. Internationale des Grande Reseaux Electriques A Haute Tension, C.R. des Travaux de la Sept. session June 16-24, 1933 3, pp. 1-4; discussion D64-71.
- Bray, W.J., H.H. Lillicrap, and A.B. Ewen (1946), Measurements of radio noise field on 1650 kc/s, Office of Chief Engr., P.O. Engineering Dept., Radio Rept. 1487, General Post Office, London (June 1).

- Bruckert, E.J., and J.H. Sangster (1969), The effect of fading and impulse noise on digital transmissions over a land mobile radio channel, Tech. Digest, 20th Annual Conf., IEEE Vehicular Technol. Grp., Columbus, Ohio, Dec. 405 *IEEE, New York, N.Y.), pp. 14-17.
- Bruniaux, C., and R. Petit (1934), Perturbations approtees au service des communications radioelectriques par les lignes de distribution d'energie, Annales des Postes Telegraphes et Telephones 23, No. 3, 222-231 (Mar.).
- Buchner, M.M., Jr. (1969), Some experimental results on impulse noise classification, Proc. Natl. Electron. Conf., Dec. 9-11, Chicago, Ill., pp. 474-478.
- Buck, R.E., L.A. Frasco, H.D. Goldfein, S. Karp, L. Klein, E.T. Leonard, J. Liu, and P. Yoh (1971), Ground vehicle communication and control, Rept. No. DOT-TSC-UMTA-71-6, Annual Report, Vol. 1 (Aug.).
- Buehler, W.E., and C.D. Lunden (1965), High frequency metropolitan radio noise, Document No. D6-17679, Boeing Airplane Co., Transport Div., Renton, Washington (June 8).
- Buehler, W.E., and C.D. Lunden (1966), Signature of man-made high frequency noise, IEEE Trans. Electromag. Compatibility EMC-8, 142-143.
- Buehler, W.E., C.H. King, and C.D. Lunden (1968), VHF city noise, IEEE EMC Symp. Record, 10th, 113-118 (July 23-25).
- Bullington, Kenneth (1947), Radio propagation at frequencies above 30 Mc, Proc. IRE 35, 1122-1136 (Oct).
- Burgess, R.E. (1941), Noise in receiving aerial systems, Proc. Phys. Soc. 53, 293-304 (May).
- Burgess, R.E. (1946), Fluctuation noise in a receiving aerial, Proc. Phys. Soc. 58, 313-321.
- Cahen, Francois (1948), Results of tests carried out at the 500 kV experimental station of Chevilly (France), especially on corona behavior of bundle conductors, AIEE Trans. 67, Pt. II, 1118-25.

- Cahen, F., and R. Pelissier (1948), L'emploi de conductors en faisceaux pour l'armement des lignes a tres haute tension, Bull. Soc. France-Electr. T.8, p. 111.
- Cahen, F., and R. Pelissier (1952), Research on corona effect at extra high voltages-radio interference, Rept. No. 406, Internatl. Conf. on Large Electric Systems, Vol. III.
- Carroll, J.S., and J.T. Lusigman (1928), The space that surrounds a conductor in corona, AIEE Trans. 47, No. 1, p. 50 (Jan).
- Carson, John R. (1921), Radiation from transmission lines, J. AIEE, 40, 789-790 (Oct).
- Carson, J.R. (1931), The statistical energy-frequency spectrum of random disturbances, B.S.T.J. 10, 374-381.
- Cheek, R.C., and J.D. Moynihan (1951), A study of carrier-frequency noise on power lines, Pt. II: Results of Field Measurements, AIEE Trans. 70, p. 10.
- Chislow, J.H. (1960), RF impulse noise from high volume vehicular traffic flow-measured noise levels at 150, 450, and 800 Mc., Bell Telephone Labs., 31-38-3 (July 28).
- CISPR (Internatl. Spec. Cmte. on Radio Interference) (1957), Contribution of the German National Committee to study Question #7: Radiation from power lines, Internatl. Electro-Tech. Comm. (Dec.).
- Civil Aeronautics Admin. (1947), Measurements on noise radiation from high-voltage transmission lines, U.S. CAA Tech. Dev. Note No. 46, p. 29 (May).
- Clark, D.B. (1961), Evaluation of interference suppression of fluorescent lamps, U.S. Naval Civil Engrg. Lab. Tech Rept. 166, (Oct.).
- Clark, D.B., and J.L. Brooks (1961), Field evaluation of the NCEL interference attenuating power conductor, Proc. of 7th Conf. on Radio Interference Reduction and Electromagnetic Compatibility (Nov.).

- Conrad, F. (1937), Versuch Zur Rundfunkentstoerung Einer Hochspannungsleitung Auf Einem Begrenzten Abschnitt, Elektrotechnische Zeit. 58, No. 30, 813-17.
- Crary, S.B. (1932), Determination of the disruptive critical voltage of a multiple conductor transmission line, AIEE Trans. 51, 820-21.
- Crichlow, W.Q., and R.T. Disney (1961), Man-made radio noise measurements at the NBS Gaithersburg site and NBS, Washington, Natl. Bur. Standards Memo. Rept. PM-83-45.
- Crichlow, W.Q., C.J. Roubique, and R.T. Disney (1960), Preliminary recording of the radio energy spectrum below 575 kc/s, Natl. Bur. Standards Memo. Rept. PM 83-35 (July 21).
- Crippen, L. J. (1970), Investigation of radio frequency interference at Edzell, Scotland, Final Rept., Project No. 70-157, Dept. of the Navy, NESTEF, St. Inigoes, Maryland (Mar).
- Crippen, L. J., O.D. Stewart, and J.W. Engles (1970), Program for controlling the effects of radio noise and improving telecommunication system effectiveness; Bibliography: Statistical Parameters of Radio Noise, Naval Security Engrg. Facility, Washington, D.C.
- Crooks, J.S., H.A. Baldwin, and L.E. Bates (1941), Improved hardware cuts radio interference, Elec. World 116, No. 2, pp. 42-44 and 117 (July 12).
- Crosby, M.G. (1937), Frequency modulation noise characteristics, Proc. IRE 25, 472-514.
- Dalmijn, W.J.L. (1968), Radio interference from motor vehicle ignition systems, Ingenieur (Netherlands) 80, No. 46, p. (et) 171-(et)4 (15 Nov.)(in Dutch).
- Daniel, L.H. (1939), The radiated short wave disturbance from automobile ignition systems, British Elec. Res. Assoc. Rept. No. M/T 63, 15 pp. (London).

- Daniel, L.H. (1945), The radiation from automobile ignition system at ultra high frequencies, British Elec. Res. Assoc. Rept. No. M/T 82, 7 pp. (London).
- Davies, K. (1965), Ionospheric radio propagation, Natl. Bur. Standards pp. 310-314 Mono. 80, (April).
- Dean, Charles E. (1960), Measurements of the subjective effects of interference in television reception, Proc. IRE 48, No. 6, Pt. 1, 1035-1049 (June).
- Deitz, Jules (as Chairman, Working Group 3) (1966), Man-made noise - report to the Tech. Committee of the Advisory Committee for Land Mobile Radio Services, FCC, from Working Group 3 (June).
- Dickson, F.H. (1962), Man-made Noise, F. Horner, ed. (Elsevier Publ. Co., Amsterdam, New York).
- Dinger, H.E., and J.E. Raudenbush (1952), Anti-friction bearings as a radio noise source, Naval Res. Lab. Rept. No. 4023 (July), 10 pp. and figures.
- Disney, R.T. (1971), Radio noise levels at Pow Main, Alaska, Telecomm. Tech. Memo. OT-TM-47, OT/ITS, U.S. Dept. of Commerce, Boulder, Colorado (June).
- Disney, Robert T. (1972), Correlation of man-made radio noise received on two antennas, Telecomm. Tech. Memo. OT/TM-74, OT/ITS, U.S. Dept. of Commerce, Boulder, Colorado (Jan.).
- Disney, R.T., and W.Q. Crichlow (1966), Interference Survey, NAVCOM receiving sites, ESSA Tech. Memo. IER TM-ITSA-19, U.S. Dept. of Commerce, Boulder, Colorado.
- Disney, R.T., and W.Q. Crichlow (1961), Radio noise sources and characteristics I, Lecture #29 (with appendix by K.A. Norton), Natl. Bur. Standards course in Radio Propagation-Ionospheric Propagation (summer).
- Disney, R.T., and R.J. Matheson (1970), Bremerhaven telecommunications protection criteria and area zoning restrictions, ESSA Tech. Memo. ERLTM-ITS 224 (April), U.S. Dept. of Commerce, Boulder, Colorado.

- Disney, R.T., and W.L. Robinson (1960), Man-made radio noise measurements in the vicinity of Cocoa, Florida, Natl. Bur. Standards Memo. Rept. PM 83-44 (Nov.).
- Disney, R.T., and A.D. Spaulding (1968), Interference measurements and analysis, Final Rept. to Space and Missile Systems Organization, VI, prepared by the ESSA Res. Laboratories under Contract No. F04701-69-F-0072, Proj. 672A, U.S. Dept. of Commerce, Boulder, Colorado.
- Disney, R.T., and A.D. Spaulding (1970), Amplitude and time statistics of atmospheric and man-made radio noise, ESSA Tech. Rept. ERL 150-ITS 98, Dept. of Commerce, Boulder, Colo. 80303.
- Dolan, James L. (1963), Some vehicle ignition measurements, Div. Internal Rept. No. 15, Natl. Radio Astronomy Observatory, Green Bank, W. Virginia.
- Dolan, James L. (1970), EMC in radio astronomy, IEEE Internatl. EMC Symp. Record, 70C28, pp. 365-375.
- Donnell, P.S. (1926), Radio interference from power circuits, J. Electricity 56, 217-220.
- Doty, A.C., Jr. (1971), A progress report on the Detroit electromagnetic survey, Auto. Eng. Congress, paper #710031, Soc. Automotive Engrs., Detroit, Mich. (Jan.).
- Duncan, S.W. (1931), Trolley buses and radio reception, Electrician 107, p. 527.
- Eaglesfield, C.C. (1946), Motor car ignition interference, Wireless Engr. 23, No. 277, 265-272.
- Eaglesfield, C.C. (1951), Car ignition radiation, Wireless Engr. 28, 17-22 (Jan.).
- Eggberg, (1958), Vehicular Consm. (?) in the city of Chicago government, Dept. of Motors and Sewers, Chicago, Ill. (Dec. 12).

- Egidi, C., and E. Nano (1961), Measurement and suppression of VHF radio interference caused by motorcycles and motor cars, IRE Trans. Radio-Frequency Interference, pp. 30-39 (May).
- Eklund, A.M. (1965), Noise source for millimeter wavelength, Varian Associates, AD 453097, Palo Alto, Calif., 12 pp (April).
- Elec. News & Engrg. (1929), Radio inductive interference from overhead distribution systems, Electrical News and Engrg. 38, pp. 36-37 (May).
- Ellis, A.G. (1963), Site noise and its correlation with vehicular traffic density, Proc. IRE, Australia 24, 45-52 (Jan.).
- Englesfield, C.C. (1946), Motor-car ignition interference, Wireless Engrg. 23, No. 277, p. 265 (Oct.).
- English, W.N. (1948), Corona from a water drop, Phys. Rev. 74, No. 2, 179-189 (July).
- Eppen, F., and H. Seiberth (1938), Rundfunkstoerungsmessungen an Strassenbahnen, Elektrotechnische Zeit. 59, No. 24 (June).
- Eppen, F., and Sontag (1934), Der Rundfunk-Entstoerungsversuch in Baden-Baden, Elektrotechnische Zeit. 55, No. 21, 509-512 (see also transl. abstract in Elec. Rev. 115, No. 2956, p. 80, July 20, 1934).
- ESSA Laboratories (1968a), Interim evaluation report, Field test results Area A, Warren AFB, Wyoming, ESSA, Dept. of Commerce, Boulder, Colorado (Sept. 10).
- ESSA Laboratories (1968b), Interim evaluation report interference field tests, Communica. field test project 672A, ESSA, Dept. of Commerce, Boulder, Colorado (Dec. 24).
- Fabre, M.J. (1952), Etude experimentale et theorique du mecanisme de propagation et de rayonnement des perturbations emises par les lignes a Hautztansion, Seance du 18 Dec 1952 de la 4, Bull. Soc. Francaise des Electriciens.

- Fabre, M.J. (1953), Experimental and theoretical study of the mechanism of propagation and radiation of radio noise emitted by high voltage lines, Bull. Soc. Francaise des Electriciens, pp. 419-424 (July).
- Fain, W.W., C.M. Crain, and W.C. Duesterhoeft (1958), Electro-magnetic noise and propagation observations in vicinity of nuclear reactor, IRE Trans. Ant. Prop. AP-6, No. 3, 286-288.
- Farrar, C.L. (1930), Interference from power lines, Radio Eng. 10, pp. 40-41, 44.
- FCC (1946), 1000 kc measurements made in and around Boston, Philadelphia, Chicago, Cincinnati, Des Moines, Nashville and Lincoln, Fed. Communica. Comm. Clear Channel Committee I.
- Feltus, J. C. (1965), Electromagnetic environmental survey:
Rept. 1: Yokota Air Base, Japan, PGR-EMC-65-28 (Feb);
Rept. 2: Tokorozawa, Japan, PGR-EMC-65-29 (May).
- Feltus, J. C. (1966), Electromagnetic environmental survey, Tachikawa Air Base, Japan, PGR-EMC-66-13 (April).
- Findlay, J.W. (1958), Noise levels at the National Radio Astronomy Observatory, Proc. IEE 46, No. 35-38 (Jan).
- Findlay, J.W. (1962), Protecting the science of radio astronomy, Sci. 137, No. 3533, 829-835.
- Fischer, Wm. H. (1965), The radio noise spectrum from ELF to EHF, J. Atmos. Terr. Phys. 27, 475-480.
- Florida, Univ. of (1948), Low frequency noise and propagation studies, Elec. Engrg. Sec., Engrg. and Indus. Experiment Station, Univ. of Florida, Gainesville, Florida (Watson Lab. AMC Contract W-28-099-ac-152 Prog. Rpts.), (Oct).
- Forrest, J.S. (1952), Power loss and radio noise measurements on a 275-kv experimental transmission line, Internatl. Conf. on Large Electric Systems III, Rept. No. 301.
- Franz, K. (1942), The amplitude of noise voltages, Elec. Nachr. Tech. 19, p. 166.

- Frederick Res. Corp. (1963), Factors for predicting radio frequency interference from vehicular ignition systems, Natl. Radio Astronomy Obs. Contract No. RAP-42 conducted by Frederick Res. Corp., Gaithersburg, Md.
- Furkert, W. (1935), Radio interference from HV lines, Elec. Rev. 116, p. 689 (May).
- Fyfe, D.F., and G.E. Lyons (1970), Case studies of interference and noise sources in the HF band, Proc. Inst. Radio Electron. Eng. Aust. 31, No. 8, 261-269.
- Garlan, H., and E. Davis (1957), Man-made noise, Fed. Communica. Comm. (Dec.).
- Garlan, H., and G.L. Whipple (1964), Field measurements of electromagnetic energy radiated by RF stabilized arc welders, FCC Tech. Div. Rept. T-6401, (Feb.).
- Garnes, Wm. B., and Wm. T. Bisignani (1969), Survey of man-made electrical noise affecting radio broadcasting, PB 188651 Tech. Support Package for Tech. Brief 69-10308, Tech. Util. Div., Office of Technol. Util., Natl. Aero. and Space Admin.
- Garrett, R.T. (1970), Radio interference in naval electronic systems, Proc. Inst. Radio Electron. Eng. Aust. 31, No. 8, 256-261 (Aug.).
- Gauper, H.A. (1962), Final report - radio influence noise tests, Niagara, Adirondack 345 kv tie-line, Gen. Engrg. Lab., General Electric Co., Schenectady, N.Y. (Feb.).
- Gehrig, E.H., A.C. Peterson, C.F. Clark, and T.C. Tednous (1967), Bonneville Power Administration's 1100 kv direct current test project: II. Radio interference and corona loss, IEEE Trans. on EMC, PAS 86, p. 278 (Feb.).
- General Post Office (1929), The investigation of interference with broadcasting reception by electric tramways and trolley bus systems, GPO Rept (Radio) No. 135, 4p; (also, Summary, Elec. Rev. 105, 924-925).

- Genistron, Inc. (1961), Engineering services, electromagnetic energy survey, Naval Electron. Lab., San Diego, Calif., Final Rept., Mar. 31., Genistron, Inc., Los Angeles, Calif.; also, U.S. Navy Bur. Yards and Docks, Southwest Div., San Diego, Calif., Rept. NBY 28088.
- Genistron, Inc. (1964), Field radiated radio frequency survey, NASA Manned Spacecraft Center, Clear Lake, Tex., NASA 92078, Los Angeles, Calif. (June).
- George, R.W. (1940), Field strength of motor car ignition between 40 and 450 megacycles, Proc. IRE 28, 409-412 (Sept.).
- German, J.P. (1969), Characteristics of electromagnetic radiation from gap-type spark discharges on electric power distribution lines, IEEE Trans. Electromag. Compatibility, EMC-11, 83-89 (May).
- German, J.P. (1971), A survey and forecast of the electromagnetic spectrum technology, Pt. II, Texas A&M Res. Foundation, College Station, Texas.
- Ghesquire, J.D., and S.O. Bennett (1958), Measurement of electromagnetic interference on high voltage (50 kv) transmission lines, Proc. of 4th Conf. on Radio Interference and Electromagnetic Compatibility, Armour Res. Foundation, October, 1958.
- Gill, A.J., and S. Whitehead (1938), Electrical interference with radio reception, J. IEE, 83, pp. 3450886.
- Glinka, V.N., and G.M. Myaskovskiy (1967), Some time and spectral characteristics of the overall radio interference in a large city, Telecomm. and Radio Engr., U.S.S.R., pp. 40-44 (Feb.).
- Gottschalk, W.M., and D. Middleton (1954), Microwave noise study, ASTIA-OSC.
- Graham, R.E., and C.R. Bond (1962), Radio-influence testing on 70 miles of 345 kv horizontal bundle conductor, Pt. III, AIEE Trans. on PAS 80, 1022-1026 (Feb.).

- Greenstein, L.J., and H.G. Tobin (1963), Analysis of cable coupled interference, IEEE Trans. RFI-5, No. 1, 43-55.
- deGroen, P. (1953), Storingen in de ontvangst van omroepprogramma's, Electro-Techniek 31, No. 8, 129-131.
- Gross, I.W., and C.F. Wagner (1952), Corona and radio influence tests on the American Gas and Elec. Company 500 kv test project, Rept. No. 403, Internatl. Conf. on Large Electric Systems III.
- Gurnett, D.A. (1966), A satellite study of VLF hiss, Univ. of Iowa, Iowa City, Ia.
- Hadfield, A.S. (1956), Field experience with corrosion of distribution material, Conf. of AIEE Winter General Meeting, New York City, N.Y., Paper No. CP 56-270, 5 pp.
- Hagn, G.H., and R.A. Shephard (1974), Man-made electromagnetic noise from unintentional radiators: A summary, NATO (AGARD) Conference Proceedings #159 on The Electro-magnetic Noise, Interference, and Compatability, 21-25 Oct. 1974, Paris France (NTIS)
- Hamer, E.G. (1953), Noise performance of VHF receivers, Electron. Engrg. 25, 68-70 (Feb).
- Harris, F.B., Jr. (1960), Aerodynamic characteristic of trailing-wire antenna at supersonic speeds, Contr. AF 19(604)-3458, SRI Tech. Rept. 68, Stanford Res. Inst., Menlo Park, Calif. (Mar.).
- Harvey, J.L.W. (1970), Radio frequency interference from electric power systems, Proc. Inst. Radio Electron. Eng. Aust. 31, No. 8, 269-275 (Aug.).
- Helstrom, C.W. (1961), The spectrum of corona noise near a power transmission line, AIEE Trans. PAS 80, Pt. III, 831-717 (Dec.).
- Hera, C.O. (1930), Interference of tramways with broadcast reception, Engrg. 129, p. 250.
- Herman, J.R. (1964), Radio noise in Anarctic regions, Arctic Communications (B. Landmark, ed.), Agardograph 78, p. 127.

- Herman, J.R. (1970), Survey of man-made radio noise, URSI Prog. in Radio Sci. 1, 315-348; also, USSGIA/7 Information Document (CCIR).
- Hern, C.O. (1930), Interference of tramways with broadcast reception, Engrg. 129, p.. 250.
- Hillebrand, W.A., and C.J. Miller, Jr. (1934), Insulator surface and radio effects, Elec. Engrg. 53, No. 8, 1213-1220 (Aug).
- Hoff, Robert S. (1949), Low frequency noise and propagation studies, Industrial and Engrg. Res. Station, Univ. of Florida, Gainesville, Fla. (July).
- Hoffman, L.A., K.H. Hurlbut, and C.J. Zamites, Jr. (1966), Radio-frequency interference at orbital altitudes, IEEE Trans. on Electromag. Compatibility, EMC-8, No. 1, 1-7.
- Horner, F. (1965), Progress in Radio Science IV F. Horner, ed. (Elsevier Press, New York, N.Y.).
- Hoshiai, M., T. Yamada, and S. Yoshino (1956), Radio interference research in Japan with special reference to EHV transmission lines, The Internatl. Conf. on Large Electric Systems III.
- Howe, L.M. (1937), Radio Interference from street railway systems, Proc. IRE 25, No. 6, 708-713.
- Hsu, H.P. (1964), Automotive ignition interference, IEEE Trans. on EMC, EMC-6, No. 3, 15-20.
- Hsu, H.P., R.M. Storwick, O.C. Schlick, and G.L. Maxam (1973), Measured amplitude distributions of automotive ignition noise, Internatl. IEEE EMC Symp. Record, IEEE 73 CIO 751-8 EMC, pp. 269-278.
- Huang, C.M. (1969), Characteristics of man-made noise in Taiwan, Natl. Taiwan University, Dept. of Elec. Engrg. (July).
- Hulscher, F.R. (1970), Problems of electrical interference in small switching systems, Proc. Inst. Radio Electron. Eng. Aust. 31, No. 8, 276-278.

- Hunger, J., and B. Zube (1970), Influence on radio and television main - sets by phenomena in a 50 Hz public network, *Nachrich. Zeit.* 23, No. 8, 399-401 (Aug.).
- Hurlbut, K.H., W.W. Ward, and C.J. Zamites, Jr. (1968), The LES-5 RFI Experiment, Lincoln Lab., Mass. Inst. of Tech. LLTN 1968-6.
- Hurlbut, K.H., and C.J. Zamites, Jr. (1970), UAF radio frequency interference measurements at synchronous altitude, AF Rept. No. Samso-TR-70-116 (Jan. 9).
- Huguemin, G.R., A.E. Lilley, W.H. McDonough, and M.D. Papagiannis (1964), Measurement of radio noise at 700 kHz and 2.2 GHz from a high altitude rocket probe, Tech. Rept. No. 1, Contracts AF 19628 3890, AF 19604 6120, AFCRL 64 596, 29 pp., Harvard College, Cambridge, Mass. (July).
- Iaselli, P. (1967), Choice of working radio frequencies in artificial satellite communication systems, *Elettrotecnica (Italy)* 42, No. 2, p. B.1.6 (In Italian).
- Ibukun, Olu (1964), Low altitude nuclear test and radio noise level, *J. Atmos. Terr. Phys.* 26, 795-803.
- IEEE (1965), Transmission system radio influence, IEEE Committee Report, *IEEE Trans. on RFI*, 714-722 (Aug.).
- IEEE (1970), IEEE Electromagnetic Compatibility Symposium Records, 1st through 12th (IEEE, New York, N.Y.).
- ITT (Internatl. Telephone & Telegraph) (1968), Reference Data for Radio Engineers, 5th edition, ch. 27 (Howard W. Sams and Co., Inc., Indianapolis, Ind.).
- IRPL (Interservice Radio Propaga. Labs.) (1943), Part 1, Interservice Radio Propaga. Handbook (Nov. 15).
- Ishibashi, T., and A. Shiratori (1956), Quantitative measurement method of various TV noises and the limitation of video interference, *NHK Tech. J.* 29, p. 1, Japan Broadcasting Corp., Japan.

- Ishida, T. (1966), Measurement of the height dependence of the intensity of city noise, Radio Res. Labs., Tokyo, Japan.
- Jacobs, E. (1970), Broadband noise: Its physical nature and measurement, IEEE Internatl. EMC Symp. Record, 70C28-EMC, 15-19.
- Jansky, Karl G. (1937), Minimum noise levels obtained on short wave radio receiving systems, Proc. IRE 25, pp. 1517-1530 (Dec.).
- Jansky, K.G. (1939), Experimental investigation of characteristics of certain types of noise, Proc. IRE 27, No. 12, 763-768.
- Jansky and Bailey, Inc. (1955), Report on work performed at a proposed radio astronomy site in Virginia, under Contract No. N-1735-21787 (Oct.).
- Jansky and Bailey, Inc. (1962), Interference prediction study, Prepared for Rome Air Dev. Ctr., Griffis AFB, New York, RADC-TR-61-312, ASTIN Docu. No. AD233366 (Jan.).
- Jansky and Bailey, Inc. (1963), Interference analysis study, Final Rept., Atlantic Res. Corp., Contract No. AF 30-6022665, RADC TDR 63-379 (June).
- Janssen, M. (1950), On radiation from overhead transmission lines, Proc. IEE 97, Pt. 3, Radio & Comm. Engr 47, 166-178 (May).
- Johnson, H. (1947), Super-high-frequency noise source, RCA Lab. Div. Quart. 1.
- JTAC (Joint Tech. Adv. Committee) (1964), Radio spectrum utilization, JTAC, IEE/EIA Rept., pp. 56-82.
- JTAC (Joint. Tech. Adv. Committee) (1968), Spectrum engineering, the key to progress, IEEE/JTAC Rept. of Committee 63.1 (Mar.).
- Jolkovski, J. (1963), Radio frequency interference report 1963-1970, Signal 17, No. 5, 42-43.
- Jones, F. Llewellyn (1953), Electrical discharges, Repts. on Progress Phys. 16, 216-65.

- King, C.H. (1964), Noise temperature of an airborne VHF communications antenna, Document No. D6-9461, Boeing Air Plane Company, Transport Div., Renton, Washington (Mar. 27).
- King, C.H. (1966), Noise temperature of experimental air-satellite VHF communication antenna, Document D6-15252, Boeing Company, Airplane Div., Renton, Washington (May 10).
- Kital, R. (1952), Impulse electromagnetic fields, S. African IEE Trans. 43, Pt. 7, 200-211 (July).
- Kuffel, E., I. Arterin, and R.N. Allen (1965), Radio interference from high-voltage insulators and factors which affect the interference level, Proc. IEE 112, No. 5, 925-929.
- Krug, F. (1926), Radio interference caused by poorly grounded cable sheath, Elec. World 87, p. 718.
- Kruse, S. (1925), Transmission lines and interference with radio, Elec. World 85, p. 1080 (May 23).
- Lacroix, Real, and Hulbert Charbonneau (1968), Radio interference from the first 735-kv line of Hydro-Quebec, IEEE Trans. on Power Apparatus and Systems PAS-87, No. 4, 932-939.
- Landon, V.D. (1936), A study of the characteristics of noise, Proc. IRE 24, p. 1514.
- Landon, V.D. (1942), The distribution of amplitude with time in fluctuation noise, Proc. IRE 30, 425-429 (Sept.).
- Langton, J.L., and E. Bradshaw (1934), Radio interference from discharges on high-voltage line insulators, J. IEE 75, No. 455, 643-652 (Nov.).
- Large, M.I. (1957), The radio interference produced by corona discharge, J. Atmosph. Terrest. Phys 10, 240-250.
- Large, M.I., and T.W. Wormell (1958), Fluctuations in the vertical electric field in the frequency range 1 cycle per second to 500 cycles per second, Rec. Adv., 603-607.

- Lee, J.M. (1947), Measurements of noise radiation from high-voltage transmission lines, Tech. Dev. Note No. 46, Civil Aeronautics Admin., Dept. of Commerce, Washington, D.C.
- Leslie, J.R., and P.W. Waddington (1956), Field studies of noise at television frequencies from power circuits, AIEE Trans. 75, Pt. III, 656-661 (Aug.).
- Lippert, G.D., W.E. Pakala, S.C. Bartlett, and C.D. Fahrnkopf (1951), Radio influence tests in field and laboratory 500 kv test project at the American Gas and Electric Company, AIEE Trans. 70, Pt. I, 251-255 (Discussion 265).
- Lippert, G.D., W.E. Pakala, S.C. Bartlett, and B.J. Sparlin (1957), The radio influence characteristics of bundle and single conductors, AIEE Trans. 76, Pt. III, Paper No. 57-804, pp. 1302-1310.
- Lokken, J.E., and J.A. Shand (1964), Man-made electromagnetic interference at extremely low frequencies, Can. J. Phys. 42, No. 10, 1902-1907.
- Los Angeles STAC (Scientific Tech. Adv. Committee) (1965), Los Angeles STAC meeting: (a) agenda and area growth; (b) Yellow Cab mobile report; (c) Automobile Club report (Aug. 19-20).
- Lunden, C.D. (1963), Radio noise from a large city, Boeing Airplane Company Rept. EU-RD-85, Apr. 5 (Supersedes RE-187 of Dec. 1961), Seattle, Washington.
- Lunden, C.D. (1965), Puget Sound ambient radio noise levels, The Boeing Company, Seattle, Wash.
- Lynn, J.F. (1972), Man-made electromagnetic noise in southern California and southern Nevada, IEEE Trans. Electromag. Comp. EMC-14, 92-96.
- Martin, H., and F. Tabor (1972), Radio frequency emission characteristics and measurement procedures of incidental radiation devices and industrial, scientific, and medical equipment, ITT Res. Inst. ECAC, prepared for Dept. of Transportation, Rept. No. FAA-RO-72-80,1.

- McElroy, A.J., H.M. Smith (1963), Propagation of switching-surge wavefronts on EHV transmission line, IEEE Trans Power Apparatus and Systems, PAS-81, Pt. III, Paper 62-1101, pp. 983-998 (Feb.).
- McMillan, F.O. (1933), Asphalt emulsion reduces insulator radio traveling, Elec. World 102, No. 6, 185-187 (Aug. 5).
- McMillan, F.O. (1932), Radio interference from insulator corona, AIEE Trans. 51, pp. 385-391 (June); also: (1932) Elec. Engrg 51, pp. 3-9 (Jan), same title.
- McMillan, F.O. (1935), Some characteristics of AC conductor corona, AIEE Trans. 54, 282-292 (Mar.).
- Manneback, C. (1923), Radiation from transmission lines, J.A.I.E.E. 42, 95-105.
- Marshall, C.W. (1950), Telephonic and radio interference from high-voltage systems, Engrg. 170, No. 4410, p. 103.
- Mertel, H.K. (1968), Measurement of manmade electromagnetic radiations from a 200-mile orbit, IEEE Electromagnetic Compatibility Symposium Record, pp. 119-129.
- Mills, A.H. (1968), A survey of radio frequency noise in urban, suburban, and rural areas, IEEE EMC Symposium Record Seattle, Wash., 68C12-EMC, pp. 108-112.
- Mills, A.H. (1969), Analysis of data from RF noise survey of Phoenix, GDC-ERR-AN-1365 Rept. Convair Div., General Dynamics, San Diego, Calif. (Feb. 3).
- Mills, A.H. (1969), Measurement and analysis of radio frequency noise in urban, suburban, and rural areas, NASA CR-72490/GDC-AWV68-001 Rept., prepared for NASA under Contract NAS 3-9714, Convair Div., General Dynamics, San Diego, Calif. (Feb. 1).
- Mills, A.H. (1971), Measurement of radio frequency noise in urban, suburban, and rural areas, Contract NAS 3-11531, Convair Div., General Dynamics, San Diego, Calif. (Dec.).

- Mirskiy, G. Ya. (1967), Radioelectronic measurements, Transl. document (orig. in Russian), Dept. of Comm. Clearing House FTD-HT-66-266; (renamed NTIS, National Technical Information Service), Springfield, Virginia, 22151 (Apr. 20).
- Mandel, R.H. (1970), Electromagnetic interference caused by industrial users of radio frequency generators, Proc. Inst. Radio Electron. Eng. Aust. 31, No. 8, 246-251.
- Mori, H., T. Yamada, and S. Hoki (1954), Corona research on the Tanashi testing transmission line in Japan, Rept. No. 402, Internatl. Conf. on Large Elec. Systems III.
- Morris, A. (1934), Interference of electrical plant with reception of radio broadcasting, J. IEEE 74, No. 447, 245-252, discussion 252-263.
- Moynihan, J.D., and B.J. Sparlin (1953), A Study of Carrier-Frequency Noise on Power Lines, Pt. III: Interpretation of field measurements, AIEE Trans. 72, No. 6, 573-581, Paper No. 53-165 (June).
- Moynihan, J.D., and B.J. Sparlin (1955), A Study of Carrier-Frequency Noise on Power Lines, Pt. IV: Conclusion of field measurements, AIEE Trans. 74, 795-800, Paper No. 55-458 (Aug.).
- Mumford, A.L., and P.L. Barker (1934), Measurements of the interference from the Portishead Bridgewater 132 kv overhead powerline, Great Britain P.O., Engrg. Dept. Radio Rept. No. 255.
- Murahata, S., and R.E. Skerjanec (1967), Path intermodulation distortion measurements of noise-power-ratio over tropospheric beyond-the-horizon paths employing an FDM-FM system, ESSA/ITSA Tech. Rept. TR-41 (July), Dept. of Commerce, Boulder, Colorado 80302.
- Myers, H.A. (1963), Industrial equipment spectrum signatures, IEEE Trans. on Radio-Frequency Interference, 5, No. 1, pp. 30-42, (Mar.).

- Nakamura, C., M. Inoue, H. Suzuki, and K. Endo (1959), On the city noise in the VHF frequency band, NHK Tech. J. 43, Japan Broadcasting Corp., Japan.
- Nakamura, C., M. Inoue, H. Suzuki, and K. Endo (1960), Radio frequency welder with a suppressor for noise interference, NHK Tech. J. 77, Japan Broadcasting Corp., Japan (Nov.).
- Nakaniski, K. (1931), Hi-frequency electrical oscillation resulting from surface corona discharge, Electro-Tech. Lab. Res. No. 327, p. 69.
- Nanevich, J. E., E. F. Vance, and S. Serebreny (1965), Low-altitude long-range all-weather vehicle interference investigation, Pt. I, SRI Tech. Rept. No. TR65-239, WADC Contract AF 33(615), Stanford Res. Inst., Stanford, Calif. (Dec.).
- Nano, E. (1967), La Misura dei radiodisturbi prodotti apparecchi elettrici a motore, J. Alta Frequenza 36, No. 10, 905-909 (Oct.).
- NEMA (Natl. Elec. Mfgs. Assoc.) (1935), Methods of measuring radio noise, NEMA Publica. No. 102, Natl. Elec. Mfgs. Assoc., New York, N.Y.
- NEMA (Natl. Elec. Mfgs. Assoc.) (1940), Methods of measuring radio noise, NEMA Publica. No. 107 (Natl. Elec. Mfgs. Assoc. New York, N.Y.).
- NEMA (Natl. Elec. Mfgs. Assoc.) (1964), Methods of measurement of radio influence voltage (RLV) of high-voltage apparatus, NEMA Standards Publica. No. 107.
- Navy, U.S., Bur. of Yards and Docks (1961), Conducted electromagnetic interference measurement survey 500-130,000 volts, Contract NBY-17825, U.S. Navy Bur. of Yards and Docks, Washington, D.C. (Dec.).
- Nelson, W.R. (1966), Electrical interference, QST (April-May).
- Nelson, R.E., and J.E. Diehl (1963), Radio interference for carbon-brush operation, Electro. Technol. 72, No. 1, 53.57 (July).

- Nethercot, W. (1936), Short wave radio interference produced by electrotherapy apparatus, ERA Rept. M/T50.
- Nethercot, W. (1937), The relation between the sparking plug current and the short wave radiation produced by ignition systems, ERA Rept. M/T53.
- Nethercot, W. (1937), The radio frequency disturbance from mercury arc rectifier and its suppression, ERA Rept. M/T48.
- Nethercot, W. (1945), Radio interference from automobiles in the range 30-220 MHz, ERA Rept. M/T81.
- Nethercot, W. (1949), Car ignition interference, Wireless Eng. 26, 251-255 (Aug.).
- Nethercot, W. (1957), Ignition interference, Wireless World 53.
- Newell, H.H., and F.W. Warburton (1956), Variations in radio and television interference from transmission lines, AIEE Trans. Paper No. 56-223, p. 15; also: AIEE Trans. 75, Pt. III, 420-426.
- Newman, M.M., R.C. Schwantes, and J.R. Stahmann (1953), Aircraft radio interference measurements, Elec. Engrg., Sec. 1 (Jan.).
- Niamorsia, J.E. (1959), Investigation of corona noise in a three-phase transmission line, Proc. of the Fifth Conf. on Radio Interference Radiation and Electronics Compatibility by Armour Res. Fdn., Illinois Inst. of Technol., Chicago, Ill. (Oct.).
- Nichols, B. (1959), Radio noise and atmospheric refraction of VHF and UHF, RADC Tech. Rept. No. TR-59-134A, Final Rept. Pt. 1, Prepared under Contract No. AF30(635)2886, Cornell University, Cornell, N.Y. (Apr. 20).
- Nigol, O. (1964), Analysis of radio noise from high voltage lines, IEEE Trans. on Power Apparatus Systems 83, No. 5, 524-541.
- Nihon, Dorokodan (1966), On the interim results concerning the investigation made on the high frequency band noise intensity, Japan Highway Public Corp. (Aug).

- Okubo, K. (1968), Corona noise and corona power losses of extra high voltage transmission lines, Res. Electrotech. Lab. (Japan), 691, 103 pp. (in Japanese), (Nov).
- Ottesen, H., (1968), Electromagnetic compatibility of random man-made noise sources, Ph.D. dissertation, Univ. of Colorado, Boulder, Colorado (Aug.).
- Pacini, G.P., R. Gaudio, and F. Rossi Doria (1971), Experimental investigation on man-made noise in 850 MHz and 12 GHz frequency bands, Alta Frequenza XL, No. 2, 132-139 (Feb.).
- Padmanabhan, K., and A. Srinivasan (1962), Commutation and radio interference, Inst. Engrs. (India) J. 42, No. 10, Pt. EL5, 263-278 (June).
- Pakala, W.E., and V.L. Chartier (1971), Radio noise measurements on over-head power lines from 2.4 to 800 kv, IEEE Trans. on Power Apparatus Systems PAS-90, No. 3, 1155-1165 (May-June).
- Pakala, W.E., E.R. Taylor, Jr., and R.T. Harrold (1967), High voltage power line siting criteria, I and II, Tech. Rept. No. RADC-TR-66-606, Rome ADC, Griffiss AFB, New York (Mar.).
- Pakala, W.E., E.R. Taylor, Jr., and R.T. Harrold (1968), Radio noise measurements on high voltage lines from 2.4 to 345 kv, IEEE Electromagnetic Compatibility Symposium Record 68C12-EMC, 96-107, Seattle, Washington (July 23-25).
- Paolini, E. (1968), Attenuation measurements of MF, HF, and VHF waves over the ground surface, IEEE Trans. Electromagnetic Compatibility EMC-10, 307-312 (Sept.).
- Pauliny-Toth, I.I.K., and J.R. Shakeshaft (1962), A note on radio interference at a frequency of 408 Mc/s, Electron. Engrs. (GB) 34, p. 488 (July).
- Pearce, S.F., and J.H. Bull (1964), Interference from industrial, scientific, and medical radio frequency equipment, Rept. 5033, Elec. Res. Assoc., Surrey, England (Oct.).

- Pelissier, R. (1953), Radio interference caused by extra high voltage lines, Bull. Soc. Franc. Electr. 3, No. 31, pp. 409-418 (July).
- Pelissier, R., and D. Rinoudin (1949), Mecanisme de l'effect couronne sur les lignes de transport d'energie en courant alternatif, Bull. Soc. Franc. Electr. 9, p. 53-71.
- Pettersson, G.A., L. Ahlgren, and H. Forsell (1958), Telephone interference and other effects caused by the Gotland HV-DC transmission, Conf. Internatl. Grands Res. Elec. (CIGRE), Paper 324.
- Ploussios, G. (1966), Electromagnetic noise environment in the 200 MHz band on board aircraft, Proc. IEEE 54, No. 12, 2017-2019 (Dec.).
- Ploussios, G. (1968), City noise and its effects upon airborne antenna noise temperatures at UHV, IEEE Trans. Aerospace and Elec. Systems AES-4, No. 1, 41-51 (Jan.).
- Plush, R. (1965), Noise and interference, Paper No. 3.2.1.4, Addendum for defense communications systems (DCS), Engrg.-Install. Stds. Manual.
- Poak, C. (1958), Engine noise interference, Adv. Engrg. Elect., Syracuse, N.Y.
- Pohle, F.V. (1963), Structure-borne noise and related fields of interest: recent work and problem areas, AD 429-781, Adelphi Res. Center, Inc., Mineola, N.Y.
- Poritsky, H. (1932), Discussion on double conductors of transmission lines (Dwight and Farmer) and three-place multiconductor circuits (Clarke), AIEE Trans. 51, 821-822.
- Ports, D.C., and J.J. Crenca (1960), Interference prediction. Jansky and Bailey RADC Tech. Rept. No. TR 59-224, Final Rept. 1, RADC Contract AF 30(602)1934 (Jan.).
- Pressey, B.G., and G.E. Ashwell (1949), Radiation from car ignition systems, Wireless Eng. 26, No. 304, 31-36.

- Price, W.S. (1956), Measurement of Radio Disturbances Due to Corona Effect on Extra High Voltage Lines, Pt. II: Measurements on extra high voltage lines of different construction, Paper No. 416, Internatl. Conf. on Large High Voltage Electric Systems, Pt. III.
- Price, W.S., S.C. Bartlett, and E.S. Zobel (1956), Lightning and corona performance of 330 kV lines on the American Gas and Electric and Ohio Valley Electric Corp. Systems, AIEE Trans. on Power Apparatus and Systems 75, Pt. III, 583-592 (Aug.).
- Robertson, L.M., W.E. Pakala, and E.R. Taylor (1961), Leadville High Altitude EHV Test Project, Pt. III: Radio influence investigations, AIEE Conf. Paper No. CP61-236, AIEE Trans. on Power Apparatus and Systems 80, Pt. III, 732-748 (Dec.).
- Renaudin, D. (1953), Measurement of radio frequency caused by high voltage lines, Bull. Soc. Franc. Electriciens, 425-431 (July 3).
- Robertson, L.M., and J.K. Dillard (1961), Leadville High Altitude extra high voltage test project, Pt. I: Report of 4 years of testing, AIEE Conf. Paper No. CP61, AIEE Trans. on Power Apparatus and Systems 80, No. 57, Pt. III, 715-725 (Dec.).
- Robertson, L.M., C.F. Wagner, and T.J. Bliss (1957), Colorado high-altitude corona test scope, tests and instrumentation, AIEE Trans. Power Apparatus Systems 76, Paper No. 57-161, Pt. III, 356-366 (June).
- Roca, G. (1957), Evaluation of radio interference from hot cathode fluorescent lamps, Material Lab., New York Naval Shipyard, (July).
- Roca, G. (1957), Investigation of radio interference from cold cathode fluorescent lamps, Material Lab., New York Naval Shipyard, (July).

- Rorden, H.L. (1947), Radio noise influence of 230 kV lines, AIEE Trans. 66, 677-681, (Discussion p. 682).
- Rorden, H.L., and R.S. Gens (1952), Investigation of radio noise as it pertains to the design of high-voltage transmission lines, AIEE Trans. 71, Pt. III, 466-477.
- Rorden, H.L., and R.S. Gens (1952), Radio noise in relation to the design of high-voltage transmission lines, Elec. Engrg. 71, No. 10, 873-879 (Oct.).
- Rosa, Albert J. (1970), HF and VHF automobile ignition measurements, Paper II-E, 70C64-REGEMC, 1970 IEEE Regional EMC Symp. Record, San Antonio, Texas (Oct.).
- St. Clair, H.P. (1957), 345 kV transmission progress report, AIEE Trans. Power Apparatus Systems 76, Pt. III, 512-518 (Aug.).
- Sayers, D.P., J.S. Forrest, and F.L. Lane (1952), 275 kV developments on the British grid system, J. IEE 99, No. 11, p. 582.
- Schildknecht, R.O. (1962), Ignition interference to UHF communication systems, IRE Trans. on RFI 4, No. 3, 63-66 (Oct.).
- Schumann, W.O. (1952), Über die Strahlungslosen Eigenschwingungen einer leitenden Kugel, die von einer Luftschicht und Einer Ionosphärenhülle umgeben ist, A. Naturforsch 7A.
- Scroggie, M.G. (1950), Interference from television receivers, Wireless World 56, No. 4, 126-129 (Apr.).
- Sepp, W.E. (1965), HF radio noise levels, Clark AF Base, Philippines, USAF, Pacific GEEIA Region, PGR-EMC-65-03 (Nov.).
- Sepp, W.E. (1966), Characteristics of the HF spectrum and the influence of man-made noise on the environment, Okinawa, U.S. Air Force, Pacific GEEIA Region, PGR-EMC-66-41 (April).

- Shepherd, Richard A., James C. Graddie, V.E. Hatfield, and G.H. Hagn (1973), Measurements of automobile ignition noise at HF, Stamford Res. Inst., Final Rept. prepared for Naval Electronics Systems Command, Contract N00039-7-A-0223.
- Shorey, L.F., and S.M. Gray (1947), Preliminary study of radio interference caused by fluorescent lamps in home, Illum. Engr. 42, No. 3, 365-376 (Mar.).
- Simpson, L.C. (1953), Israel intercity VHF telecommunication systems, RCA Rev. 14, 100-124 (Mar.).
- de Sisdelfen, J. Jayer, and W. Walter (1957), Contribution to the estimation of radio interference from high-voltage power lines, Swiss Postal Telegraphy and Telephone Commission Tech. Bull. PTT No. 11, 456-479.
- Skilling, H.H. (1951), Electric Transmission Lines (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Skomal, E.N. (1964), Distribution and frequency dependence of unintentionally generated man-made VHF/UHF noise in metropolitan areas, Aerospace Corp. TDE-469(55805-45-1, BSD-TR-64-167.
- Skomal, E.N. (1964), Distribution of man-made VHF/UHF noise in metropolitan areas, Aerospace Corp. Rept. TDR-469-(55805-45)-1.
- Skomal, E.N. (1965), Distribution and Frequency Dependence of Unintentionally Generated Man-made VHF/UHF Noise in Metropolitan Areas, Pt. I: IEEE Trans. on Electromagnetic Capability, EMC-7, No. 3, 263-278 (Sept).
- Skomal, E.N. (1965), Distribution and frequency dependence of unintentionally generated man-made VHF/UHF noise in metropolitan areas, Pt. II: Theory, IEEE Trans. on Electromagnetic Compatibility, EMC-7, 420-427 (Dec.).
- Skomal, E.N. (1966), Analysis of the frequency dependence of man-made radio noise, IEEE Internatl. Convention Record, Pt. II, 125-129.

- Skomal, E.N. (1967), Comparative radio noise levels of transmission lines, automotive traffic, and rf stabilized arc welders, IEEE Trans. on Electromag. Compatibility, EMC-9, 73-77 (Sept.).
- Skomal, E.N. (1967), Man-made Noise, Pt. I: Sources and characteristics, Frequency U.S.A., 5, No. 1, 14-19 (Jan.).
- Skomal, E.N. (1967), Man-made noise, Pt. II: Experimental data, Frequency U.S.A. 15, No. 2, 12-17 (Mar.).
- Skomal, E.N. (1969), Analysis of airborne VHF/UHF incidental noise over metropolitan areas, IEEE Trans. Electromag. Compatibility EMC-11, 76-83 (May).
- Skomal, E.N. (1969), "Distribution and frequency dependence of incidental man-made HF/VHF noise in metropolitan areas, IEEE Trans. on Electromag. Compatibility EMC-11, 66-75 (May).
- Skomal, E.N. (1969), Dimensions of radio noise, IEEE EMC Symposium Record 11, Asbury Park, N.J., June 17-19, pp. 18-28.
- Skomal, E.N. (1970), Conversion of area distributed incidental radio noise envelope distribution functions by radio propagation processes, IEEE Trans. on Electromag. Compatibility EMC-12, No. 3, 83-88 (Aug.).
- Skomal, E.N. (1970), Experimental evidence of the range and frequency transformation of incidental man-made radio noise statistics, Aerospace Corp., San Bernardino, Calif.
- Skomal, E.N. (1970), The range and frequency dependence of VHF/UHF man-made radio noise in and above metropolitan areas, IEEE Trans. on Vehicular Technol. VT-19, No. 2, 213-221 (May).
- Skomal, E.N. (1971), Emerging trends in UHF incidental noise, IEEE Mountain-West EMC Conf Record 71C60-EMC, 155-166.
- Skomal, E.N. (1971), Recent extensions of composite incidental man-made noise data and their relevance to the hypothesis of the noise envelope statistic transformation, IEEE Internatl. EMC Symposium Record 71C29-EMC, 222-234.

- Slemon, G.R. (1949), Radio influence from high voltage corona, AIEE Trans. 68, Pt. I, 198-204; discussion, 204.
- Smith, A.B. (1935), Radio interference from telephone equipment, Western Soc. Engrs. J. 40, No. 131 (Aug.).
- Smith, George S., and Andrew B. Jacobsen (1952), Radio influence from power transmission lines - effects of wind, dust and smoke, AIEE Trans. 71, Pt. III, 932-938.
- Smith-Rose, R.L. (1929), Man-made Static: High-voltage overhead electrical transmission lines and radio interference, Wireless World 24, 476-480.
- Society of Automotive Engrs (SAE) (1945), Motor vehicle electrical interference with radio, Summary rept. by SAE Subdiv. VIII, Vehicle Radio Interference (Aug.).
- Society of Automotive Engrs. (SAE) (1969), Measurement of electromagnetic radiation from motor vehicles, Standard J551a.
- Spaulding, A.D., R.T. Disney, and L.R. Espeland (1969), Noise data and analysis, Phase C, Final Rept. to Space and Missile Systems Organ., ERLTM-ITS 184, ESSA Res. Labs. under Contract No. F04701-68-F-0072, Proj. 672A.
- Spaulding, A.D., Ahlbeck, W.H., and L.R. Espeland (1971), Urban residential man-made radio noise analysis and predictions, Telecomm. Tech. Res. & Engr. Rept. OT/TRER 14, U.S. Dept. of Commerce, Boulder, Colorado (June).
- Spaulding, A.D., and L.R. Espeland (1971), Man-made radio noise characteristics on and in the vicinity of military and other government installations (u), Telecomm. Tech. Memo. OT-TM-48 (confidential), U.S. Dept. of Commerce, Boulder, Colorado (July).
- Sporn, P., E.L. Peterson, I.W. Gross, and H.P. St. Clair (1951), The 300/315 kV extra high voltage transmission system of AGE, AIEE Trans. 70, Pt. I, 64-72.

- Sporn, Philip, and A.C. Monteith (1950), Progress report on Tidd 500 kV test project of the American Gas and Electric Company--Corona, radio influence and other factors, AIEE Trans. 69, Pt. II, 891-897; discussion, 897.
- Sporn, Philip, and W.S. Price (1956), Operation of the 330 kV system of American Gas and Electric Co. and Ohio Valley Electric Corp., Rept. 409, Internatl. Conf. on Large Electric Systems III.
- Srikontan, S. (1964), Interference suppression studies, Noise and Interference Monitoring Studies, Moore School of Elec. Engrg. Final Rept. MSEE-64-25, Vol. 3, Contract AF 30-602-2888, Proj. No. 4540, Moore School of Elec. Engrg., Univ. of Pennsylvania, Philadelphia, Pa. (Oct.).
- Srivastava, B.B. (1968), Characteristics of electrical noise on extra high voltage transmission lines and their measurement, Indian J. Pure Appl. Phys. 6, No. 8, 434-436 (Aug.).
- Steinberg, J.L. (1967), Le bruit radio electrique dans l'espace, Onde Electrique 47, No. 488, 1269-1271 (Nov.).
- Sullivan, A.W. (1951), Low frequency noise and propagation studies, Industrial and Engrg. Res. Sta., Univ. of Florida, Gainesville, Fla. (June 30).
- Sullivan, A.W. (1952), Noise study, fabrication of noise-measuring equipment, and data collection and collation program, Interim Engrg. Rept. No. 13 (Apr. 1-31).
- Surdin, M. (1943), Distribution in time of spontaneous fluctuation voltage, Phil. Mag. 34, 716-722.
- Suzuki, H. (1963), Characteristics of city noise in the UHF band, J. Inst. Elec. Comm. Engrs., Japan 46, 186-194 (Feb.).
- Suzuki, H., and Miyamoto (1962), Interference to tv signals by noise from the ignition systems of automobiles, Rept.: Telecomm. Union Annual Meeting, p. 1321.

- Swanson, E.S. (1958), Radio noise and interference test data, Magnavoc Co., Ft. Wayne, Ind., Ser. No. 61376-516.
- Sylvania Electronic Systems (1963), Report of UHF propagation and ignition interference tests, Sylvania Electronic Systems, Central Engrg. Labs., TR 08-63, Buffalo, N.Y. (July).
- Szymik, F., B. Szewc, and K. Kmuda (1969), Research on corona radio noise in 400 kV transmission line, Energetyka (Poland) 23, No. 8, 267-272 (Aug).
- Taggart, H.E. (1962), Radio frequency interference from a digital computer, NBS Rept. No. 7282, Natl. Bur. Standards, Boulder, Colo. (Aug).
- Taylor, E.R., Jr., N. Koleiv, and W.E. Pakala (1965), The Apple Grove 705 kV project: 775 kV radio influence and corona loss investigations, IEEE Trans. PAS 84, No. 7, 573-679 (July).
- Taylor, F.L., C.J. Crockford, R.V. Nicolson (1957), Investigation of radio noise from existing lines and equipment to aid in the design of future extra high voltage lines, AIEE Trans. III, 76, 436-445.
- Tech. Comm. for Radio-Noise (Japan) (1960), Present situation of noise interference to radio signals, Annual Rept. of Tech Comm. for Radio Noise (Japan), p. 39 (Dec).
- Temshok, M. (1948), Relative surface voltage gradients of grouped conductors, AIEE Trans. 67, Pt. II, 1583-1589, (discussion p. 1591).
- Terman, F.E. (1943), Radio Engineers Handbook, Sec. 10, par. 18 (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Thompson, R.L., L.O. Barthold, J.J. LaForest, and C.B. Lindh (1963), 500 kV line design, IEEE Trans. PAS-67, 587-599.
- Tuttle, P.D., W.E. Pakola, and H.L. Rorden (1957), Radio influence effects of surface treatments on small conductors, AIEE Trans. Conf. Paper 57-802.

- Ungstrup, E. (1963), Observations of ULF radio noise at Godhavn, Greenland, AF Cambridge Res. Lab., Cambridge, Mass (Jan).
- Use, G. (1954), Pruefung der Funkstoerwirkung von Hochfrequenz-u aerme-Geraeten, Elektrotech. Zeit (Ed. A) 75, No. 11, 357-362 (June).
- Van Atta, E., and E.L. White (1929), Radio interference from line insulators, J. AIEE 48, p. 682 (Sept.).
- Von Hoerner, S. (1963), The level of noise and interference between 216 and 420 Mc/s and the best frequencies for lunar occultation work, Internal Rept., Natl. Radio Astronomy Observatory, Green Bank, W. Virginia (June).
- Vincent, W.R. (1971), Initial man-made noise measurements at selected sites, SRI unclassified paper in RF Spectrum Conf. February 10-12, NSA(W-65); undated full rept. classified.
- Vincent, W.R. (1971), Observations of man-made noise and rfi in urban and suburban areas, IEEE Mountain-West EMC Conf. Record 71C60-EMC, 183-189.
- Vincent, W.R., and A.M. Peterson (1961), Interference in satellite communications systems, Paper presented at URSI Symp. on Space Communication Research, Paris, pp. 18-22 (Sept.).
- Wagner, C.F., Anthony Wagner, E.L. Peterson, and I.W. Gross (1947), Corona considerations on high voltage lines and design features of T.dd 500-kV test lines, AIEE Trans. 66, 1583-1590.
- Waldron, J.M. (1970), Vehicle generated electromagnetic interference, Proc. IRE Eng. Aust. 31, No. 8, 279-283 (Aug.).
- Walter, W., and J. Moyer de Sisdelhafen (1957), Contribution to the estimation of radio interference from high voltage power lines, Swiss Postal, Telegraphy & Telephone Comm. Tech. Bull. PTT No. 11, 456-479.

- Ward, W.W., R.L. Sicotte, K.H. Hurlbut, and C.J. Zamites, Jr. (1970), The results of the LES-5 and LES-6 RFI experiments, Tech. Note No. 1970-3, Lincoln Lab., MIT, Lexington, Mass. (Feb. 6).
- Warren, A.C. (1935-36), Broadcast interference investigation, Post Office Radio Service 28, p. 23.
- Weeks, Andrew S., and Albert D. Bailey (1970), Azimuthal distribution and characteristic properties of ambient noise at HF, PRL Publica. 387, Tech. Rept. No. 23, Radio-location Res. Lab., Dept. of EE, Univ. of Illinois, Urbana, Ill. (Dec.).
- White, D.R.J., S. Waclo, J.D. Osburn, and R.R. McDonald (1970), Spectrum pollution in metropolitan Washington, D.C., IEEE Reg. Electromag. Compatibility Symp. Record, San Antonio, Texas, Oct. 6-8, Session II-A, 9 pp.
- Whitehead, S. and L.H. Daniels (1935), The magnitude of the radio frequency disturbance from trolley buses and the use of condensers and other devices in its suppression, British Elec. Res. Assoc. (London), Rept. M/T39.
- Willwacher, E. (1970), Broadband over-the-horizon radio relaying systems, Tech. Mitt. AEG-Telefunken 60, No. 1, 35-40.
- Wireless World (1950), Interference from flourescent tubes, Wireless World 56, No. 3, 93-94 (Mar.).
- Wright, F.H., and S.A. Zimmermann (1956), Evaluator of radio influence voltages in flourescent lighting installations, AIEE Trans. 75, Pt. 2, Applications and Industry, No. 24, 96-99 (May).
- Young, W. Row, Jr. (1952), Comparison of mobile radio transmission at 150, 450, 900 and 3700 Mc/s, Bell System Tech. J. 31, 1068-1085 (Nov.).
- Young, W.R., Jr., and L.Y. Lacy (1950), Echoes in transmissions at 450 Mc/s from land to car radio units, Proc. IRE 38, 255-258 (Mar.).

- Zacharisen, D.H., A.F. Barghausen, R.T. Disney, R.J. Matheson, and L.D. Schultz (1971), Interference and compatibility monitoring and measurements for UHF satellite earth terminals, Telecomm. Tech. Memo. OT-TM-69, Dept. of Commerce, Boulder, Colorado.
- Zamiter, C.J., JR., and K.H. Hurlbut (1970), Measurement of interference levels in the UHF band from aircraft altitude, IEEE Trans. on Electromag. Compatibility EMC-12, No. 3, 88-95 (Aug.).

Section II

APPLICATIONS OF RADIO NOISE DATA TO SYSTEMS ANALYSIS, MATHEMATICAL MODELING OF RADIO NOISE PARAMETERS, AND ENVIRONMENTAL MODELING

- Adams, G.E. (1956), The calculation of the radio interference level of transmission lines caused by corona discharges, AIEE Trans. 75, Paper No. 56-222, p. 411-419.
- Aggers, C.V., W.E. Pakala, and W.A. Stickel (1943), Effect of radio frequencies of a power system on radio receiving systems, AIEE Trans. 62, 169-72.
- Akima, H. (1967), Speeding-up of HF radio transmissions and broadcasts, World Weather Watch Study T.21, ESSA Tech. Rept. IER34-ITSA34.
- Akima, Hiroshi (1970), Modulation studies for IGOSS, ESSA Tech. Rept. ERL172-ITS 110, U.S. Government Printing Office, Washington, D.C. 20402.
- Akima, Hiroshi, Gene G. Ax, and Wesley M. Beery (1969), Required signal-to-noise ratios for HF communications systems, ESSA Tech. Rept. ERL 131-ITS 92, Aug., U.S. Government Printing Office, Washington, D.C. 20402.
- Algazi, V., and R. Lerner (1966), Binary detection in white nonGaussian noise, IEEE Trans. on Information Theory IT-12 (April).
- Allnalt, J.W., and R.D. Prosser (1966), Subjective quality of colour-television pictures impaired by random noise, Proc. IEE (GB) 113, No. 4, 551-557 (April).
- Amo, Kohei (1954), Signal-to-noise discrimination in amplitude limiters, ERL Tech. Rept. No. 17, Contract Nonr-22410 (Aug.2).

- Angwin, A.S. (1933), Electrical interference with broadcasting, Telegraph and Telephone J. 19, p. 200.
- Antonov, O. (1967), Optimum detection of signals in nonGaussian noise, Radio Engrg. and Electron. Phys. 12, 541-548 (Dec.).
- Arthurs, E., and H. Dym (1962), On the optimum detection of digital signals in the presence of white Gaussian noise - a geometric interpretation and a study of three basic data transmission systems, IRE Trans. on Commun. Systems 10, No. 4, 336-372 (Dec.).
- Aubrun, J-N, and P. Veillet (1963), Transmission du Bruit par les systemes a gain periodique, Application aux echantillons, Compt. Rend. 256, No. 8, 1696-1699 (Feb. 18).
- Azuma, (1952), Method of calculating field intensity for tv broadcasting service, Television - Gakaishi 1 (May).
- Azuma, (1956), Telecommunication and noise, Tsushinkogaku-Koza, Kyoritsu Publica. Co. 68, p. 105 (Feb.).
- Babanov, Yu. N. (1967), K teorii optimal'nogo AM-radiopriema v usleviyakh deistviya fluktuatsiennogo shuma, Radiotekhnika i Elektronika 12, No. 9, 1545-1554 (Sept.).
- Baghdady, E.J. (1961), Analog Modulation Systems, Lectures on Communica. System Theory, E.J. Baghdady, ed., pp. 439-555, (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Barhydt, C. (1933), Radio noise meter and its application, General Electric Rev. 36, 20]-205.
- Barsis, A.P., K.A. Norton, P.L. Rice, and P.H. Elder (1961), Performance predictions for single tropospheric communication links and for several links in tandem, U.S. Dept of Commerce, Natl. Bur. Standards, Tech. Note No. 102 (Aug.).
- Beckfor, I.M. (1948), High frequency reception in strong noise fields, Radio N 39, p. 168.

- Beach, A.R., P.O. Laitenum, and F.H. Dickson (1949), Minimum required field intensities for intelligible reception of radiotelephony in presence of atmospheric or receiving set noise, Radio Propaga. Unit Tech. Rept. No. 5, U.S. Army Signal Corps (Oct.).
- Beckmann, P. (1964), Amplitude probability distributions of atmospheric radio noise, Radio Science 68, No. 6, 723-736.
- Bello, P.A. (1965), Error probabilities due to atmospheric noise and flat fading in HF ionospheric communications systems, IEEE Trans. on Communica. Technol. COM-13, No. 3, 266-269 (Sept.).
- Bello, P.A. (1966), Bounds on the error probability of FSK and PSK receivers due to nonGaussian noise in fading channels, IEEE Trans. on Information Theory, IT-12, No. 3, 315-326 (July).
- Bello, P.A., and Raffaele Esposito (1969), A new method for calculating probabilities of errors due to impulsive noise, IEEE Trans. on Communica. Technol. COM-17, 368-379.
- Bello, P.A., and R. Esposito (1970), Error probabilities due to impulsive noise in linear and hard/limited DPSK systems, Tech. Memo. No. T-857, Research Div., Raytheon Co., Waltham, Mass.
- Bendat, J.S. (1958), Principles and Applications of Random Noise Theory (Wiley and Sons, Inc., New York, N.Y.).
- Bennett, W.R. (1944), Response of a linear rectifier to signal and noise, J. Acoustical Soc. of America 15, 164-172 (Jan.).
- Bickford, I.M. (1948) High frequency reception in strong noise fields, Radio News 39, No. 4, P. 168 (April).
- Blackman, N.M. (1966), Noise and Its Effects on Communications (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Blake, L.V. (1961), Recent advancements in basic radar range calculation technique, IRE Trans. Mil. Electr. MIL-5, No. 2, 154-164 (April).

- Blanc-LaPierre, A. (1950), Elementos de matematicas necesarios para el estudio del ruido en radio, Revista Electrotecnica 36, No. 8, 291-299 (Aug.).
- Bohme, J.F. (1968), On a model of random noise in space, Arch Elekt Ubertragung (Germany) 22, No. 12, 585-590 (Dec.).
- Bol'shakov, L.A., V.G. Latysh, Yu. N. Minin (1968), Determining the number of signals forming a random stream in a noise background, Tekh. Kibernetika (USSR), English transl. in Engrg. Cybernetics, No. 3, 73-80 (May).
- Bond, F.E. (1949), Measurements of noise, crosstalk, volume and related quantities in communication systems, Rept. No. M-1180, Coles Signal Lab., Belmar, N.J.
- Bowen, B.A. (1963), Some analytical techniques for a class of non-Gaussian processes, Research Rept. No. 63-3, Queens University, Kingston, N.Y.
- Brainard, R.C. (1967), Low resolution TV: Subjective effects of noise added to a signal, Bell Syst. Tech. J. 46, No. 1, 233-260 (Jan.).
- Brook, M., and N. Kitagawa (1960), Electric field charges and the design of lightning-flash counters, J. Geophys. Res. 65, 1927-1932.
- Bullington, Kenneth (1953), Radio transmission beyond the horizon in the 40 to 400 MC band, Proc. IRE 41, 132-135 (Jan.).
- Purgess, R.E. (1951), Rectification and observation of signals in presence of noise, Phil. Mag. 42, No. 328, 475-503 (May).
- Burrill, Charles M. (1942), An evaluation of radio noise meter performance in terms of listening experience, Proc. IRE 30, 473-478 (Oct.).
- Bussgang, J.J., and M. Leiter (1964), Error rate approximations for differential phase shift keying, IEEE Trans. on Communica. Systems, 18-28 (Mar).

- Bykov, V.U., and V.P. Maleichuk (1967), *Primenenie metoda Monte-Karlo dlya issledovaniya reksii amplitudnogo priemnika na kilebanya, modulirovannye fluktuatsiyami, po chastote*, Radiotek. Elektron. 12, No. 8, 1343-1351.
- Caivez, C.A., and K.F. Casey (1969), *Normalized signal-to-noise power ratios of aperture antennas in random signal and noise fields*, IEEE Trans. Ant. Prop. AP-17, No. 2, 232-233.
- Cauchois, J. (1956), *Several aspects of detection from the information point of view*, Ann. Radioelect. 11, 308-316 (Oct.), (in French).
- CCIR (1966a), *Bandwidths and signal-to-noise ratios in complete systems*, Rec. 339-1, Documents of the XIth Plenary Assembly, Oslo, III, pp. 28-30 (replaces Rec. 161).
- CCIR (1966b), *Operating noise-threshold of a radio receiving system*, Rept. 413, Documents of the XIth Plenary Assembly, Oslo, Reports by the Internatl. Working Party III/1, Geneva, 1966.
- CCIR (1970), *Bandwidths and signal-to-noise ratios in complete systems*, Recommendation 339-2, CCIR XII Plenary Assembly, New Delhi, III pp. 33-35 (Replaces 339-1 Oslo, 1966).
- Chang, S.S.L., B. Harris, and J.J. Metzner (1962), *Optimum message transmission in a finite time*, IRE Trans. Infor. Theory 8, No. 5, 215-224.
- Chapin, E.W., I.C. Middlekamp, and W.K. Roberts (1958), *Co-channel television interference and its reduction*, IRE Trans. Systems BTS-10, 3-24 (June).
- Clarke, K.K., and J. Cohn (1958), *Carrier-to-noise statistics for various carrier and interference characteristics*, Proc. IRE 46, No. 5, 889-895.
- Cohen, I.W. (1965), *Signal-to-noise ratio in modulated systems*, Electro-Technol. 76, No. 4, 55-60 (Oct.).

- Convair Div. (1968), Feasibility study of man-made radio frequency radiation measurements from a 200-mile orbit, Rept. No. ZZK 68-007, NASA Contract NAS-1437, Convair Div., General Dynamics, San Diego, Calif. (Feb. 15).
- Conda, Alyce M. (1965), The effect of atmospheric noise on the probability of error for an NCFSK system, IEEE Trans. on Commun. Technol. COM-13, No. 3, 280-282 (Sept.).
- Crichlow, W.Q. (1948a), Nomograms for the determination of the radiated power required for a high frequency broadcast service, NBS Rept. CRPL Rept. 4-5, U.S. Dept. of Commerce, Boulder, Colorado.
- Crichlow, W.Q. (1948b), The effects of antenna circuit loss, receiver noise, and external noise on radio reception in the frequency band from 50 to 5000 kc., NBS Rept. CRPL-4-4 (May).
- Crichlow, W.Q., and R.T. Disney (1961), Predictions of radio noise and systems application, NBS Course in Radio Propagation, Lecture No. 31, Ionospheric propagation (Feb.).
- Crippen, L.J. (1970a), Statistical parameters of radio noise, IEEE Reg. EMC Symposium Record, San Antonio, Texas, Oct. 6-8, Session I-B, 14 pp.
- Crippen, L.J. (1970b), Study of the statistical parameters of radio noise, Tech. Bull. No. 5, Naval Electron. Systems Test and Eval. Facility (NESTEF), (June).
- Crippen, L.J. (1971), Investigation of radio frequency interference at Edzell, Scotland, Final Rept., Proj. No. 70-157, Serial No. 4, Naval Electron. Systems Test and Eval. Facility (Mar. 13).
- Cunningham, W.J., S.J. Goffard, and J.C.R. Licklider (1947), The influence of amplitude limiting and frequency selectivity on the performance of radio receivers in noise, Proc. IRE 35, No. 10, 1021-1025 (Oct.).

- Darling, D.A., and A.J.F. Seigert (1957), A systematic approach to a class of problems in the theory of noise and other random phenomena, I, IEEE Trans. Informa. Theory IT-3, No. 1, 32-37 (Mar.).
- Davenport, W.B., and W.L. Root (1958), Random Signals and Noise (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Dean, C.E. (1960), Measurements of the subjective effects of interference in television reception, Proc., IRE 48, No. 6, p. 1035.
- Dickey, F.R., A.G. Emslie, and H. Stockman (1948), Extraction of weak signals from noise by integration, Rept. No. E5038, Air Materiel Command, Cambridge Field Station, Cambridge, Mass.
- Dickson, F.H., J.J. Egli, J.W. Herbstreit, and G.S. Wickizer (1953), Large reductions of VHF transmission loss and fading by the presence of a mountain obstacle in beyond line-of-sight paths, Proc. IRE 41, 967-969 (Aug.).
- Dishington, R.S. (1960), The probability density threshold probability and spectrum of noise out of a multiplier, RADC-TN-59-27, Ramo-Woolridge Corp., Los Angeles, Calif. (May).
- Disney, R.T., A.D. Spaulding, and L.R. Espeland (1969), High frequency electromagnetic interference environmental changes expected from future development near U.S. Navy antenna sites, Bremerhaven, ESSA Tech. Memo. ERLTM-ITS 165, U.S. Dept. of Commerce, Boulder, Colorado.
- Downing, J.J., N.N. Berger, F.F. Fulton, Jr., and D.P. Harris (1961), Interference considerations for communication satellites, Paper 29/2, WESCON Conv. Recprd. San Francisco, Calif.
- Bucot, C. (1966), Noise problems involved in signal transmissions at microwave and at optical frequencies, Acta Electronics (France) 9, No. 3, 215-226 (July).

- Edwards, A.G. (1956), The effect of atmospherics on tuned circuits, IRE 16, 31-39.
- Emerson, R.C. (1953), First probability densities for receivers with square law detectors, J. Appl. Phys. 24, No. 9, 1168-1176.
- Engel, J.S. (1965), Digital transmissions in the presence of impulsive noise, British Scientific Tech. J. XLIV, No. 8 (Oct.).
- Engen, G.F. (1970), A new method of characterizing amplifier noise performance, IEEE Trans. Instr. Measr. IM-19, No. 4, 344-349.
- Enslow, P.H. (1962), Noise figures, noise temperatures, and system sensitivity, Stanford Electron. Lab., Menlo Park, Calif.
- Erickson, L.G. (1951), Simplified 48-channel carrier telephone system, AIEE Trans. 70, p. 56 (Jan.).
- Evans, J.E. (1969), Preliminary analysis of ELF noise, Tech. Note 1969-18, Lincoln Labs., MIT, Cambridge, Mass. (Mar. 6).
- Evans, J.E. (1969), Probability density function estimation (with applications to receiver design for reception in non-Gaussian noise), Tech. Note 1969-47, Lincoln Labs., MIT, Cambridge, Mass. (Aug. 29).
- Evans, J.E., and A.S. Griffiths (1972), Design of an ELF noise processor IEEE Internatl. Conf. on Engineering in the Ocean Environment Record, 72CH0660-1 OCC, pp. 151-165.
- Fang, R.J.F., and L.S. Golding (1969), Interference between PSK and FM systems, Paper No. 69CP424-COM, IEEE/ICC, Boulder, Colo. (June 9-11).
- Fano, R.M. (1961), Transmission of Information (MIT Press, Cambridge, Mass.).
- Feldman, J.R., and J.N. Faraone (1961), An analysis of frequency shift keying systems, Proc. Natl. Electron. Conf. 17, 530-542.

- Fink, D.G. (1962), Basic issues of spectrum conservation, Panel: Electro-Magnetic Compatibility - Its Significance to Our Survival.
- FitzGerrell, R.G., L.L. Haidle, and J.E. Partch (1970), A surface-wave transmission line for vehicular communications, Final Tech. Rept. for U.S. Dept. of Transportation, Office of High Speed Ground Transportation, U.S. Dept. of Commerce Boulder, Colo., p. 49 (Feb.).
- Fleck, J.T., and E.A. Trabka (1961), Error probabilities of multi-state differentially coherent phase shift keying systems in the presence of white Gaussian noise, Investigation of Digital Data Communications Systems, Rept. No. UA1420-S-1, Detect. Memo. No. 2A, J.G. Lawton, ed., Cornell Aeronautical Lab., Inc., Buffalo, N.Y. (Jan.).
- Flohrer, W. (1969), Time function and occurrence distribution of function values, Frequenz (Germany) 23, No. 4, 114-116 (April).
- Florman, E.F. (1968), Message errors and message-channel signal-to-noise ratios, IEEE Trans. Commun. Technol. COM-16, No. 4, 576-581.
- Foldes, G. (1960), The log normal distribution and its application to atmospheric studies, Statistical Methods in Radio Wave Propagation, Proceedings of a symposium at Univ. of California, Los Angeles, Calif., W.C. Hoffman, ed., pp. 227-232 (Pergamon Press, Oxford England).
- Foust, C.M., and C.W. Frick (1943), Measurements pertaining to coordination of radio reception with power apparatus and systems, AIEE Trans. 62, 284-291 (June).
- Fredendall, G.L., and W.L. Behrend (1960), Report of the Television Allocations Study Organization, Pt. I: Picture quality procedures for evaluating subjective effects of interference, Proc. IRE 48, No. 6, 1030-1034.

- Fubini, E.G., and D.C. Johnson (1948), Signal-to-noise ratio in AM receivers, Proc. IRE 36, No. 12, 1461-1466 (Dec.).
- Fuller, A.T. (1963), Notes on the random telegraph signal as an approximation to Gaussian white noise, J. Electron. and Control 14, No. 6, 669-673 (June).
- Furutsu, K., and T. Ishida (1960), On the theory of amplitude distribution of impulsive random noise and its application to atmospheric noise, J. Radio Res. Labs. of Japan 7, No. 32, 279-307.
- Furutsu, K., and T. Ishida (1961), On the theory of amplitude distribution of impulsive noise, J. Appl. Phys. 32, 1206-1221.
- Galejs, J. (1966), Amplitude distribution of radio noise at ELF and VLF, J. Geophys. Res. 71, 201-216.
- Gatkin, N.G., Yul Dalelskii, and L.G. Krasnyl (1970), Detection of a signal with unknown initial phase on the background of nonstationary interference, Izv Vyssh Ucheb Zaved, Radioelek 13, No. 3, 293-298.
- George, T.S. (1947), Statistical theory of noise, Rept. No. 102, Philco Corp. Res. Div., Philadelphia, Pa. (Dec.).
- Gill, A.J., and S. Whitehead (1938), Electrical interference with radio reception, IRE J. 83, No. 501, 345-86; discussion 386-394; see also: abstract in Engr 165, No. 4291, p. 392 (April 8, 1938).
- Gillillard, K.E., and T.A. Brewer (1974), Experimental verification of ignition noise APO model and digital-receiver bit-error probability model, ITT Res. Inst., ECAC, Rept. ESD-TR-73-036.
- Gillillard, K.E. (1972), Models of nondensity receiver performance in general noise, ITT Res. Inst., ECAC, North-Severn, Annapolis, Md. 21402, Report No. ESO-TR-72-295.

- Hamburger, G.L. (1946), The effect of bandpass characteristics in the study of radio interference, Tech. Rept. M/T86, British Electrical and Allied Industries Research Assoc., London (Jan. 30).
- Hannock, J.C., and P.A. Wintz (1966), Signal Detection Theory (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Hawley, M.E. (1954), Study of communication in high-level ambient noise fields, ASTIA-DOSC, RCA, Princeton, N.J.
- Hartley, H. (1968), Wideband technique for improving FSK reception in atmospheric noise, Natl. Electronics Conf. Proceedings, pp. 528-532.
- Heaps, H.S. (1955), Effect of random noise background upon detection of unrecorded signal, Can. J. Phys. 33, No. 9, 509-520.
- Helstrom, C.W. (1968) Statistical Theory of Signal Detection (Pergamon Press, Oxford, England).
- Hogg, D. (1953), Tests on the Mark VII decca receiver in atmospheric noise, Res. Rept. No. ETR-13, South African CSIR Telecommunica. Research Lab., Pretoria, So. Africa (July).
- Hsu, H.P. (1967), Comments on "Distribution and frequency dependence of unintentionally generated man-made VHF/UHF noise in metropolitan areas, Pt. II: Theory", IEEE Trans. on Electromag. Compatibility EMC-9, No. 1, 23-24.
- Hu, C.T. (1969), Optimum reception of FM radar by the technique of parameter estimation, Paper No. 47.6, IEEE Internatl. Conf. on Communications, Boulder, Colo., June 9-11.
- Huang, C.M. (1969), Characteristics of man-made noise in Taiwan, Dept. of Elec. Engrg., Natl. Taiwan University (July).
- Intrator, A.M. (1953), Some theoretical considerations concerning radiation from overhead transmission lines, Tech. Rept. R-003, Naval Civil Engrg. Lab., Port Hueneme, Calif., Proj. NY 411-002-1.

- Giordano, A.A. (1970), Modeling of atmospheric radio noise, Ph. D dissertation, Dept. of Elec. Engrg., Univ. of Pennsylvania, Philadelphia, Pa.
- Giordano, A.A., and F. Haber (1972), Modeling of atmospheric noise, Radio Sci 7, 1011-1024.
- Goldberg, J.M. (1963), Voice interference analysis set, instrument for determining degradation of signal quality of voice communication channel, Audio Engr. 11, No. 2, 115-119 (Apr.).
- Grady, D.F. (1959), The zero-crossing problem, Naval Research Laboratory,
- Grinander, U. (1950), Stochastic processes and statistical interference, Arkiv Mat. 1, 195-277.
- Grigorev, A.L., and I.A. Bol'shakov (1968), The Extraction From Noise of Impulse Flows with Restricted After Effects, Pt. II: Nonoverlapping signals and groups of signals, Tekh. Kibernetika (USSR) in Russian. (English transl. in Engrg. Cybernetics, (USA) No. 1, 102-113).
- Gutin, YA.B. (1969), Approximate probability of absence of peaks in the noise envelope in a finite duration interval, Radiotekhnika (USSR), 24, No. 1, 96-98 (Jan.).
- Hall, H.M. (1966), A New Model for Impulsive Phenomena: Application to atmospheric noise communications channels, Tech. Rept. No. 3412-8 and No. 7050-7, Stanford Electron. Labs., Stanford Univ., Stanford, Calif.
- Halton, J.H., and A.D. Spaulding (1966), Error rates in differentially coherent phase systems in non-Gaussian noise, IEEE Trans. Commun. Technol. COM-14, No. 5, 594-601.
- Halsted, L.R. (1963), On binary data transmission errors due to combinations of Gaussian and impulse noise, IEEE Trans. Commun. Systems 11, No. 4, 428-435 (Dec.).
- Hamer, E.G. (1953), Noise performance of VHF receivers, Electron. Engrg. 25, No. 300, pp. 68-70 (Feb.).

- Jackson, R.N. (1959), Subjective assessments of noise in television pictures, Rept. No. 308, Mullard Res. Labs., Redhill, England (July).
- Jacobson, B.B. (1957), Thermal noise in multi-section radio links, IEEE Monograph No. 262R.
- Jancke, G., B. Holmgren, G.A. Petterson, and P. Akerlind (1954), Protective measures against telephone and radio interference from high tension lines, Rept. No. 338, The Internatl. Conf. on Large Electric Systems III.
- Kiselev, A. Z. (1969), Optimum reception of elliptically polarized signals in the presence of randomly polarized noise, Radiotek. Elektronika (USSR) 14, No. 2, 219-229 (Feb). (English transl. in Radio Engrg., Electron. Physics).
- Kleen, W. (1963), Schwankungsvorgaenge in physik und nachrichtentechnik, Physik Bl 19, No. 10, 441-451 (Oct.).
- Jansky, K.G. (1939), An experimental investigation of the characteristics of certain types of noise, Proc. IRE 27, 763-768 (Dec.).
- Jensen, V. (1959), Radio interference in UHF range, Teletek. 3, No. 1, 1-17 (Jan.), (English edition).
- Karpowicz, P. (1969), The influence of external noise upon actual sensitivity of mobile radio communication receivers in the 30-50 MHz band, Przegląd Telekomun (Poland) 41, No. 1, 11-14.
- Kelley, L.C., and A.A. Silva (1961), Median signal power required for reception of radio transmissions in the presence of noise, Tech. Rept. No. 5 (revised), U.S. Army Signal Corps. Radio Propagation Agency.
- Khaytman, Ye, N. (1968), Certain characteristics of a mathematical model of a real complex of interference in the S.W. band, Elektrosvyaz (USSR), in Russian (English transl. in Telecomm. Radio Engrg, Pt. I(USA) 22, No. 3, 56-58, (Mar).

- Khromykh, V.G., and V.G. Potashkin (1969), Distribution functions of signal-to-noise ratios, *Izv. VUZ, Radioelek. (USSR)* 12, No. 2, 210-212 (in Russian).
- Kilvington, T. (1959), Effects of noise in television transmission, *J. TV Soc.* 9, 26-31 (Jan.).
- Kneuer, J.G. (1964), A simplified physical model for amplitude distribution of impulsive noise, *IEEE Trans. Commun. Technol.* COM-12, p. 220 (Dec.).
- Kontorovich, V. Ya. (1971), Some aspects of designing receivers of discrete signals in presence of additional noise with statistics, *Izvestica Vuz Radioelektronika, (USSR)* 14, No. 7, 769-773.
- Korado, V.A. (1970), Optimum detection of signals in the presence of noise with unknown parameters with an upper bound on the false alarm probability, *Radiotekh i Elektron* 15, No. 7, 1419-1427 (July).
- Kotelnikov, V.A. (1959), *The Theory of Optimum Noise Immunity* (McGraw-Hill Book Co., Inc., New York, N.Y.). (Transl. from Russian by R.A. Silverman).
- Kremer, I. Ya. (1966), K voprosu ob analize vliyaniya moduliruyushchikh pomekh, *Radiotekhnika i. Elektronika* 11, No. 8, 1380-1386 (Aug.).
- Kristiansson, L. (1968), The Fokker-Planck equation applied to nonlinear systems, *Ericsson Tech (Sweden)* 24, No. 3, 161-162.
- Kulikowski, J.L. (1964), A survey of new trends in the theory and techniques of reception of signals in noise, *Prace Pit (Poland)*, No. 45, 1-23.
- Kulp, M. (1952), Empfangsstörungen bei FM- und Amempfängern Durch Schwache Storsender, *Arch. Elektr. Übertrag.* 6, No. 1, 17-28 (Jan.).

- Kurz, L. (1962), A method of digital signalling in the presence of additive Gaussian and impulsive noise, IRE Internatl. Conv. Record, Pt. 4, 161-173.
- Lamb, J.J., and E.L. Morrison, Jr. (1966), Impulse interference correlation and excision to prevent errors in digital data reception, IEEE Regional Conf. Record 1, 284-304, Apr. 26-28.
- Landon, V.D. (1941), The distribution of amplitude with time in fluctuation noise, Proc. IRE 29, p. 50.
- Lapin, S.P., and J.J. Suran (1955), Impulse noise in narrow band FM receivers, AIEE Trans. Communica. & Electron. 74, Pt. 1, No. 20, 450-454.
- Lever, F.J.M. (1951), The signal interference ratios needed for the satisfactory reception of AM and FM VHF broadcasting in the presence of ignition system interference, Radio Rept. 2125, Gr. Britain P.O. Engr. Dept. (SEP).
- Lawton, J.G. (1958), Comparison of binary data transmission systems, Proc. Natl. Conv. on Military Electronics, pp. 54-61.
- Lawson, J.L., and G.E. Uhlenbeck (eds.) (1950), Threshold Signals, MIT Radiation Lab., Ser. 24 (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Lechleider, J.W. (1966), Summary of some results in optimum linear communications systems, Proc. IEEE 54, No. 2, p. 321 (Feb).
- Lerner, R.M. (1961), Design of signals in Lectures on Communication System Theory, E.J. Baghdady, ed., pp. 243-277, (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Levin, B.R., and A.F. Kushner (1969), Asymptotically optimal algorithms of detection and extraction of signals from noise, Radiotek. i. Elektronika 14, No. 2, 249-266 (Feb).
- Levitin, L.B. (1965), An ideal physical communication channel, Problems Inform. Transm. 1, 91-93 (Jan-Mar).

- Liao, T.W., W.A. Keen, Jr., and D.R. Powell (1957), Relationship between corona and radio influence on transmission lines, Laboratory Studies, Pt. I: Point and conductor corona, AIEE Trans. PAS-76, Pt. III, 530-540 (Aug).
- Licklider, J.C.R., and S.J. Goffard (1947), Effects of impulsive interference upon AM voice communication, Acoustical Soc. of Am. J. 19, No. 4, Pt. 1, 653-663 (July).
- Lindenlaub, J.C., and K.A. Chen (1965), Performance of matched filter receivers in non-Gaussian noise environments, IEEE Trans. on Commun. Technol. COM-13, No. 4, 545-547 (Dec.).
- Lindenlaub, J.C., and G.R. Cooper (1963), Noise limitations of system identification techniques, IEEE Trans. Auto. Control AC-8, No. 1, 43-48 (Jan.).
- Linfield, R.F. (1965), High performance reliable VLF component of the Naval Advanced Communication System - VLF system design, specification and evaluation process, Final Rept. No. 34-F prepared for U.S. Navy Bur. of Ships, DECO Electronics, Inc., Boulder, Colo. (Mar).
- Linkovskii, Zh.B. (1970), Problem of detecting the signal in the presence of noise by $C \ln I_0$ detectors, Acta Tech. CSAV (Prague) 15, No. 1, 30-31.
- Low, H. (1961), First passage time properties of band-pass limited Gaussian noise, Intern. Analogue Computation Meetings; 3d, Proc. 223-241.
- Lustgarten, M.N., and R.J. Mayher (1969), Application of degradation considerations to a UHF-AM communications system problem, IEEE Internat'l. Conf. on Comm. Record, Session 24, pp. 9-16, June 9-11.
- MacDonald, J.V. (1931), Boston analyzes radio interference: Edison Electric Illuminating Company, Elec. World 97, p. 724 (April 18).

- Magness, T.A. (1953), Some mathematical models of non-Gaussian noise, Univ. of Calif., Scripps Institute of Oceanography, La Jolla, Calif. Bur. of Ships Contract N0bsr-43356,
- Marchand, N. (1946), Interference in frequency modulation, *Communica.* 26, No. 2, 38-40 (Feb.).
- Marimon, L.C., and J.P. Ruina (1956), Some statistical properties of signal plus narrow band noise integrated over a finite time interval, *J. Appl. Phys.* 27, No. 12, 1442-1448.
- Martin, H., and F. Tabor (1972), The electromagnetic compatability of aeronautical communication and navigation systems with radio frequency dielectric heaters and superregenerative receivers, ITT Res. Inst., ECAC, Rept. No. FAA-RD-72-80,11, prepared for U.S. Dept. of Transportation.
- Matheson, R.J., and A.D. Spaulding (1971), Parameters of electromagnetic noise useful in evaluation of telecommunications system performance, ESSA unclassified paper in RF Spectrum Conf. February 10-12, 1971, Natl. Security Agency (W65) undated (full rept. classified).
- Maurice, D., and J.G. Spencer (1950), Electrical noise, *Wireless Engr.* 27, No. 316, 2-12 (Jan.).
- Maurice, R.D.A., M. Gilbert, and J.G. Spencer (1955), The visibility of noise in television, BBC Engrg. Div. Monograph No. 3, Kingswood Warren, Surrey, England (Oct.).
- Maxwell, E.L., F.S. Mathews, and A.D. Watt (1960), Performance of a multi-frequency-shift teletype system, NBS Rept. 6719, Natl. Bur. Standards, U.S. Dept. of Commerce, Boulder, Colorado (Oct. 3).
- Mayo, B.R., and D.K. Cheng (1962), Analysis of correlator signal-to-noise characteristics, *IRE Trans. Comm. Systems* CS-10, No. 3, 276-279 (Sept.).

- McCormick, J.A. (1965), Role of UHF in mobile radio systems, frequency, General Electric Company, Lynchburg, Va. (July-Aug.).
- Mertz, Pierre (1949), Television perception of random noise, NBS Memo., Natl. Bur. Standards U.S. Dept. of Commerce, Boulder, Colo. (Apr.).
- Mertz, P. (1961), Model of impulsive noise for data transmission, IRE Trans. Commun. Systems CS-9, No. 2, 130-137 (June).
- Mertz, P. (1965), Impulse noise and error performance in data transmission, Rand Corp. Memo. RM-4526-PR, Santa Monica Calif. (Apr.).
- Middleton, D. (1948), Some general results in the theory of noise through nonlinear devices, Quart. Appl. Math. 5, 445-498 (Jan.).
- Middleton, D. (1948), Rectification of sinusoidally modulated carrier in presence of noise, Proc. IRE 36, No. 12, 1467-1477.
- Middleton, D. (1949), The spectrum of frequency-modulated waves after reception in random noise, Pt. 1, Quart. Appl. Math. 7, 129-173 (July).
- Middleton, D. (1950), The spectrum of frequency-modulated waves after reception in random noise, Pt. II, Quart. Appl. Math. 8, 59-80 (Apr.).
- Middleton, D. (1952), Statistical criteria for the detection of pulsed carriers in noise, Rept. E5091, AF Cambridge Res. Center, Cambridge, Mass.
- Middleton, D. (1960), Introduction to Statistical Communication Theory (McGraw-Hill Book Co., Inc., New York, N.Y.).
- Middleton, D. (1962), Acoustic signal detection by simple correlators in the presence of non-Gaussian noise, J. Acoustical Soc. Am. 34, 1598-1609 (Oct.).
- Middleton, D. (1972), Statistical-physical models of urban radio noise environments, Pt. I. Foundations, IEEE Trans. Electromag. Compatibility EMC-14, No. 2, 38-56 (May).

- Miller, J. (1972), Detectors for discrete time signals in nonGaussian noise, IEEE Trans. Info. Theory IT-18, 241-250.
- Milic, Patricia L. (1965), Memorandum on the analysis of noise amplitude distributions, Stanford Res. Inst., Menlo Park, Calif.
- Milic, Patricia L. (1965), The power spectrum of noise, Stanford Res. Inst. Menlo Park, Calif.
- Miller, Charles J., Jr. (1956), Mathematical prediction of radio and corona characteristics of smooth, bundled conductors, AIEE Trans. III 75, 1029-1037 (Oct.).
- Miller, C.J. (1957), The calculation of radio and corona characteristics of transmission conductors, AIEE Trans. III 76, 461-472.
- Miller, William (1948), Theory of frequency spectrum of noise due to density fluctuations, Tech. Rept. No. 11, Bur. Ships Contract No. Nobs 34144, Univ. of Pennsylvania, Philadelphia, Pa. (May 11).
- Mityugov, V.V. (1967), Optimum filtering taking quantum effects into account, Probl. Peredachi Inform (USSR) 3, No. 2, 86-91 (Eng. transl. Problems Information Transm. 3, No. 2, 65-68, 1967.
- Modestino, J.W. (1972), A theoretically optimum ELF receiver structure, Tech. Rept. 494, Lincoln Laboratory, MIT, Cambridge, Mass.
- Montano State College (1961), High frequency single side band study program, Endowment and Research Foundation, Montana State College, Bozeman, Mont. (June 27).
- Montgomery, G.F. (1954), A comparison of amplitude and angle modulation for narrow-band communication of binary-coded messages in fluctuation noise, Proc. IRE 42, 447-454 (Feb.).
- Montgomery, G. Franklin (1954), Message error in diversity frequency-shift reception, Proc. IRE 42, 1184-1187 (July).

- Morita, K., I. Higuti, and K. Kashimura (1971), Study of accumulation of thermal noise power due to fading in microwave relay links, Tokyo Electrical Communication Lab. (Nippon T&T) 19, 137-157 (Jan-Feb.).
- Mumford, W.W. and E.H. Scheibe (1968), Noise Performance Factors in Communications Systems, Oldham: Horizon House,
- Nakagami, M. (1940), Study on the resultant amplitude of many vibrations whose phases and amplitudes are random, Jour. Nippon Electron. Commun. Eng. Japan 22, 69-92.
- Nakai, T. (1964), Theory of distribution of pulse duration in Poisson noise process, Electron. & Communica. in Japan 47, No. 3, 44-49 (Mar.).
- Nethercot, W. (1960), Statistical method used in the United Kingdom for observing the radio interference from motor vehicles, Paper C.I.S.P.R./WG 4 (United Kingdom), presented at Working Group meeting, Paris (Sept).
- Nicholson, A.J., and M.J. Kay (1964), Reduction of impulse interference in voice channels, IEEE Trans. on Communica. Technol. Com. 13, No. 4, 218-220.
- North, D.O. (1941/42), Absolute sensitivity of radio receivers, RCA Rev. 6, 332-343.
- North, D.O. (1945), Discussions on "Noise Figures of Radio Receivers", Proc. IRE 33, No. 2, 125-127.
- Norton, K.A. (1942), Discussion on "The Distribution of Amplitude with Time in Fluctuation Noise," Proc. IRE 30, No. 9, 425-429.
- Norton, Kenneth A. (1953), Transmission loss in radio propagation, Proc. IRE 41, p. 146.
- Norton, K.A. (1959), Systems loss in radio wave propagation, NBS J.Res. 63D, No. 1, 53-73.

- Omura, J.K. (1970), Statistical analysis of LF/VLF communication modems, Spec. Tech. Rept 1, Contract DASA-2324, SRI Proj. 7045, Stanford Res. Inst., Menlo Park, Calif. (Mar).
- Orr, I.W. (1953), Wideband amplitude distribution analysis of voltage sources, ASTIA-DSC (Oct.).
- Pakala, W.E., and E.R. Taylor (1968), A method for analysis of radio noise on high-voltage transmission lines, IEEE Trans. on Power Apparatus and Systems 87, 334-345 (Feb.).
- Park, John H., Jr., and Nelson Zagalsky (1970), Performance of interference limited communications systems, Appendix A, A Survey and Forecast of Radio Spectrum Technology, Pt. 1, John H. Park, Jr., Final Rept., ESSA Contract USDC-E22-137-69N, Dept. Elec. Engrg., Univ. of Minnesota, Minneapolis, Minn. (Sept.).
- Parker, N. and D.W. Ruby (1962), Some notes on the calculation of the S/N ratio for a FM system employing a double sideband AM multiplex signal, IRE Trans. Broadcast and Television Receivers BTR-8, No. 1, 42-46 (April).
- Parzen, E. (1960), Modern Probability Theory and Its Applications (John Wiley and Sons, Inc., New York, N.Y.).
- Peterson, P.D. (1969), Effect of non-Gaussian additive noise on a digital data system, Earlham College, Richmond, Ind. (NTIS Access No. AD 861-901), (July).
- Plush, R.W., A.D. Watt, and E.F. Florman (1960), Carrier-to-noise requirements for teletype communication via nonfading or fading UHF carriers, NBS Rept. No. 5585, Natl. Bur. Standards, U.S. Dept. of Commerce, Boulder, Colo. (Feb).
- Pollack, I. (1952), On the effect of frequency and amplitude distortion on the intelligibility of speech in noise, Acoustical Soc. Am. J. 24, No. 5, 538-540.
- Prosin, A.V. (1961), Transient noise in two-path radiowave propagation, Radio Engr. & Electron. Phys. (USSR) 6, No. 11, 1722-1726 (Nov.).

- Reed, I.S., E.J. Kelly, and W.L. Root (1957), The detection of radar echoes in noise; Pt. I: Statistical preliminaries and detector design, Tech. Rept. No. 158, June; Pt. II: The accuracy of radar measurements, Tech. Rept. No. 159, July, MIT Lincoln Lab., Mass. Inst. of Technol., Cambridge, Mass.
- Reznik, A.M. (1965), Structure of optimal receiver for detecting local signal source in noise, Radiotekhnika Elektron. (USSR) 10, No. 6, 969-986 (June).
- Rice, S.O. (1944), Mathematical analysis of random noise, Bell System Tech. J. 23, No.3, 282-332 (July).
- Rice, S.O. (1945), Mathematical analysis of random noise (concluded), Bell Sys. Tech. J. 24, No. 4, 46-156 (Aug).
- Rice, S. O. (1948), Statistical properties of a sine wave plus random noise, Bell Sys. Tech. J. 27, 109-157, Bell Telephone Sys. Tech. Publications, Mono. B-1522 (June).
- Rice, S.O. (1969), Uniform Asymptotic Expansions for Saddle Point Integrals, Application to probability distribution occurring in noise theory, Bell Sys. Tech. J. 47, No. 9, 1971-2013.
- Richard, R., and W. Gore (1963), A nonlinear filter for nonGaussian interference, IEEE Trans. Commun. Systems CS-11, 436-443.
- Richmond, I.J. (1970), Error rates for envelope-detected on-off keying in the presence of interference, Electron Letters 6, No. 18, 575-576.
- Root, W.L., and T.S. Pitcher (1955), Some remarks on statistical detection, IRE Trans. Information Theory IT-1, No. 3, 33-38.
- Rosenbaum, A.S. (1969), Analysis of co-channel interference effects on phase shift keyed radio signals received in Gaussian noise, Paper No. 69CP465-COM, IEEE Internatl. Conf. on Comm., Boulder, Colo. (June 9-11).

- Schildknecht, R.O. (1962), Ignition interference to UHF communications systems, IRE Trans. Radio Freq. Interference RFI-4, 63-66 (Oct.).
- Shakhgil'dyan, V.V. (1965), Influence of a phase-modulated reference signal and noise on a phase AFC system, Elektrosvyaz (USSR) No. 6 (Engl. transl. in Telecomm. Radio Engrg, Pt. 1, No. 6, 15-23 (June).
- Shannon, C.E. (1948), A mathematical theory of communications, Bell Sys. Tech. J. 27, 379-423 and 623-656 (Oct.).
- Shannon, C.E. (1951), Prediction and entropy of printed English, Bell Sys. Tech. J. 30, 50-64.
- Sharer, H.N., V.E. Hatfield, and G.H. Hagn (1972), Man-made radio noise parameter identification task, Stanford Res. Inst., Final Report, prepared for Naval Electronics System Command, Contract N00039-71-A-0223.
- Shchukin, A.N. (1946), On a method of combating impulse interference in radio reception, Bull. Academy Sciences, USSR Phys. Series 10, No. 1, 49-56 (transl. by P.E. Green and W. Dolys).
- Shepedavey, B. (1963), Non-Gaussian noise in binary data phase coherent communications systems, IEEE Trans. Commun. Syst. CS-11, 280-284 (Sept.).
- Shnidman, D.A. (1967), Generalized Nyquist criterion and optimum linear receiver for pulse modulation system, Bell Sys. Tech. J. 46, No. 9, 2163-2177.
- Shnidman, D.A., and D.W. Tufts (1965), Effect of correlated data and colored noise on error probability and mean square error in PAM data transmission, IEEE Internatl. Conv. Record 13, Pt. 7, 227-237.
- Siebert, W. McC. (1956), A radar detection philosophy, IRE Trans. Information Theory IT-2, No. 3, 204-221 (Sept).
- Silleni, S. (1953), Measurement of the intelligibility of radio-telegraph signals, Ann. Geofis. 6, 137-153.

- Simpson, L.C. (1955), System parameters using tropospheric scatter propagation, RCA Rev. 16, 432-457.
- Sisco, W.B. (1964), Bit and message error rates in atmospheric radio noise with and without peak limiting, Space Technol. Labs., Inc., Los Angeles, Calif. Rept. No. 7070-6323-RU-000 (Nov.).
- Smirnow, V.A. (1958), Effects of fluctuation noise in frequency modulated systems, Radio Engr. 13, No. 9, 7-18 (Sept.).
- Smith, A.A., Jr. (1970), Reception of nonhomogeneous signal fields in the presence of homogeneous noise fields, IEEE Trans. Electromag. Compatibility EMC-12, No. 4, 151-158.
- Smith, D.B., and W.E. Bradley (1946), Theory of impulse noise in ideal frequency modulated receivers, Proc. IRE 34, No. 10, 743-751.
- Snyder, D.L. (1968), Optimal binary detection of known signals in nonGaussian noise resembling VLF atmospheric noise, IEEE Wescon Tech. Papers 12, Pt. 4, Session June 4.
- Spaulding, A.D. (1964), Determination of error rates for narrow-band communication of binary coded messages in atmospheric radio noise, Proc. IEEE 52, No. 220-221.
- Spaulding, A.D. (1966), Electromagnetic interference measurement and interpretation, An Appendix to a review of the mathematical modeling in use by the U.S. Dept. of Defense EMC program, Sept., Final Rept. dated Dec. 1, 1966.
- Spaulding, A.D. (1966), The characteristics of atmospheric radio noise and its effect on digital communications systems, IEEE Digest of Technical Papers, Internatl. Conf. on Comm., Philadelphia, Pa., June 15-17.
- Spaulding, A.D. (1968), The noise environment, Electromagnetic Propagation Course June 17-July 3, Lecture No. IX-7, Univ. of Colorado/ESSA, Boulder, Colo.

- Spaulding, A.D. (1969), Characterization of additive disturbances, Lecture Summer Course on Communications Systems and Time-Variant Electromagnetic Propagation Media, June 16-July 3, Univ. of Colorado/ESSA, Boulder, Colo.
- Spaulding, A.D. (1970), Measured versus theoretical performance of receivers of the Minuteman launch control type, Tech. Memo. ERLTM-ITS-234, ESSA, U.S. Dept. of Commerce, Boulder, Colo.
- Spaulding, A.D. (1970), Radio noise environment and electromagnetic compatibility, Lecture 5.5 in ESSA/CU Electromagnetic Sci. Series of Short Courses, Univ. of Colorado, Boulder, Colo.
- Spaulding, A.D. (1971), Amplitude and time statistics of urban man-made noise, IEEE Internatl. Conf. on Communica., Conf. Record, IEEE Catalog No. 71C28-COM.
- Stein, Seymour, and J. Jay Jones (1967), Modern Communications Principals (McGraw-Hill Publi. Co., Inc., New York, N.Y.).
- Stratonovich, R.L. (1970), Detection and estimation of signals in noise when one or both are nonGaussian, Proc. IEEE 58, 670-679.
- Stratonovitch, R.L. (1967), Topics in Theory of Random Noise, vol. 2 (Gordon & Breach, New York, N.Y.).
- Stratonovich, R.L., and Yu. G. Sosulin (1966), Optimum reception of signals in nonGaussian noise, Radiotekhnika Elektron. (USSR) 11, No. 4, 579-591 (April).
- Stuckey, C.W., and J.C. Toler (1967), Statistical determination of EMC, IEEE Trans. Electromag. Compatibility EMC-9, No. 2, 27-34.
- Stumpers, F.L.H.M. (1947), On calculation of impulse-noise transients in frequency-modulation receivers, Phillips Res. Repts. 2, No. 6, 468-474 (Dec.).
- Stumpers, F.L.H.M. (1948), Theory of frequency modulation noise, Proc. IRE 36, 1081-1092 (Sept.).

- Sullivan, A.W., H.M. Van Valkenburg, J.M. Barney (1952), Low frequency atmospheric radio noise in Florida, Am. Geophys. Union Trans. 33, No. 5, 650-656 (Oct.).
- Szyszkiewicz, J. (1969), Noise optimization for estimation of quality improvement, Prace PIT (Poland), No. 63, 1-10.
- Terpugov, A.F. (1964), Signal detection in noise considering some unknown parameters, Radiotekhnika Elektron. (USSR) 9, No. 1, 61-66 (Jan).
- Tetley, W.H. (1961), Analytical prediction of electromagnetic environments, IRE Trans. Commun. Systems CS-9, No. 2, 175-185.
- Thompson, A.S. (1966), Articulation index as predictor of communication link performance in RFI environment, IEEE Region 6 Conf. Record 1, 269-275, Apr. 26-28.
- Thorn, D.A., E.F. Newly, and E.R. Loveless (1940), Comparison of noise measurements with the annoyance values of different types of interference, Grt. Britain P.O. Engrg. Dept. Radio Rept. No. 594.
- Treter, A. (1956), Influence of quasi-impulsive noise on radio receivers, Prace Inst. Laczności 3, No. 4.
- Teikin, I.A. (1962), On the noise immunity of single and double sideband communication systems, Telecomm. & Radio Engrg. Pt 2, No. 4, 1-10 (April).
- Uglow, K.M. (1957), Noise and bandwidth in PDM/FM radio telemetering, IRE Trans. Telemetry and Remote Control TRC-3, No. 1, Paper 3-1 (April).
- Uglow, K.M. (1957), Noise and bandwidth in FM/FM radio telemetering, IRE Trans. Telemetry and Remote Control TRC-3, No. 2, 19-22 (May).
- Van Trees, H.L. (1968), Detection, Estimation and Modulation Theory, Pt. 1 (John Wiley and Sons, Inc., New York, N.Y.).
- Van Vleck, J.H., and D. Middleton (1966), Spectrum of clipped noise, Proc. IEEE 54, No. 1, 2-19 (Jan.).

- Valeev, V.G., and Yu. G. Sosulin (1969), Detection of weak coherent signals in correlated nonGaussian noise, Radiotekhnika Elektron. (USSR) 14, No. 2, 230-238 (Feb). (Engl. transl. in Radio Engrg. Electron. Phys.)
- Vasilev, V.I., and A.A. Kavchuk (1969), Probabilistic analysis of distortions of elementary code messages in presence of pulse noise, Automat. Telemekh (USSR), No. 4, 170-182 (Engl. transl. in Automat. Remote Control).
- Vas'kov, S.T., and D.G. Levchenko (1969), Noise modeling at the input of multichannel receiving systems, Radiotekhnika (USSR) 24, No. 2, 76-80 (Feb). (Engl. transl. in Telecomm. Radio Engrg., Pt. 2).
- Vinokur, M. (1969), Confidence interval for a signal as a function of noise and quantization, IEEE-ICC 1969, Paper No. 69C443-COM, Boulder, Colo., June 9-11.
- Viterbi, A.J. (1966), Principles of coherent communication, Series in Systems Science (McGraw Hill Book Co., Inc., New York, N.Y.).
- Vladimirov, V.I., V.I. Korpukhin, and I. Ya. Kremer (1966), Otsenka vliyaniya moduliruyushchikh pomekh na usoviya razresheniya signalov, Radiotekhnika i. Elektronika 11, No. 8, 1387-1395 (Aug.).
- Vogelman, J.H. (1965), Predicting EMI, Electro-Technol. 75, 46-48 (April).
- Vol'fbein, S.P., and N.G. Veksler (1969), Measurement of reliability loss due to impulsive noise, Elektrosvyaz (USSR) 23, No. 1, 43-45 (Jan), (Engl. transl: Telecomm. Radio Engrg, Pt. 1, 23, No. 1, July).
- Vol'fbein, S.P., and G.A. Yemel'yanov (1969), Probability distribution of edge distortions of binary pulse due to impulsive noise in data transmission channel, Elektrosvyaz (USSR) 23, No. 2, 21-25 (Feb), (Engl. transl. Telecomm. Radio Engrg., Pt. 1, 23, No. 2, Feb).

- Wall, R.A., and G.K. Hutchinson (1966), An interference prediction model, IEEE Trans. on Electromag. Communica. EMC-8, No. 3, 130-142.
- Watt, A.D. (1951), Statistical characteristics of sampled and integrated AM and FM noise, Natl. Res. Lab. Rept. 3856 (Oct.22).
- Watt, A.D., R. Coon. E.L. Maxwell, and R.W. Plush (1958), Performance of some systems in the presence of thermal and atmospheric noise, Proc. IRE 46, 1914-1923.
- Weaver, L.E. (1959), Subjective impairment of television pictures, Elec. and Radio Engrg. 36, 170-179 (May).
- Weiss, G. (1966), The average number of zero crossing per second of a sinusoidal signal plus noise, New York Univ., College of Engrg., New York, N.Y.
- Wetherington, R.D., E.E. Donaldson, and R.W. Moss (1969), Interference predictions - philosophies, objectives and future directions, IEEE Electromag. Communica. Symposium Record, pp. 80-84 (June).
- White, H.E. (1966), Atmospheric noise FSK error probabilities for an envelope detection receiver, IEEE Trans. Communica. Technol. COM-14, No. 2, 188-189.
- Williams, T.R., and J.B. Thomas (1959), An experimental study of detection nonstationary noise, Trans. AIEE I, Comm. and Electron. 78, No. 45, 678-682 (Nov).
- Wittman, J.H. (1965), Performance of phase coded m'ary communication systems in face of average power limited interference, IEEE Int. Convention Record 13, Pt. 2 (Comm 2-Radio Comm. Broadcasting Audio), 147-157.
- Woodward, P.M. (1953), Probability and Information Theory with Applications to Radar (Pergamon Press, Oxford, England).
- Wozencraft, J.M., and I.M. Jacobs (1965), Principles of Communications Engineering (Wiley and Sons, Inc., New York, N.Y.).

- Zetterberg, L.H. (1962), Signal detection under noise interference in a game situation, IRE Trans. Information Theory IT-8, No. 5, 47-52 (Sept).
- Zhedzishskii, A.I., A.A. Kii, and V.P. Sokolov (1970), Statistical characteristics of envelope phase and their derivatives of the sum of a fading signal and narrowband normal noise, Radiotekh i Elektron 15, No. 7, 1406-1410 (July).
- Ziener, R.E., and R.B. Fluchel (1971), Selection of blanking and limiting levels for binary signaling in Gaussian plus impulse noise, Proc. IEEE Fall Electronics Conf., pp. 290-295.
- Ziener, R.E. (1967), Character error probabilities for M-ary signaling in impulsive noise environments, IEEE Trans. on Commun. Technol. COM-15, No. 1, 32-44 (Feb).
- Zuhrt, H. (1933), Die Beeinflussung Elektromagnetischer Wellen Durch Hochspannungsfreileitungen, Elektrische nachricht.-technik 10, No. 1, 25-38 (Jan.).
- Zyuko, A.G. (1963), Noise Stability and Effectiveness of Communications Systems, Gosudarstvennoye Izdatel'stvo Literatury, Po Voprosam Svyazi i Radio Moskva (Engl. transl. Dept of Commerce NTIS No. AD661892).

Section III

RADIO NOISE MEASUREMENT EQUIPMENT AND METHODS

- Aggers, C.V., D.E. Foster, and C.S. Young (1940), Instruments and methods of measuring radio noise, Trans. AIEE 59, 178-192 (Mar):
- Aggers, C.V., and W.E. Pakala (1933), Measuring radio interference from high voltage apparatus, Elec. J. 30, p. 504 (Dec.).
- Ahlbeck, W.H., W.Q. Crichlow, R.T. Disney, F.F. Fulton, Jr., and C.A. Samson (1958), Instruction book for ARN-2 radio noise recorder, Series Nos. 1 through 10, NBS Rept. 5545 (Jan.), Natl. Bur. of Standards, Dept. of Commerce, Boulder, Colo.
- Aiya, S.V.C. (1954), Measurement of atmospheric noise interference to broadcasting, J. Atmosph. Terr. Phys. 5, 230-242.
- Allred, C.M. (1962), A precision noise spectral density comparator, J. Res. NBS 66C, No. 4, 323-330.
- Ambrozy, A., G. Hides, and I.P. Valko (1963), A direct reading transistor noise figure measuring instrument, Electron. Engrg. 35, No. 427, 611-613 (Sept.).
- American Standards Assoc. (1957), American standard specification for radio noise and field strength meters, 0.015 to 30 Mc/s, C 63.2 - Nov., (Amer. Standards Assoc., New York, N.Y.).
- American Standards Assoc. (1957), American standard on methods of measurement of radio influence field (radio noise) 0.015 to 25 Mc/S: low voltage electric equipment, and non-electric equipment, C 63.4 - Nov. (Amer. Standards Assoc., New York, N.Y.).

- Arthur, M.G. (1969), A note on the precision measurement of impulse spectral intensity, NBS Memo. for the Record (Oct. 6).
- Arthur, M.G. (1969), Standards and measurement of impulse spectral intensity, NBS Rept. No. 9743.
- Arthur, M.G. (1967), High frequency noise as related to voltage measurements, NBS Rept. No. 9281.
- Babcock, L.F. (1963), The Army electromagnetic environmental test facility program, IEEE Trans. Radio Freq. Interference RFI-5, No. 2, 18-27.
- Barhydt, C. (1933), Radio noise meter, General Elec. Rev. 36, p. 201.
- Beer, H.F., W.J. Bray, and W.R.H. Lowry (1938), Wide range portable noise field and voltage measuring set, Gr. Brit. P.O. Engrg. Dept. Radio Rept. No. 376.
- Bell, A.H., and S.F. Pearce (1953), Radio interference from motor vehicles, Comparison of British and German measuring equipment, Tech. Rept. M/T 123, Brit. Elec. and Allied Industries Res. Assoc.
- Blanc-Lapierre, A. (1951), El factor de ruido, su medicion, Revista Electrotecnica 37, No. 1, 1-9 (Jan.).
- Brooks, J.L. (1965), Probe for conducted noise measurements, IEEE Trans. Electromag. Compatibility EMC-7, No. 2, 207-217.
- Brooks, J.L. (1965), An experimental current probe system for measuring conducted radio frequency interference from 20 kc to 80 mc, Tech. Rept. No. TR-405, Naval Civil Engrg. Lab., Port Huenime, Calif. (Oct.).
- Burrill, C.M. (1942), An evaluation of radio noise meter performance in terms of listening experience, Proc. IEEE 30, p. 473.
- Burrill, C.M. (1941), Progress in the development of instruments for measuring radio noise, Proc. IRE 29, 433-442.

- Caprio, S.J. (1968), Factors affecting measured value of impulse bandwidth, IEEE Trans. Electromag. Compatibility EMC-10, No. 4, 334-340 (Dec.).
- CCIR (1967), Study programme 21A/VI, Measurement of man-made radio noise, Documents of the XIth Plenary Assembly, Oslo, 1966, ITU, Geneva.
- CISPR (1961), Specification for CISPR radio interference measuring apparatus for the frequency range 0.15 Mc/s to 30 Mc/s, Comite Internatl. Special des Perturbations Radioelectriques, Publica. 2, Geneva.
- CISPR (1961), Specification for CISPR radio interference measuring apparatus for the frequency range 15 Mc/s to 300 Mc/s, Comite Internatl. Special des Perturbations Radioelectriques, Publica. 2, Geneva.
- CISPR (1962), Specification for CISPR radio interference measuring apparatus for the frequency range 25 Mc/s to 300 Mc/s, Comite Internatl. Special des Perturbations Radioelectriques, Publica. 2, Geneva.
- Coringella, P.C., and W.L. Eiseman (1961), System for low-frequency noise measurements, Rept. TM43-9, 12 pp, Naval Ord. Lab., Corona, Calif.
- Chappell, J.F. (1954), Instrumentation for interference and field strength measurement, Proc., Conf. for Radio Interference Reduction, Armour Res. Foundation, Chicago, Ill. (Dec).
- Cheek, R.C., and J. Moynihan (1951), A Study of Carrier Frequency Noise on Power Lines, Pt. I: Theoretical consideration and measuring techniques, AIEE Trans. Pt. 2, 70, No. 8, 1127-1133.
- Chislow, J.H. (1960), Mobile Telephone Systems, A method for measurement of the interference effect of impulse noise, E-1328 (5-51), Bell Telephone Labs., New York, N.Y. (Mar.).

- Clarke, C. (1960), Measurement of atmospheric noise structure, *Electronic Technol.* 37, 197-204.
- Curran, J.H. (1965), A new 10 GHz to 40 GHz RFI measuring instrument, *IEEE Electromag. Compatibility EMC-7*, No. 2, p. 233.
- Daniel, I.H., and G. Mole (1939), Apparatus for the measurement of interference at ultra-high frequencies, *J. IEE* 88, 41-49.
- Daywitt, W.C. (1969), Error analysis of a practical noise measuring system, NBS Rept. No. 9747.
- Dietzel, R. (1963), Anzeige Schwankungen bei der Effektivwertmessung von Bandpassrauschen, *Hochfreq-Tech u Elektroakust* 72, No. 5, 172-177 (Oct.).
- Dinger, H.E. (1962), Radio frequency interference measurements and standards, *Proc. IRE* 50, No. 5, 1312-1316 (May).
- Dinger, H.E., and H.G. Paine (1947), Factors affecting accuracy of radio noise meters, *Proc. IRE* 35, No. 1, 75-81.
- Dove, A.H. (1964), Performance measurements on the NM-52A, a field intensity meter, NBS Rept. 8456, Natl. Bur. of Standards, U.S. Dept. of Commerce, Boulder, Colo.
- Eckersley, A. (1950), Noise meter converter studies, Prog. Rept. 6, Contract AF28(099)-82, Moore School of Elec. Engrg., Univ. of Pennsylvania, Philadelphia, Pa. (Dec.).
- Eckersley, A. (1952), Noise meter calibrator studies, Rept. No. 2, Nov. 16, 1951 - Feb. 15, 1952, Feb. 29, 1952, Contract AF28(099)82, Moore School of Elec. Engrg. Univ. of Pennsylvania, Philadelphia, Pa.
- Eckersley, A., C.J. Fowler, and R.F. Schwartz (1951), Noise meter calibrator studies, Rept. No. 1, July 1 - Nov. 15, Dec. 1, 1951, Contract AF 28(099)82, Moore School of Elec. Engrg., Univ. of Pennsylvania, Philadelphia, Pa.

- Ekre, H. (1963), Polarity coincidence correlation detection of a weak noise source, IEEE Trans. Information Theory IT-9, No. 1, 18-23 (Jan.).
- Engelson, Morris (1962), Field intensity meter characteristics, Polarad Electronics Corp., Long Island, N.Y. Available through Electronic Industries Assoc., New York, N.Y. (Apr).
- Epstein, M., and R.B. Schulz (1959), Magnetic field pickup for low-frequency radio-interference measuring sets, Institute of Technology, Armour Res. Foundation, Chicago, Ill., Presented at IRE Natl. Convention March, 1959, New York, N.Y.
- Evans, J.E., D.K. William, J.K. Brown (1972), Description of the Lincoln Laboratory wideband ELF noise recording system, Tech. Note 1972-19, Lincoln Laboratory, MIT, Cambridge, Mass.
- Faris, J.J. (1967), Sensitivity of a correlation radiometer, J. Res. NBS 71C, No. 2, 153-170.
- Fastovskiy, I.A., and I.M. Furmanov (1959), Tipovyye pribory dlya izmereniya industrial'nykh radiopomekh (Standard instruments for measuring industrial radio interference), Leningrad, Sudpromgiz.
- Fournier, M. (1968), Performance of electrically small array receiving systems in presence of noise, IEEE Trans. Electromag. Compatibility EMC-10, No. 4, 347-354.
- Franz, K. (1942), Measurement of the sensitivity of receivers for short waves, Hochfrequenztech. u. Elektroakust. 59, 143-144.
- Frick, C.W. (1945), A study of wave shapes for radio-noise-meter calibrations, AIEE Trans. 64, 890-901.
- Fries, H.T. (1944), Noise figure of radio receivers, Proc. IRE 32, p. 419-422 (July).

- Fulton Forrest F., Jr. (1959), Design of single frequency filters, NBS Tech. Note No. 23, Natl. Bur. of Standards, U.S. Dept. of Commerce, Boulder, Colo. (Aug.).
- Geselowitz, D.B. (1961), Response of ideal radio noise meter to continuous sine wave, recurrent impulses, and random noise, IRE Trans. of Radio Freq. Interference RFI-3, 2-11 (May).
- Goffin, G., and G. Marchal (1938), The study and application of a stable radio interference voltage generator, Onde Elect. 17, 562-574.
- Goffin, G. (1939), A cause of variation in measurements of radio interference, Onde Elect. 18, 57-69.
- Goldberg, Jacob (1952), Problems in the measurement of radio noise interference, Tech. Rept. No. 4, Contract No. N0y-22272, Stanford Res. Inst., Stanford, Calif.
- Green, F.M. (1950), Influence of the ground on the calibration and use of VHF field-intensity meters, NBS Res. Paper RP 2062, 44, Natl. Bur. of Standards, U.S. Dept. of Commerce, Boulder, Colo. (Feb.).
- Greene, J.C., and J.F. Lyons (1959), Receivers with zero intermediate frequency, Proc. IRE 57, 335-336.
- Greenstein, L.J., T.R. Shaifer, and M. Epstein (1964), Magnetic field spectrum analyses, The Rev. of Scientific Instruments 35, No. 10, 1307-1310 (Oct.).
- Grosskopf, J., K.H. Kappelhoff, and G. Kopte (1956), New devices for determination of the statistical distribution of irregular electrical phenomena Nachrichtentechnische Zeit. 9, No. 1 (Jan.).
- Haber, F. (1967), Response of quasi-peak detector to periodic impulses with random amplitudes, IEEE Trans. Electromag. Compatibility EMC-9, No. 1, 1-6 (Mar.).
- Haber, F., and R.M. Showers (1961), Instrumentation for radio interference measurements, Electron. Industries 20, No. 3, 110-116.

- Hamburger, G.L. (1948), Interference measurement, Wireless Engr. 25, No. 293, 44-54 (Feb.).
- Hamburger, G.L. (1948), Interference measurement, Wireless Engr. 25, No. 294, 89-97 (Mar.).
- Handler, H. (1971), Hybrid circuit rms converter, IEEE Internatl. Solid-State Circuits Conf., Digest Tech. paNo. 15.5, University Park, Pennsylvania, J. Solid-State Circuits 14, 190-191 (Feb.).
- Harris, L.M., and J.K. Lynch (1956), CCIF psophometers and other instruments used for measuring noise and unwanted signals on telephone and broadcasting channels, Res. Lab. Rept. 3752, Engrg. Branch, Australia-Postmaster General's Dept.
- Hitchcock, R.D. (1963), Calculations for the calibration of Navy RIFI meters using a vertical rod antenna, TN 534, Naval Civil Engrg. Lab., Port Hueneme, Calif. (Sept 6).
- Horner, F. (1971), Techniques used for the measurement of atmospheric and man-made noise, In Progress in Radio Sci. 1966-1969, 2 (Lane et al., ed.), URSI, Brussels, Belgium.
- Horner, F. (1960), The design and use of instruments for counting local lightning flashes, Proc. IEE 107B, 321-330.
- Houlding, N., and N.J. Smith (1951), Mercury vapour discharge lamps: A source of power at centimetric wavelengths suitable for noise factor measurements, Telecomm. Res. Establishment (Gt. Britain) Tech. Note No. 111.
- Hydro-Quebec (1968), Correlation of various RI meters and reading comparison of RI meter operators on 735 kV line, Hydro-Quebec Working Group No. 1, Radio-Interference Subcommittee, IEEE Trans. on Power Apparatus Systems PAS-87, No. 5, 1249-1259 (May).

- IEEE (1965), Standard for measurement of radio noise generated by motor vehicles and affecting mobile communications receivers in the frequency range 25 to 1000 megacycles per second, Reprint No. 263, IEEE, New York, N.Y. (Nov.).
- Japan (1956), Standards of measuring apparatus for noise interference, Annual Rept. by Technical Commission for Radio Noise, p. 257, Japan.
- Jarva, William (1955), Problems of radio interference measurements, Tech. Note NADC-EL-N54149, Naval Air Dev. Center (Feb. 11).
- deJong, A. (1968), Methods for measuring radio interference in the frequency range above 30 MHz, Ingenieur (Netherlands) 80, No. 46, p.(et)161-(et)5 (Nov. 15), (in Dutch).
- Kawakami, K., and H. Akima (1955), On time constants of linear detectors used in radio noise measurements, J. Radio Res. Labs. (Japan) 2, No.9, 221-234 (July).
- Lampard, D.G. (1954), Minimum detectable change in mean noise input power to radio receiver, Proc. IEE 101, Pt. 4, No. 6, 118-128 (Feb.).
- Lenovoi, V.N., and A.V. Men (1963), Tunable standard noise generator, Instruments & Experimental Techniques (USSR) No. 6, 1159-1164 (July).
- Lee, W.C.Y. (1967), Energy-density antenna for independent measurement of electric and magnetic field, Bell Sys. Tech. J. 46, No. 7, 1587-1599 (Sept.).
- Levine, M.W., and F.E. Parise (1958), VHF-UHF receiver front ends, General Electron. Labs. Rept., Contract DA36-039 SC-64457, General Electronics Labs., Inc. (July 1954-Mar. 1958).
- Lorch, J. (1961), Instrumentation and test procedures, presented at Soc. Automotive Engrs. Meeting, Detroit, Mich. (Mar.).

- Magrab, E.B., and D.S. Plomquist (1971), The Measurement of Time-Varying Phenomena (Wiley and Sons, Inc., New York, N.Y.).
- Matheson, Robert J. (1966), Square law detector has 40 dB dynamic range, Electron. Designers Handbook, pp. 95-97 (Sept. 5).
- Matheson, R.J. (1969), Dynamic range problems encountered in RFI/EMI measurements, IEEE Internatl. Conf. on Communication Record V, Paper No. 3215.
- Matheson, Robert J. (1970), Instrumentation problems encountered making man-made electromagnetic noise measurements for predicting communication system performance, IEEE Trans. Electromag. Compatibility EMC-12, No. 4, 151-158.
- Matheson, Robert J. (1971), High impedance driver boosts detectors' dynamic range, Electron. Magazine (Designer's Casebook Section) 44, No. 22, 79 (Oct. 25).
- Matheson, R.J. (1971), Wide dynamic range correlator, Telecomm. Tech. Memo Ot-TM-45, U.S. Dept. of Commerce, Boulder, Colo. (June).
- McKay, H.D., and K.W. Bach (1971), Basic electromagnetic interference measurements on automobiles, Soc. Automotive Engrs. Paper 710027 (Jan. 11-15).
- Miller, C.K.S., W.C. Daywitt, and M.G. Arthur (1967), Noise standards, measurements, and receiver noise definitions, Proc. IEEE 55, No. 6, 865-877.
- Mills, A.H. (1970), Instrumentation system for measurement of noise characteristics, IEEE Reg. Electromag. Compatibility Symp. Record II, San Antonio, Texas, Oct. 6-8, Session II-B, 5 pp.

- Mortenson, Kenneth E., and Gerard Hasserddji (1953), An investigation of problems associated with broadband interference measurements, Quart. and Final Rept., Contract DA36-039 SC-42488, Rensselaer Polytech. Inst., Troy, N.Y.
- Muller-Hillebrand, D. (1959), Lightning counter and results obtained in Sweden during the thunderstorm period 1958, J. Sci. Tech. Res. Stockholm) 30, 217-233.
- Mutch, W.W. (1932), A note on an automatic field strength and static recorder, Proc. IRE 20, 1914-1919.
- Nail, J.J. (1953), Designing discone antennas, Electron. 26, 167-169 (Aug.).
- Neubaur, J.R. (1966), Vehicular interference radiation measurement technique, IEEE Trans. Vehicular Communica. VC-15, No. 2, 57-65 (Oct.).
- Newman, D.B. (1967), Principles of antenna design, J. Electro-Technol. 80, No. 3, pp. 53, 55-56 (Sept.).
- Pavlov, V.V. (1962), Measuring and control semiconductor installations in nuclear power plants, Moscow, Gosotomizdat (with chap. on measuring devices).
- Peebles, K.A., and R.M. Showers (1967), Technique for measuring effective RFI radiated from electrical and electronic equipment, IEEE Electromag. Compatibility Symp. Record, 189-194 (July 18-20).
- Peterson, H.O. (1935), A method of measuring noise levels on short-wave radiotelegraph circuits, Proc. IRE 23, 129-134.
- Pressey, B.G., and G.E. Ashwell (1946), A pulse field strength measuring set for VHF, J. IEE, Pt. IIIA 93, p. 1359.
- Radio Mfgs. Assoc. (1940), Methods of measuring radio noise, Rept. of Jt. Coord. Cmte. on Radio Reception of EEI, NEMA, and RMA, EEI Publica. No. 69, NEMA 107, RMA Engrg. Bull. No. 32, Edison Elec. Inst., New York, N.Y.

- Reed, H.H. (1967), Noise curves for high gain antennas, *Microwaves* 6, No. 4, 46-49 (Apr.).
- Renaudin, D. (1953), Measurement of radio frequency caused by high voltage lines, *Bull. Soc. Franc. Electriciens* 3, No. 31, 425-431 (July 3).
- Roberts, G. (1971), Measurements of, with, and in the presence of noise, *Electronic Measurements and Instrumentation*, B.M. Oliver and J.M. Cage, ed. (McGraw-Hill Book Co., Inc., New York, N.Y.); pp, 65-105.
- Sabaroff, S. (undated), Impulse spectrum analysis for calibration of impulse noise generators, undated, Lynmar Engineers, Inc., 1432 N. Carlisle St., Philadelphia, Pa.
- Schulz, Richard B. (1951), Studies, investigations, and applied research concerning radio interference instrumentation, development of pick-up devices, and evaluation of electro-medical equipments, Interim Rept. No. 2, Contract NObsr-52386, July 1-31, Aug. 2, Electro-Search, Philadelphia, Pa.
- Seybold, A.M. (1950), The low frequency disccone, *CQ, The Radio Amateur's J.* (July).
- Soc. of Automotive Engrs. (1958), SAE Standard for measurement of vehicle radio interference (30-400 Mc), SAE, J551, Soc. of Automotive Engrs (Jan).
- Stoker, Warren C., H.F. Hicks, Jr., A.L. deGrafferred, H.A. Haus, K.E. Mortensen, T.P. Puine, S.K. Slawsky (1952), An investigation of electromagnetic coupling devices for the measurement of noise fields, Rensselaer Polytech. Inst. Rept. No. 7, Troy, N.Y. (May 30).
- Strafford, F.R.W. (1937), Square law rectification of electrical noise, *Wireless Engr.* 14, No. 164, 242-245 (May).

- Stumpers, F.L.H.M., F. Mochring, A. de Jong, A.C. Fortgens, H.M.J. Bucx, W.J.L. Dalnijn, and J.W.A. van der Scheer (1968), Radiostoringen, Ingenieur 80, No. 42, pp (et)147-159 (Oct.).
- Stumpers, F.L.H.M., F. Mochring, A. de Jong, A.C. Fortgens, H.M.J. Bucx, W.C.L. Dalnijn, and J.W.A. van der Scheer (1968), Radiostoringen, Ingenieur 80, No. 46, pp. (et)161-174 (Nov.).
- Stumpers, F.L., F. Mochring, A. de Jong, A.C. Fortgens, H.M.J. Bucx, W.J.L. Dalnijn, and J.W.A. van der Scheer (1968), Radiostoringen, Ingenieur 80, No. 50, pp. (et)177-183 (Dec.).
- System Dev. Corp. (1968), Decision information distribution system: Intelligibility study report, Santa Monica, Calif.
- Taggart, H.E., and J.L. Workman (1967), Calibration principles and procedures for field intensity meters (10kHz to 1GHz), NBS TR 67-73 RADC, July 1966, Natl. Bur. of Standards, U.S. Dept. of Commerce, Boulder, Colo. (Jan.).
- Tech. Comm. for Radio (Japan)(1956), Standards of measuring apparatus for noise interference, Annual rept. by Tech. Commission for Radio Noise, p. 257.
- Thomas, H.A. (1950), A subjective method of measuring radio noise, Proc. IEE 97, Pt. III, 329-334.
- Trebby, F.J. (1959), Development of square-law radio noise meter, AIEE Trans. Power App. Systems PAS-78, Pt. 3, No. 43, 522-527.
- Uno, M. (1971), Impulse-peak measurement by means of pulse lengthener circuit with source follower, IEEE Trans. Instrumenta. & Measurements IM-20, No. 3, 143-146.

- Wait, D.F. (1967), The sensitivity of the Dicke radiometer, J. Res. NBS 71C, No. 2, 127-152.
- Wallace, Volney (1971), Success story - riddance of power-line noise, QST 55, No. 5, p.47 (May).
- White, G.M. (1957), An experimental system for studying the zeros of noise, NR-372-012, Cruft Laboratory, Harvard Univ., Cambridge, Mass.
- Yang, E.S. (1969), Probability density analyzer, IEEE Trans. Instrumenta. & Measurements IM-18, No. 1, 15-18 (Mar).
- Yuhara, H., T. Ishida, and M. Higashimura (1956), Measurement of the amplitude-probability distribution of atmospheric noise, J. Radio Res. Labs (Japan) 3, 101-108.

Section IV
MAN-MADE RADIO NOISE - GENERAL

- Aggers, C.V. (1937), Eliminating radio interference, Elec. J. 34, No. 8, 331-334 (Aug.).
- AIEE (1945), Grounding principles and practice, Special Reprint 7, Jan. issue.
- AIEE (1945), Electrical engineering, originally presented as a series of lectures conducted by the Power and Industrial Group of the New York section of AIEE, Special Reprint 7, May issue.
- Allen, E.W., and H. Garlan (1960), FCC controls man-made RFI, Electron. Ind. 19, No. 10, 86-92 (Oct.).
- Alvarez, F.B. (1957), Radio interference suppression system for electric motor driven tool utilized by the Dept. of the Army, Rept. TM-M-1873, Signal Corp. Engrg. Labs. (April).
- Ankenbrondt, F.L. (1962), The cost of radio frequency interference, Panel: Electromag. Compatibility - Its significance to our survival, IRE Internatl. Conv. Record, Session 29, PGRFI March 28, pp. 226-227.
- Armour Res. Foundation (1941), Investigation of short wave diathermy apparatus, Armour Res. Foundation, Illinois Inst. of Technol., Chicago, Ill.
- Armour Res. Foundation (1956), Proc. of the Second Conf. on Radio Interference Reduction, Armour Res. Foundation, Illinois Inst. of Technol., Chicago, Ill. (Mar.).
- Armour Res. Foundation (1957), Proc. of the Third Conf. on Radio Interference Reduction, Armour Res. Foundation, Illinois Inst. of Technol., Chicago, Ill (Feb.).
- Avery, L.R. (1963), The proper role of the interference control plan, IEEE Trans. Radio Freq. Interference RFI-5, No. 2, 14-17 (June).

- Bayley, A.E., L.M. Sarlo, and E.L. Frost (1956), Amplitude distribution of receiver noise after detection and filtering - experimental investigation, AD 107683, NTIS, Dept. of Commerce.
- Baghdady, E.J. (1963), Noise threshold reduction with the oscillating limiter, Proc. IEEE 51, No. 3, 493-495 (Mar.).
- Bassard, B., L. Becker, R. Ernst, P. Torrione, and C. Renton (1963), Interference reduction techniques, Quart. Prog. Rept. No. 1, CR 63-419-9, RCA Defense Electronics Products, New York, N.Y. (Sept).
- Bauer, Frederick (1965), Report on meeting of Working Group 4 (Ignition Interference), Internatl. Spec. Cmte. on Radio Interference (CISPR), April 26-29, Paris, France.
- Bauer, F. (1967), Vehicular radio frequency interference - accomplishment and challenge, IEEE Trans. Vehicular Technol. VT-16, No. 1, 58-68 (Oct.).
- Bennett, E., and G. Fredendall (1935), Control of potential over insulator surfaces: to reduce radio interference caused by corona from pin insulators, Electron. Engr. 54, p. 1084 (Oct.).
- Bennett, W.R. (1956), Methods of solving noise problems, Proc. IRE 44, No. 5, 609-638 (May).
- Billick, P. (1969), Toward an optimum receiver, IEEE Electromag. Compatibility Symp. Record, pp. 203-206 (June).
- Blakely, C.E., R.N. Bailey, H.H. Jenkins, W.M. Rogers, E.M. Wood, and R.F. Ficchi (1962), Bibliography on RFI, IRE Trans. Radio Freq. Interference RFI-4, No. 1, 1-211 (Feb.).
- Borquist, W., and A. Vrenthem (1948), Internatl. Conf. on Large High-voltage Electric Systems, Appendices by B. Henning, S. Skagerlind, and S. Bylund, June 24-July 3, Paris, France.

- Briggs, D.W., and J.V. Clore (1971), The suppression of electromagnetic radiation from motor vehicles, Automotive Engr. Congress, Paper No. 710030, Detroit, Mich. (Jan.).
- British Standards Inst. (1939), Limits of radio interference, BSS No. 800, British Standards Institution, London.
- Buck, R.E., L.A. Frasco, H.D. Goldfein, S. Karp, L. Klein, E.T. Leonard, J. Liu, P. Yoh (1971), Ground vehicle communications and control, Annual Rept. 1, DOT-TSC-UMTA-71-6, U.S. Dept. of Transportation, Transportation Systems Center, Cambridge Mass.
- Buehler, W.E. (1968), Interdisciplinary application of radio noise phenomena, IEEE Internatl. Convention, New York, N.Y., 18-21 Mar (New York: IEEE) p. 42.
- Canadian Dept. of Transport.(1963), List of circulars and bulletins: Suppression of inductive interference, Cir. SII-16-1, Air Services Telecomm. & Electron. Br., Dept. of Transport, Ottawa, Canada (Sept. 9, rev.).
- Canadian Dept. of Transport (1963), The control of radio interference from industrial, scientific, and medical equipment, Cir. SII-13-29, Air Services Telecomm. and Electron. Br., Dept. of Transport, Ottawa, Canada (rev. May 1, 1962), (Dec.).
- Canadian Standards Assoc. (1949), Tolerable limits of radio interference from radio frequency generators - industrial, scientific and medical, Can. Elec. Code IV: Radio, Can. Standards Assoc. C22.4, No. 106, 10 pp.
- Carroll, John M. (1964), The quest for compatibility, Electron. 37, No. 16, 79-84 (May 18).
- CCIR (1936), Report submitted by USA proposed for the study of question 9, Mimeograph No. 16941, 17054 (May).
- Chappell, J.F. (1960), Introduction to panel discussion on modif radio vehicular interference, IRE Trans. Vehicular Commun. VC-9, No. 1, 91-94 (May).

- CISPR (1965), Recommendation No. 18/1: Interference from ignition systems, Internatl. Electrotech. Commission, Comite Internatl. Spec. des Perturbations Radioelectriques (Secretariat), (Internatl. Spec. Cmte. on Radio Interference), (Jan).
- CISPR (1966), Recommendations of CISPR, Publica. No. 7, Internatl. Electrotech. Commission, Internatl Spec. Cmte. on Radio Interference, Comite Internatl. Spec. des Perturbations Radioelectriques.
- CISPR (1966), CISPR Reports and Study Questions, CISPR Publica. No. 8, Internatl. Electrotech. Comm., Internatl. Spec. Cmte. on Radio Interference, Comite Internatl. Spec. des Perturbations Radioelectriques.
- CISPR (1966), CISPR limits of radio interference and report of national limits, CISPR Publica. No. 9, Internatl. Electrotech. Comm., Internatl. Spec. Cmte. on Radio Interference, Comite Internatl. Spec. des Perturbations Radioelectriques.
- Clark, D.B., and Robert D. Hitchcock (1960), Contiguous wrapping of transmission line conductors with high megavolt tape for large radio interference attenuation, Tech. Rept. 062, U.S. Naval Civil Engrg. Lab., Ft. Huenome, Calif. (Mar).
- Cohn, S.I. (1962), Technical progress at analysis center, Proc. Electromag. Compatibility EMC-8, 31-43 (Oct.).
- Commerce, U.S. Dept. of (1956), Practical handbook for location and prevention of radio interference from overhead power lines, Office of Tech. Services, PB 131017, U.S. Dept. of Commerce, Boulder, Colo. (Nov. 21).
- Corbett, L.J. (1925), Radio interference problem and the power company, J. AIEE Oct. 1925, p. 1057; discussion p. 1348, Dec. 1925.
- Crichlow, W.Q. (1957), Noise investigation at VLF by the National Bureau of Standards, Proc. IRE 45, pp. 778-782.

- Dean, W., Jr. (1971), Electromagnetic spectrum control programs, IEEE Trans. Aerospace & Electronic Systems AES-7, No. 1, 23-26 (Jan.).
- Dennhardt, A. (1936), Ueber die Technische Normung der fuer die Hundefunkbeeinflussig Massgebenden Groessen, Elektriz. 35, No. 15, 393-396 (May 25).
- Dilworth, R.A. (1958), Radio interference, Pt. III: Suppression, J. Elec. Engrs. Post Office 51 (London).
- Disney, Robert T. (1971), Electromagnetic interference environment, measurement and prediction considerations, Telecomm. Tech. Memo. OT/ITSTM-28, U.S. Dept. of Commerce, Boulder, Colo. (Feb.).
- Doty, A.C. (1966), Progress toward a uniform standard for vehicular radiation, Presentation to the 17th annual IEEE-PGVC Conference, Dec. 1, Montreal, Quebec.
- Egidi, C., and E. Nano (1968), Work on radio interference measurement and suppression at IEN, Turin, Ital , IEEE Electromag. Compatibility Record 10, 232-235, July 23-25.
- Electric (1954), Television interference problems, Electric Light & Power 32, No. 2, 74-77.
- Electrical Mfg.Assoc. (1954), How to suppress radio interference, Electrical Mfg. Assoc. (Sept.), 110-128, New York, N.Y.
- Elektrotech. Zeit. (1940), Regeln fuer die Hochfrequenzentstoerung von Elektrischen Maschinen und Geraeten fuer Nennleistungen Bis 500 W., Elektrotech. Zeit. 61, No. 52, 1201-1202 (Dec.).
- FCC (1956), Offset frequencies for tv emission, Pt. III: Multiple co-channel interference, FCC Lab. Div. Rept. on Proj. 222,926, Federal Communica. Comm. (Dec. 13).
- Fink, Donald G. (1962), Basic issues of spectrum conservation, Panel: Electromagnetic Compatibility: Its significance to our survival, IRE Internatl. Convention Record, Pt. 5, Session 29, PGRFI, March 28, pp. 221-222.

- Firestone, William L. (1965), A review of communication interference problems, IEEE Trans. Vehicular Communica. VC-14, No. 1, 57-66 (Mar.).
- Fischer, W.H. (1966), The radio noise spectrum from ELF to EHF, J. Atmos. Terrest. Phys. (GB) 28, No. 4, 429-430 (Apr).
- Freeman, J.J. (1952), On the relation between the conductance and the noise power spectrum of certain electronic streams, NBS Rept. 1871, Natl. Bur. of Standards, U.S. Dept. of Commerce, Washington, D.C.
- Freeman, J.J. (1958), Principles of Noise (John Wiley and Sons, Inc., New York, N.Y.).
- German, J.P. (1971), A study and forecast of the electromagnetic spectrum technology, Pt. II, Texas A&M Research Foundation, College Station, Texas.
- Gifford, R.P. (1962), Spectrum pollution, IRE Internatl. Convention Record, Pt. 5, Session 29, PGRFI, Mar. 28, 223-225.
- Gilchrest, G.J. (1934), Radio influence insulator characteristics 53, p. 899.
- Glenn, Alvin B. (1952), Study of noise reduction by feedback in UHF amplifiers, ASTIA-OSC, 212pp.
- Goldblum, R.D. (1967), Need for organized approach to EMI (Electromagnetic Interference) control, IEEE Trans. Engrg. Mgmt. EM-14, No. 3, 149-152 (Sept.).
- Greene, F.L. (1954), Solutions to TVI problems, Electric Light and Power 32, No. 2, 74-77 (Feb.).
- Hagn, G.H., M.G. Keenan, and H.A. Turner (1965), Pit shielding for communication satellite ground-terminal antennas, IEEE Electromag. Compatibility EMC-7, No. 2, 93-103.
- Hale, A.P. (1956), Electrical Interference (Heywood & Co., Ltd., London).

- Henry, V.F., and J.J. Kelleher (1968), Radio frequency interference experiment design for the applications technology satellite, IEEE EASCON 1968 Record, pp. 514-520; see also NASA-TN-D-5041, May 1969-same title and authors.
- Hinchman Corp. Engrs. (1957), Report and criteria of methods of measurement and recommended allowable limits of electro-magnetic interference voltage from high transmission lines, Phases I, II, III, NOY-88454, U.S. Navy Yards and Docks, Washington, D.C. (Oct. 25).
- IEE (1936), Electrical interference with broadcasting, J. IEE 79, No. 206, p. 211 (Aug); same cond. Electrician 117, p. 109 (July 24); excerpts Engineer 162, p. 89 (July 24); abstract Elec. Rev. (London) 119, p. 117 (July 24).
- IEEE (1964), A proposed IEEE standard on radio interference, IEEE Trans. on Power Apparatus Systems PAS-27, PAS-1 (Sept).
- IEEE (JTAC) (1964), Radio spectrum utilization, A report of Jt. Tech. Adv. Cmte. of IEEE Industries Assoc.
- IEEE (1966), Measurement of radio noise generated by motor vehicles and affecting mobile communications receivers in the frequency range 25-1000 Mc/s, IEEE Trans. Vehicular Commun. VC-15, No. 2, 66-68 (Oct.).
- IEEE (JTAC) (1968), Man-made radio noise, Report of Jt. Tech. Adv. Cmte. Subcmte. 63.1.3 (unintended radiation), Suppl. 9, Spectrum Engineering, the Key to Progress, IEEE JTAC publica. (Mar).
- Jacobs, George (1962), Radio interference - suicide or challenge, Proc. IRE, p. 21 (May).
- Jancke, G., B. Holmgren, G.A. Petterson, and P. Akerlind (1954), Protective measures against telephone and radio interference from high-tension lines, Rept. No. 338, Internatl. Conf. on Large Electric Systems III.

- Jones, F.L. (1953), Electrical discharges, Rep. Prog. Phys. 16, 216-265.
- Jones, J.J. (1963), Hard-limiting of two signals in random noise, IEEE Trans. Information Theory IT-9, No. 1, 34-42 (Jan).
- Kent, P.J. (1949), Automotive industry's participation in reduction of radio and television interference, Soc. Automotive Engrs. J. 57, No. 8, 17-19 (Mar.).
- Kent, P.J. (1949), Television brings changes in car ignition behavior, Soc. Automotive Engrs. J. 57, No. 8, (Mar).
- Kent, P.J. (1951), Report of electrical equipment subcommittee on vehicle radio interference (Jan.).
- Khalifa, M.M., and R.M. Morris (1967), A laboratory study of the effects of wind on DC corona, IEEE Trans. Power Apparatus Systems PAS-86, No. 3, 290-296 (Mar.).
- Kinase, A., and T. Kanai (1962), On VHF radio wave propagation, NHK Tech. J. (Japan Broadcasting Corp.) Monthly Rept. p. 14 (Aug.).
- Klingman, G.W. (1949), Reduction of interference from radio frequency heating equipment, AIEE Trans. 68, Pt. 1, 718-724.
- Landon, V.D., and J.D. Reid (1939), A new antenna system for noise reduction, Proc. IRE 27, p. 188.
- Liu, J., and P. Yoh (1971), Survey of multipath and noise measurements in cities, IEEE-ICC-71, June 14-16, Montreal, Canada (June).
- McCandless, J. (1932), Radio interference: Its causes and elimination, Electricien 109, p. 198 (Aug. 12).
- McDavid, J.A. (1962), System electromagnetic compatibility: DoD's approach to the problem, Panel: Electromag. Compatibility, Its significance to our survival, IRE Internatl. Convention Record, Pt. 5, Session 29, PGRFI, 228-232, Mar. 28.

- Marshall, C.W. (1954), Report of the work of Study Committee No. 11, Telephone and radio interferences, Rept. No. 342, Internatl. Conf. on Large Electric Systems III.
- Merriman, H.O., and F.G. Nixon (1939), Radio interference - investigation, suppression and control, Proc. IRE 27, p. 16 (Jan.).
- Merriman, H.O. (1945), Radio interference from electrical apparatus and systems, Telecomm. Div., Air Services Branch, Dept. of Transport., Ottawa, Canada.
- Merriman, H.O., and F.G. Nixon (1939), Radio interference - investigation, suppression and control, Proc. Inst. Radio Engrs. 27, p. 16 (Jan.).
- Mestel, H.K. (1969), Evaluation of EMC programs, IEEE Electromag. Compatibility Symp. Record.
- Miller, C.K.S. (1968), Notes for high-frequency and microwave noise seminar held in March, NBS BL-1-31-8-2, Nat. Bur. of Standards. Boulder. Colo.
- Navy Bureau of Ships (1952), Interference measurement, radio methods and limits 14 kilocycles to 1000 megacycles MIL-1-16910A (Ships), Bur. of Ships Specifications (Jan).
- NELA Bull.(1924), Investigation of power circuit interference in radio, N.E.L.A. Bull. 11, 511-513.
- NELA (1931), Progress Report on radio interference from high-voltage transmission lines -- pin and pedestal type insulators, Natl. Elec. Light Assoc., Foreign Systems Coordina. Comm.
- NEMA (1953), Recommended installation and test procedures for high frequency stabilized arc welders, Jt. Industry Cmte. on HF Stabilized Arc Welders, Natl. Electrical Mfr's. Assoc (NEMA), (June)
- NESC (1970), Naval Shore Electronics Criteria, NAVEXLEX 0101, 102, Dept. of Navy, Naval Electron. Systems Command, Washington, D.C. (June).

- Navy, Bur. Yds. and Docks (1958), Report and criteria of method of measurement and recommended allowable limits of electromagnetic interfering voltages from high voltage transmission lines of the 132 kV class, Phases I, II, III, NBY-17792, U.S. Navy Bureau of Yards and Docks, Washington 25, D.C. (Sept. 22).
- Neale, J. (1935), Broadcast interference: Post Office investigations: Method of suppression at the source and at the receivers' premises, *Electrician* 114, pp. 151, 179, 181 (Feb. 1-8); *Elec. Rev. (London)* 116, p. 161 (Feb. 1).
- Newman, M.M., and J.R. Stahmann (1952), Investigation of radio receiver noise reducing circuitry, Interim Rept. No. 6, L&T Rept. No. 221, Contract AF 18(600)74, Lightning and Transients Res. Inst., 21 pp. (July), Tech. Information Div., Library of Congress, Washington, D.C.
- Nichols, F.J. (1963), RFI/EMI at the crossroads, 9th Tri-Service on EMC, pp. 45-48.
- Pierce, J.R. (1956), Physical sources of noise, *Proc. IRE* 44, No. 5, 601-608 (May).
- Pakala, W.E. (1964), A practical handbook for location and prevention of radio interference from overhead power lines, West. Res. Rept. No. 64-9E4-565-ki, Westinghouse Res. Lab., East Pittsburgh, Pa. 55 pp (Mar).
- Quillico, G. (1956), On the equivalent diameter and the surface electric gradient, Internatl. Conf. on Large Electric Systems, Rept. No. 214, Vol. III.
- Radio Mfgs. Assoc. (1936), Radio Manufacturers' Association and Society of Automotive Engineers study noise, *Electronics* 9, p. 41 (May).
- Radio Tech. Planning Board (1944), Committee 2 on carrier frequency capabilities of Panel 1 of the Radio Tech. Planning Board, Final Rept. of Committee (Aug. 6).

- Roehmann, L.F. (1938), References on radio interference, *Electronics* 11, p. 32 (Oct.).
- Rowe, F.D. (1954), How to locate and eliminate radio and TV interference (John F. Rider Publica., New York, N.Y.).
- REA (1950), Location of radio interference on rural power power systems, Tech. Standards Div., Rural Electrifica. Admin., U.S. Dept. of Agriculture, Washington, D.C. (Mar.).
- Sanford, and W. Weise (1937), Review of radio interference investigation, *Elec. Engrg.* 56, No. 10, 1248-1252 (Oct.).
- Satoh, Y. (1932), AC corona disturbances about conductor, *IEE* 52 (Japan), No. 523, p. 104 (Feb.).
- Saum, G.H., and W.H. Fischer (1965), Measurements of noise emission from mercury balls, *Nature* 205, No. 4971, 558-571 (Feb. 6).
- Schulz, W.A. (1937), Can radio noise from loose hardware be eliminated, *Elec. Light & Power* 15, No. 10, 59-60, Public Svc. Company of Indiana (Oct.).
- Sclater, Neil (1967), Systems solution to EMI problem sought, *Electron. Design* 17, 17-22 (Aug. 16).
- Senn, J.C. (1956), Reduction of power-line radio interference, *Proc. Second Annual Conf. on Radio Interference Reduction*, Chicago, Ill., 24 pp (Mar.).
- Shchukin, A.N. (1955), On a method of combating impulses interference in radio reception, *Ann. USSR Phys. Ser.* 19 (transl. by P.E. Green and W. Dolye).
- Shepherd, N.H. (1964), IEEE Standards to advance receiver interference prediction, *Proc. 10th Tri-Service Conf. on EMC*, 826-847 (Nov.).
- Shepard, N. (1971), Analysis of NAOME data, *Automotive Mfgs. Assoc., Inc., Detroit, Mich.* (Sept.).

- Short, Brooks H. (1955), Meeting of the SAE Instrument Evaluation Subcommittee of the SAE Radio Interference Subcommittee of the SAE Electrical Equipment Committee, May 2-6, 23 and 24, Delco-Remy Div., General Motors Corp., Anderson, Ind.
- Smith, M. (1956), Radio and television interference, Brit. Inst. Radio Engrs. J. 16, No. 8, 444-449 (Aug.).
- Smithgall, H.M., Jr. (1969), A technique of identification and correction of electromagnetic interference in airborne telemetry aircraft, Freq. Technol. 7, No. 6, 19-24 (June).
- Spence, R.E. (1969), FCC tightens control over interfering RF devices, IEEE, ICC Conf. Record, Boulder, Colo., Session 13, pp. 13-16, June 9-11.
- de Stadelhofen, J.M. (1963), La surveillance du deparasitage obligatoire des vehicules a moteur, Technische Mitt. PTT 41, No. 3, 74-84.
- STAC (1965), A challenge in natural resource utilization reg., Standard Telephone & Cables, Ltd. rept. to DTM, Special Tech. Advisory Committee (Mar. 26).
- Stumpers, F.L.H.M. (1970), Progress in the work of CISPR, IEEE Trans. Electromag. Compatibility EMC-12, No. 2, 29-32 (May).
- Stumpers, F.L.H.M. (1971), Interference to communication systems and the work of CISPR, Internatl. Conf. on Communica. 71C28-COM 37, pp 14-19, Montreal (June).
- Sylvania Electron. (1963), Design review report for Proj. 124-221, Sept. Contained in report on hole puncher performance investigation of radio subsystems of Minute-man Ground Electronics System, Sylvania Electronics, Waltham, Mass.
- Telecomm. Sci. Panel (1966), Electromagnetic spectrum utilization: The silent crisis, Rept. by the Telecommunica. Science Panel, Commerce Tech. Advisory Board, U.S. Dept. of Commerce (Oct.).

- Teplov, N.L. (1957), Evaluation of noise-suppression methods in radio reception based on averaging of the function of signal and noise, Radio tek. 12, No. 9, 3-11 (in Russian).
- Thompson, W.I.III (1971), Bibliography on ground vehical communications and control: A KWIC independent, Annual Rept., U.S. Dept. of Transportation, Cambridge, Mass. Vol. II, DOT-TSC-UMTA-71-3 (July).
- Tooke, A.E., and H.F. Church (1934), Classified bibliography of man-made radio interference and associated measurements, ERA (British Electrical and Allied Industries Res. Association) Rept. M/22, ERA, 15 Savoy St., London.
- Twombly, J.C. (1955), Interaction of electrons and RF fields, current stratas of the noise analysis, ASTIA-OSC (Dec 1954-July 1955).
- Veggeberg, J.M. (1958), Vehicular communications in the City of Chicago Government, Paper presented at IRE Chicago Section, Dec. 12.
- Vogel, Sy (1963), RFI, causes, effects, cures, Electronics 36, No. 25, 37-60 (June 21).
- Waibel, E. (1963), Method to eliminate noise during the transmission of radio pulses, Rev. Sci. Instr. 34, No. 1, 31-33 (Jan.).
- Warner, R.S., and W.P. Barrett (1956), Interference suppression capacitor goes to "L", Proc. Second Conf. on Radio Interference Reduction, Armour Res. Foundation, Ill. Inst. of Technol., Chicago, Ill. (Mar.).
- Weinstock, G.L. (1965), Electromagnetic interference control within aerospace ground equipment for the McDonnell Phantom II aircraft, IEEE Electromag. Compatibility EMC-7, No. 2, p. 85 (June.).
- Westinghouse (1964), A practical handbook for location and prevention of radio interference from overhead power lines, Westinghouse Res. Rept. 611-984-565 ki, Westinghouse Res. Lab., East Pittsburgh, Pa.

Section V.

ATMOSPHERIC RADIO NOISE

General Considerations Related to Man-made Radio Noise

- Aarons, J. (1956), Low frequency electromagnetic radiation 10-900 cycles per second, J. Geophys. Res. 61, 647-661.
- Abraham, L.G., Jr. (1965), Aspects of the terrestrial ELF noise spectrum when near the source or its antipode, Radio Sci. J. Res. NBS 69D, No. 7, 977-988.
- Aiya, S.V.C. (1955), Noise power radiated by tropical thunderstorms, Proc. Inst. Radio Engrs. 43, 966-974.
- Aiya, S.V.C. (1958), Atmospheric noise interference to shortwave broadcasting, Proc. IRE 46, 580-589.
- Aiya, S.V.C. (1959), Measurement and description of the characteristics of atmospheric radio noise, J. Sci. Industr. Res. (India) 18B, 43-47.
- Aiya, S.V.C. (1962), Structure of atmospheric radio noise, J. Sci. Industr. Res. (India) 21D, 203-220.
- Aleksandrov, M.S. (1972), Fluctuations of the Electromagnetic Field of the Earth in the Super-Low Frequency Range, "Nauka," Moscow.
- Al'pert, Ya. L., and S.V. Borodina (1956), Investigation of the propagation of long and very long radio waves by the analysis of atmospheric waveforms, Radiotekhnika i Elektronika 1, 293-308.
- Balser, M., and C.A. Wagner (1960), Measurements of the spectrum of radio noise from 50 to 100 cycles per second, J. Res. NBS 64D (Radio Prop.), No. 4, 415-418.
- Barlow, J.S., G.W. Frey, Jr., and J.B. Newman (1954), Very low frequency noise power from the lightning discharge, J. Franklin Inst. 27, 145-163.
- Bolton, E.C. (1971), Simulating atmospheric radio noise from low frequency through high frequency, Rev. Scientific Instruments 42, No. 5, 574-577.
- Bowe, P.W.A. (1951), The waveforms of atmospheric and the propagation of very low frequency radio waves, Phil. Mag. 42, 121-138.
- Bradley, P.A., and C. Clarke (1964), Atmospheric radio noise and signals received on directional aeriols at high frequencies, Proc. IEE 111, No. 9, 1534-1540

- Brook, M., and N. Kitagawa (1964), Radiation from lightning discharges in the frequency range 400 to 1000 Mc/s, J. Geophys. Res. 69, 2431-2434.
- Budden, K.G. (1951), The propagation of a radioatmospheric, Phil. Mag. 42, 1-19.
- Burrows, C.R. (1931), The propagation of short radio waves over the north Atlantic, Proc. IRE 19, 1634-1660.
- Carbenay, F. (1952), Correlation between the mean level of atmospherics and the degree of intelligibility of a kilometre-wave radio link, C.R. Acad. Sci. (Paris) 235, 423-425.
- Carbenay, F. (1956), Recording the mean level of atmospherics at kilometric and myriametric wavelengths, C.R. Acad. Sci. (Paris) 243, 1904-1906.
- Carbenay, F. (1959), Recording the mean square value of atmospheric noise, C.R. Acad. Sci. (Paris) 249, 67-68.
- Caton, P.G.F., and E.T. Pierce (1952), The waveforms of atmospherics, Phil. Mag. 43, 393-409.
- Chakravarti, S.P., P.B. Ghosh and E. Ghosh (1939), Atmospherics in radio broadcast reception at Calcutta, Proc. IRE 27, 780-783.
- Chalmers, J.A. (1949), Atmospheric electricity, (Clarendon Press, Oxford).
- Chapman, F.W. (1939), Atmospheric disturbances due to thundercloud discharges, Pt. I, Proc. Phys. Soc. 51, 876-894.
- Chapman, F.W., and W.D. Mathews (1953), Audio-frequency spectrum of atmospherics, Nature 172, 495-497.
- Chapman, J. (1957), The waveforms of atmospherics and the propagation of very low frequency radio waves, J. Atmosph. Terr. Phys. 11, 223-236.
- Chiplonkar, M.W., R.N. Karekar, T.A. Raju, and M.S. Hattiangadi (1958), A preliminary report on the nature and origin of atmospherics, J. Sci. Industr. Res. (India) 17A, 3-23 (suppl.).
- Clarke, C. (1960), Recording atmospheric radio noise, Electronic Technol. 37, 346-349.
- Clarke, C. (1960), A study of atmospheric radio noise received on a narrow bandwidth at 11 Mc/s, Proc. IEE 107B, 311-319.

- Clarke, C. (1962), Atmospheric radio noise studies based on amplitude-probability measurements at Slough, England during the International Geophysical Year, Proc. IEE 109B, 393-404.
- Crichlow, W.Q., Ed. (1960), Radio noise of terrestrial origin, J. Res. NBS 64D (Radio Prop.) No. 6, 637-654.
- Crichlow, W.Q., and R.T. Disney (1964), Terrestrial radio noise, Radio Sci. J. Res. NBS 68D, No. 5, 600-602.
- Fligel', D.S. (1967), Calculations of shapes of atmospherics, Geomagnetizm i Aeronomiya 7, 847-853.
- Franz, K. (1942), The amplitude of noise voltages, Elect. Nachr. Tech. 19, 166-173.
- Fulton, Forrest F., Jr. (1961), Effect of receiver bandwidth on the amplitude distribution of VLF atmospheric noise, J. Res. NBS 65D (Radio Propaga.), No. 3, 299-304.
- Galejs, J. (1967), Amplitude statistics of lightning discharge currents and ELF and VLF radio noise, J. Geophys. Res. 72, 2943-2953.
- Gladshiteyn, N.D. (1967), Statistical properties of noise from the leader of a lightning discharge, Geomagnetizm i Aeronomiya 7, 908-910.
- Harwood, J., and C. Nicolson (1958), Atmospheric radio noise, Electron. Radio Engr. 35, 183-190.
- Harwood, J. (1958), Atmospheric radio noise at frequencies between 10 kc/s and 30 kc/s. Proc. IEE 105B, 293-300
- Harwood, J., and B.N. Harden (1960), The measurement of atmospheric radio noise by an aural comparison method in the range 15-500 kc/s, Proc. IEE 107B, 53-59.
- Hefley, G., R.H. Doherty, and R.F. Linfield (1961), Initial results of a new technique for investigating spheric activity, J. Res. NBS 65D (Radio Prop.), No. 2, 157-166.
- Hepburn, F., and E.T. Pierce (1953), Atmospherics with very low frequency components, Nature 171, 837-838.
- Hepburn, F. (1957), Atmospheric waveforms with very low frequency components below 1 kc/s known as slow tails, J. Atmosph. Terr. Phys. 10, 266-287.

- Hepburn, F. (1960), Analysis of smooth type atmospheric waveforms, J. Atmosph. Terr. Phys. 19, 37-53.
- Herman, J.R. (1961), Reliability of atmospheric radio noise predictions, J. Res. NBS 65D (Radio Prop.), No. 6, 565-574.
- Hersperger, S.P. (1955), A note on the effect of atmospheric noise interference on radio communication systems, Report prepared for CCIR Study Grp. III, Engrg. and Indus. Experi. Sta., Univ. of Florida, Gainesville, Fla. (Apr).
- Hill, E.L. (1957), Electromagnetic radiation from lightning strokes, J. Franklin Inst. 263, 107-119.
- Hill, E.L. (1957), Very low frequency radiation from lightning strokes, Proc. IRE 45, No. 6, 775.
- Hill, R.D. (1966), Electromagnetic radiation from the return stroke of a lightning discharge, J. Geophys. Res. 71, 1963-1967.
- Hill, R.D. (1968), Analysis of irregular paths of lightning channels, J. Geophys. Res. 73, 1897-1906.
- Holzer, R.E., and O.E. Deal (1956), Low audio frequency electromagnetic signals of natural origin, Nature 177, 536-537.
- Horner, F. (1953), The reception of atmospherics at high frequencies, J. Atmosph. Terr. Phys. 4, 129-140.
- Horner, F. (1954), The accuracy of the location of sources of atmospherics by radio direction finding, Proc. IEE 101, Pt. III, 383-390.
- Horner, F., and C. Clarke (1955), Some waveforms of atmospherics and their use in the location of thunderstorms, J. Atmosph. Terr. Phys. 7, 1-13.
- Horner, F., and J. Harwood (1956), An investigation of atmospheric radio noise at very low frequencies, Proc. IEE 103B, 743-751.
- Horner, F., and C. Clarke (1958), Radio noise from lightning discharges, Nature 181, 688-690.
- Horner, F. (1958), The relationship between atmospheric radio noise and lightning, J. Atmosph. Terr. Phys. 13, 140-154.
- Horner, F., Ed. (1962), Radio Noise of Terrestrial Origin (Elsevier Publ., Amsterdam).

- Horner, F. (1964), Radio noise from thunderstorms, in *Advances in Radio Research*, Vol. 2 (Saxton, ed.), (Academic Press, London).
- Horner, F. (1970), Scientific activities of commission VIII, in *Progress in Radio Science 1966-1969*, Vol. 1 (Brown et al., ed.), (URSI, Brussels).
- Hughs, H.G. (1967), on the directional dependency of "slow tail" extremely low frequency atmospheric waveforms, *J. Atmosph. Terr. Phys.* 29, 545-552.
- Ibukun, O. (1966), Structural aspects of atmospheric radio noise in the tropics, *Proc. IEEE* 54, 361-367.
- In'kov, B.K. (1968), The effect of the amplitude-frequency signal spectrum on reading of phase meters used for determination of remoteness of atmospheric sources, *Glaunaya Geofizicheskaya, Atmosfernoye Elektrichestvo, Trudy*, No. 225, 72-73.
- Ishida, T., and M. Higashimura (1957), Measurement of statistical characteristics of HF atmospheric noise, *J. Inst. Elec. Engrs. (Japan)* 40, p.12.
- Ishikawa, H., and M. Takagi (1954), On the fine structure of atmospherics from near origins, *Proc. Res. Inst. Atmos., Nagoya University*, 2 9-25.
- Ishikawa, H., M. Takagi, and T. Takeuti (1958), On the leader waveforms of atmospherics near the origins, *Proc. Res. Inst. Atmos. Nagoya University* 5, 1-11.
- Ishikawa, H. (1961), Nature of lightning discharges as origins of atmospherics, *Proc. Res. Inst. Atmos., Nagoya University* 8A, 1-247.
- Ito, K., T. Kato, and A. Iwai (1955), Local lightning flash counter within 20 km, *Proc. Res. Inst. Atmos., Nagoya University* 3, 6974.
- Iwai, A., K. Ito, T. Tanaka, and T. Ebuchi (1953), Direction finder of atmospherics, *Proc. Res. Inst. Atmos. Nagoya University* 1, 5461.
- Jansky, K.G. (1937), Minimum noise levels obtained on short wave radio receiving systems, *Proc. IRE* 25, 1517-1530.
- Jean, A.G., W.L. Taylor, and J.R. Wait (1960), VLF phase characteristics deduced from atmospheric waveforms, *J. Geophys. Res.* 65, 907-912.
- Jones, D.L. (1970), Numerical computations of terrestrial ELF electromagnetic wave fields in the frequency domain, *Radio Sci.* 5, 803-810.

- Jones, D.L. (1970), Propagation of ELF pulses in the earth-ionosphere cavity and application to "slow-tail" atmospherics, *Radio Sci.* 5, 1153-1162.
- Joscheck, H. (1929), Recording of atmospheric disturbances, *E.N.T.* 6, 341-349.
- Kalinichev, B.P. (1968), Distribution of amplitudes of atmospheric noise, *Elektrosvyaz'* 2, 76-77.
- Kamada, T., and J. Nakajima (1954), The measurement of the intensity of atmospherics, I., *Proc. Res. Inst. Atmospherics, Nagoya University* 2, 31-39.
- Kessler, W.J., and S.P. Hersperger (1952), Recent developments in radio location of thunderstorm centres, *Bull. Amer. Meterol. Soc.* 33, 153-157.
- Kestygov, K.I., and V.A. Zorin (1970), Entire functions in the analysis and representation of distant atmospheres from readings of coordinates of their zeros, *Geomagnetizm i Aeronomiya* 10, No. 2, 273-277.
- Khastigir, S.R., and M.K. Rao (1940), Some studies in high-frequency atmospheric noise at Dacca by the warbler method, *Proc. Inst. Radio Engrs.* 28, 511-513.
- Khastigir, S.R., and A.K. Ray (1940), Atmospherics of distant origin, *Sci. and Culture* 5, 772-773.
- Khastigir, S.R., and M.I. Ali (1942), Investigation on atmospherics in high frequency channels, *Indian J. Phys.* 15, Pt. 6, 399-419.
- Kimpara, A. (1953), The waveform of atmospherics in the daytime, *Proc. Res. Inst. Atmospherics, Nagoya Univ.* 1, 1-11.
- Kimpara, A., and Y. Kimura (1958), On field intensity recording of atmospherics at 27 kc/s in accordance with the recommendation of W.M.O., *Proc. Res. Inst. Atmospherics, Nagoya Univ.* 5, 21-29.
- Konig, H. (1959), Atmospherics of very low frequency, *Z. Angew. Phys.* 11, 264-274.
- Krasnushkin, P.E., and V.D. Shabalin (1969), Dependence of the shape of a nighttime atmospheric on its direction of arrival, *Radiotek. Elektronika* 14, 1491-1495.

- Krivoshein, V.A., and A.B. Orlov (1968), Errors in determination of characteristics of propagation of superlong waves by the method of harmonic analysis of atmospherics, *Problemy Difraktsii i Raspros Rasprostranneniya Voln*, No. 7, 178-197.
- Labodin, T.V., K.A.Semenov, P.S. Lydzar, V.A. Kutyaun, and V.I. Sinegubov (1968), Study of the performance of solid state thunderstorm recorders, Leningrad, *Glaunaya Geofiziches Kaya Obser. Atmos. Eleckt., Trudy*, No. 225, 23-29.
- Laby, T.H. J.J. McNeill, F.G. Nicholls, and A.F.B. Nickson (1940), Waveform, energy and reflexion by the ionosphere of atmospherics, *Proc. Roy. Soc.* 174A, 145-169.
- Lakshminarayan, K.N. (1962), Short-term "time" characteristics of impulsive atmospheric noise, *J. Sci. Industr. Res. (India)* 21D, 228-233.
- Lewis, E.A., R.B. Harvey, and J.E. Rasmussen (1960), Calculation of phase errors in the frequency components of a (VLF) pulse using measured noise amplitude distributions, *Radio Sci.* 3 (New Series), 1091-1097.
- Likhter, Ya. I. (1956), Some statistical properties of atmospherics, *Radiotekh. i. Elektron.* 1, 1295-1302.
- Likhter, Ya. I., and G.J. Terina (1960), Some results of the investigation of the intensity of atmospheric radio noise in Moscow, in *Some Ionospheric Results Obtained During the IGY*, Beynon, ed., 376-382 (Elsevier, Amsterdam).
- Likhter, Ya. I. (1970), Distribution of time intervals between atmospherics, *Geomagnetizm i Aeronomiya* 10, 747-749.
- Linfeld, R.F., and C.A. Samson (1962), Duration and spacing of spheric pulses, *Proc. IRE* 50, 1841.
- Lutkin, F.E. (1938), Directional recording of radio atmospherics, *J. IEE* 82, 289-302.
- Maeda, K., and H. Yokoyama (1937), Automatic measurement of atmospheric noise, *Rep. Radio Res. (Japan)* 7, 153-157.
- Makhotkin, L.G., and B.K. In'kov (1969), Possibility of using the parameters of VLF atmospherics for estimating distance to their sources, *Glaunoy Geofiz. Observa., Trudy*, No. 242, 37-39.

- Malan, D.J. (1958), Radiation from lightning discharges and its relation to the discharge process, *Rec. Adv.*, pp. 557-563.
- Maxwell, E.L., and D.L. Stone (1963), Natural noise fields from 1 c/s to 100 kc, *IEEE Trans. Antennas and Prop.* AP-11, 339-343.
- Maxwell, E.L. (1967), Atmospheric noise from 20 Hz to 30 kHz, *Radio Sci.* 2 (New Series), No. 6, 637-644.
- McKerrow, C.A. (1957), Some recent measurements of atmospheric noise in Canada, *Proc. IRE* 45, 782-786.
- McKerrow, C.A. (1960), Some measurements of atmospheric noise levels at low and very low frequencies in Canada, *J. Geophys. Res.* 65, 1911-1926.
- Mesny, R. (1923), Atmospheric disturbances, *Onde Elec.* 2, 391-405.
- Mikhaylova, G.A. (1967), Spectra of atmospherics at very low frequencies during the night, *Geomagnetizm i Aeronomiya* 7, 357-359.
- Morrison, (1953), The variation with distance in the range 0-100 km of atmospheric waveforms, *Phil. Mag.* 44, 980-986.
- Munro, G.H., and H.C. Webster (1934), Nature of atmospherics, *Nature* 134, 880, 897.
- Nakai, T. (1958), Atmospheric noise study by measurement of the amplitude-probability distribution, *Proc. Res. Inst. Atmos., Nagoya Univ.* 5, 30-49.
- Nakai, T. (1959), Atmospheric noise study at 50 kc, *Proc. Res. Inst. Atmos., Nagoya Univ.* 6, 22-37.
- Nakai, T. (1960), The study of the amplitude probability distributions of atmospheric radio noise, *Proc. Res. Inst. Atmos., Nagoya Univ.* 7, 12-27.
- Nakai, T., and Y. Suzuki (1961), Study of various parameters of atmospheric radio noise at 50 kc/s, *Proc. Res. Inst. Atmos., Nagoya Univ.* 8, 23-37.
- Nakai, T. (1966), The amplitude probability distribution of atmospheric noise, *Proc. Res. Inst. Atmos., Nagoya Univ.* 13, 23-40.

- Norinder, H. (1936), Cathode ray oscillographic investigations on atmospherics, *Proc. IRE* 24, 43-46.
- Norinder, H. (1953), Long-distance location of thunderstorms, *Thunderstorm Electricity*, 267-327.
- Obayashi, T. (1960), Measured frequency spectra of very low-frequency atmospherics, *J. Res. NBS* 64D (Radio Prop.), No. 1, 41-48.
- Ockenden, C.V. (1947), Sferics, *Met. Mag.* 76, 78-86.
- Oguryayev, S. Ye. (1966), Investigation of the threefold distribution of atmospherics and their relationship to the relative duration of their occurrence, *Glaunaya Geofiz. Observa. Atmos. Elekt., Trudy*, No. 188, 24-28.
- Ollendorff, F. (1930), On the radiation field of lightning, *E.N.T.* 7, 108-119.
- Pierce, E.T. (1955), The frequency spectra of the radiating fields from lightning flashes, *Proc. Symp. VLF Waves Atmos., Munich*, Oct. 3.
- Pierce, E.T. (1960), Some ELF phenomena, *J. Res. NBS* 64D (Radio Prop.), No. 4, 383-386.
- Pierce, E.T. (1960), Atmospherics from lightning flashes with multiple strokes, *J. Geophys. Res.* 65, 1867-1871.
- Pierce, E.T., ed. (1969), Progress in radio noise of terrestrial origin, *Radio Sci.* 4, 661-666.
- Potter, R.K. (1931), High-frequency atmospheric noise, *Proc. IRE* 19, 1731-1765.
- Potter, R.K. (1932), An estimate of the frequency distribution of atmospheric noise, *Proc. IRE* 20, 1512-1518.
- Raemer, H.R. (1961), On the spectrum of terrestrial radio noise at extremely low frequencies, *J. Res. NBS* 65D (Radio Prop.), No. 6, 581-594.
- Ranzi, I. (1928), A new method of registering atmospherics, *Nuovo Cimento* 5, 326-330.
- Rao, M. (1967), Note on the corona currents in a lightning discharge and the emission of ELF waves, *Radio Sci.* 2, No. 11, 1394.

- Remizov, L.T., A.V. Potapov, and V.R. Vikhrov (1967), Distribution of the probabilities of intervals between pulses of atmospheric noise, Radiotekhnika i Elektronika 12, 706-708.
- Remizov, L.T., G.A. Podoprigora, S.A. Zaytsev, I.V. Oleynikova, A.T. Smurygov, and V.A. Timofeyev (1969), Recording of natural random low-frequency electromagnetic fields, Radiotekhn. i. Elektron. 14, 1773-1778.
- Remizov, L.T., and S.A. Zaytsev (1970), Observations of weak intensity variations of the field of atmospheric noises at extra low frequencies, Radiotekhn. i. Elektron. 15, 1563-1567.
- Remizov, L.T., V.R. Vichrov, and A.V. Potapov (1970), Statistical variation of number of atmospherics per unit time, Proc. IEE 117, 894-896.
- Rivault, R. (1945), The fine structure of atmospherics: contribution to the study of the ionosphere, C.R. Acad. Sci. (Paris) 221, 540-542.
- Rivault, R. (1950), The fine structure of atmospherics: ionospheric and meteorological applications of type 4, C.R. Acad. Sci. (Paris) 230, 1846-1847.
- Samson, C.A. (1960), Effects of high altitude nuclear explosions on radio noise, J. Res. NBS 64D (Radio Prop.), No. 1, 37-40.
- Sao, K. (1955), Frequency spectrum of the daytime waveform of atmospherics radiated from the return streamer of a lightning flash, Proc. Res. Inst. Atmos., Nagoya Univ. 3, 43-45.
- Sao, K., and H. Jindoh (1961), Researches in the frequency analysis of waveforms of atmospherics, III, Proc. Res. Inst. Atmos., Nagoya Univ. 8, 19-21.
- Satyam, M. (1962), Short term amplitude probability distribution of impulsive atmospheric radio noise, J. Sci. Ind. Res. (India) 21D, 221-227.
- Schafer, J.P., and W.M. Goodall (1939), Peak field strengths of atmospherics due to local thunderstorms at 150 megacycles, Proc. IRE 27, 202-207.
- Schindelbauer, F. (1923), The direction of atmospheric disturbances, Jahrb. d. drahtl. Tel. 22, 163-167.

- Schindelhauer, F. (1928), On electromagnetic disturbances, E.N.T. 5, 442-449.
- Schindelhauer, F. (1929), Electromagnetic disturbances, E.N.T. 6, 231-236.
- Schindelhauer, F. (1939), Direction finding of the transients caused by atmospheric disturbances, Hochfreq. u. Elektroakust. 54, 109-111.
- Schonland, B.F.J. (1932), Atmospheric Electricity (Methuen, London).
- Schonland, B.F.J., J.S. Elder, D.B. Hodges, W.E. Phillips, and J.W. van Wyke (1940), The waveform of atmospherics at night, Proc. Roy. Soc. 176, 180-202.
- Schonland, B.F.J. (1953), Atmospheric Electricity, 2d ed. (Methuen, London).
- Sozin, V.I. (1967), Evaluation of remoteness of storms by amplitudes of atmospherics, Glaunaya Geofiz. Observa., Atmos. Elekt., Trudy, No. 204, 96-99.
- Stergis, C.G., G.C. Rein, and T. Kangas (1957), Electric field measurements above thunderstorms, J. Atmos. Terr. Phys. 11, 83-90.
- Sullivan, A.W., H.M. van Valkenburg, and J.M. Barney (1952), Low frequency atmospheric radio noise in Florida, Trans. Amer. Geophys. Un. 33, p. 650.
- Sullivan, A.W., and J.D. Wells (1957), A lightning stroke counter, Bull. Amer. Meterol. Soc. 38, 291-294.
- Takagi, M., and T. Takeuti (1963), Atmospherics radiation from lightning discharges, Proc. Res. Inst. Atmos., Nagoya Univ. 10, 1-11.
- Taylor, W.L., and A.G. Jean (1959), Very low-frequency radiation spectra of lightning discharges, J. Res. NBS 63D (Radio Prop.), No. 2, 199-204.
- Taylor, W.L. (1960), VLF attenuation for east-west and west-east daytime propagation using atmospherics, J. Geophys. Res. 65, 1933-1938.
- Taylor, W.L. (1960), Daytime attenuation rates in the very low frequency band using atmospherics, J. Res. NBS 64D (radio Prop.), No. 4, 349-356.
- Taylor, W.L. (1963), Radiation field characteristics of lightning discharges in the band 1 kc/s to 100 kc/s, J. Res. NBS 67D (Radio Prop.), No. 5, 539-550.

- Taylor, W.L. (1967), VLF transmission loss calculations from spectral analyses of atmospherics, *Radio Sci.* 2 (New Series), No. 2, 139-146.
- Taylor, W.L., and K. Sao (1970), ELF attenuation rates and phase velocities observed from slow-tail components of atmospherics, *Radio Sci.* 5, 1453-1460.
- Tepley, L.R. (1959), A comparison of sferics as observed in the VLF and ELF bands, *J. Geophys. Res.* 64, No. 12, 2315-2329.
- Thomas, B.A., and R.E. Burgess (1947), Survey of existing information and data on radio noise over the frequency range 1-20 Mc/s, *Radio Res. Special Rept. No. 15*, HMSO, London, Code No. 47-29-15.
- URSI (1962), The measurement of characteristics of terrestrial radio noise, *Special Report No. 7* (Elsevier, Amsterdam).
- Wait, J.R. (1956), On the waveform of a radio atmospheric at short ranges, *Proc. IRE* 44, p. 1052.
- Wait, J.R. (1960), On the theory of the slow-tail portion of atmospheric waveforms, *J. Geophys. Res.* 65, 1939-1946.
- Watson-Watt, R.A., J.F. Herd, and F.E. Lutkin (1937), On the nature of atmospherics, V., *Proc. Roy. Soc.* 162, 267-291.
- Watt, A.D., and E.L. Maxwell (1957), Measured statistical characteristics of VLF atmospheric radio noise, *Proc. IRE* 45, 55-62.
- Watt, A.D., and E.L. Maxwell (1957), Characteristics of atmospheric noise from 1 to 100 kc, *Proc. IRE* 45, 787-794.
- Watt, A.D., R. Coon, E.L. Maxwell, and P.W. Plush (1958), Performance of some systems in the presence of thermal and atmospheric noise, *Proc. IRE* 46, 1914-1923.
- Watt, A.D. (1960), ELF electric fields from thunderstorms, *J. Res. NBS* 64D (Radio Prop.), No. 5, 425-434.
- Wormell, T.W. (1953), Lightning, *Quart. J. Roy. Meteorol. Soc.* 79, 474-489.
- Yokoyama, E., and T. Nakai (1929), A note on the directional observations on grinders in Japan, *Proc. IRE* 47, 377-379.

BIBLIOGRAPHIC DATA SHEET

1. PUBLICATION OR REPORT NO. OTR 75-63		2. Gov't Accession No.	3. Recipient's Accession No.
4. TITLE AND SUBTITLE Man-made Radio Noise Part II: Bibliography of Measurement Data, Applications, and Measurement Methods		5. Publication Date May 1975	
7. AUTHOR(S) A. D. Spaulding, R. T. Disney, A. G. Hubbard		6. Performing Organization Code OT/ITS	
8. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Department of Commerce Office of Telecommunications Institute for Telecommunication Sciences 325 Broadway, Boulder, Colorado 80302		9. Project/Task Work Unit No.	
11. Sponsoring Organization Name and Address U.S. Department of Commerce Office of Telecommunications 1325 G Street, N.W. Washington, D.C. 20005		10. Contract Grant No.	
14. SUPPLEMENTARY NOTES		12. Type of Report and Period Covered	
15. ABSTRACT (A 200-word or less factual summary of most significant information. If document includes a significant bibliography of literature survey, mention it here.) The Office of Telecommunications, Institute for Telecommunication Sciences (OT/ITS), over the past several years, has accumulated a data base of man-made radio noise measurements in the frequency range from 250 kHz to 250 MHz taken in a number of geographical areas. Man-made Radio Noise, Part I (OT Report 74-38) gives the results of the analysis of this base and provides estimates of the man-made noise levels and characteristics to be expected in typical locations. This part of the report (Part II) is a compilation of references relating to man-made radio noise. This bibliography is divided into five sections: Section I, Measurements and Data; Section II, Applications to Systems and Mathematical Modeling; Section III, Measurement Experiments and Methods; Section IV, General; and Section V, Atmospheric Radio Noise.		13.	
16. Key words (Alphabetical order, separated by semicolons) Atmospheric radio noise; impulsive noise; man-made radio noise; noise characteristics; noise measurement; system performance.			
17. AVAILABILITY STATEMENT ☒ UNLIMITED. ☐ FOR OFFICIAL DISTRIBUTION		18. Security Class (This report) Unclassified 19. Security Class (This page) Unclassified	20. Number of pages 108 21. Price

